

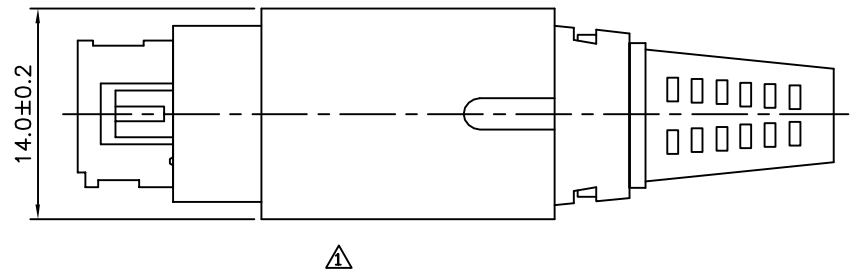


SPECIFICATION
 Rating: 20V DC 7.5A Max.
 Dielectric Strength: 250V AC For 1 Minute
 Insulation Resistance: 50 Megaohms Min.
 At 250V DC
 RoHS Compliant

- △ MDP 04 P A - H
 (1) (2) (3) (4) (5)
 (1) MDP:Mini Din Power Jack
 (2) 04:No. Of Position
 (3) P:Male
 (4) A:Solder Wire Assembly Type
 (5) H:RoHS Compliant



Item	Part Name	Q'ty	Material	Remark
9	Strain Relief	1	PVC	
8	Inner Hood	1	ABS	
7	Coil Spring	1	Steel	
6	Metal Cover	1	Brass	Nickel Plated
5	Plastic Ring	1	POM	
4	Body With Pin	1	PBT	
		4	Brass	Silver Plated
3	Clamp	1	Brass	Nickel Plated
2	Metal Sleeve	1	Brass	Nickel Plated
1	Outer Hood	1	ABS	

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.2 .X ±0.2
PART No. MDP04PA-H		EMILY		
DRAWING No. MDP04PA-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY SONG		
REV.	A1	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	05/17/2012
△ A0		NEW RELEASE		