
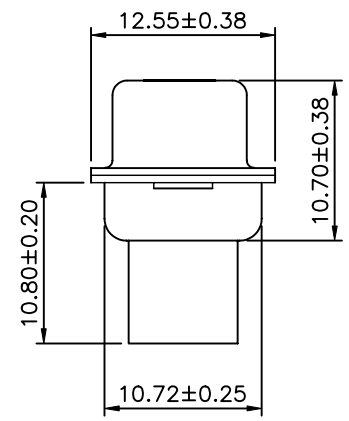
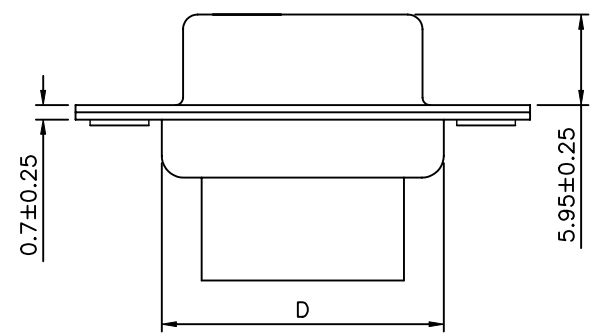


**SPECIFICATION**  
 Dielectric Withstanding Voltage:500 V AC Min  
 Insulation Resistance:1000 Megaohms Min  
 Temperature Rating:-55°C~+105°C  
 Insulator:PBT Thermoplastic,30% Glass Filled,UL 94V-0 Rated,Black Color  
 Shell:Steel,Nickel Finished  
 RoHS Compliant

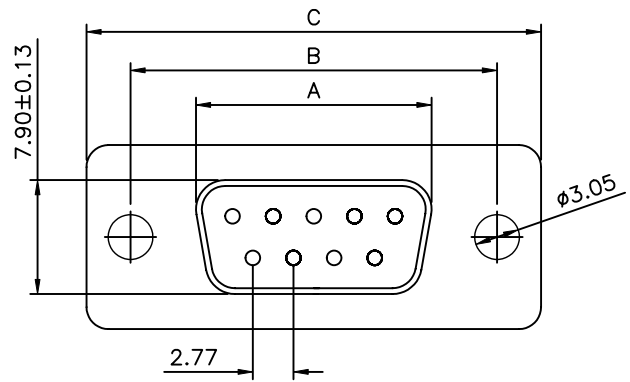

Contact	A ±0.25	B ±0.13	C ±0.38	D ±0.25
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .XX ±0.13 AGE ±2'
PART No. DCXXST-H		MEI		
DRAWING No. DCXXST-H		CHECKED BY HZF		
		DRAWING BY LXX		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	04/27/2008