

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/08'	~	

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE:30mΩ max.
- 1.1 INSULATION RESISTANCE:1000MΩ min.
- 1.2 CURRENT RATING:1.5A.
- 1.3 VOLTAGE RATING:30VDC.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.
- 1.5 TEMPERATURE RANGE: -45°C ~ +110°C.


2. MATERIALS:

- 2.0 HOUSING:PBT+30% GLASS FIBER(UL 94-0).
- 2.1 CONTACT:COPPER ALLOY
- 2.2 SHELL:COPPER ALLOY.

3. PRODUCT NUMBER CODE:

DS1099-01 - X X X

- CONTACT PLATING
- 0: Selective Gold Flash
- 03: Selective Gold 3u"
- 30: Selective Gold 30u"
- SHELL PLATING
- N: Nickel
- 6: Tin
- COLOR OF HOUSING:
- W: WHITE
- B: BLACK
- SERIES No.
- DS1099-01 series

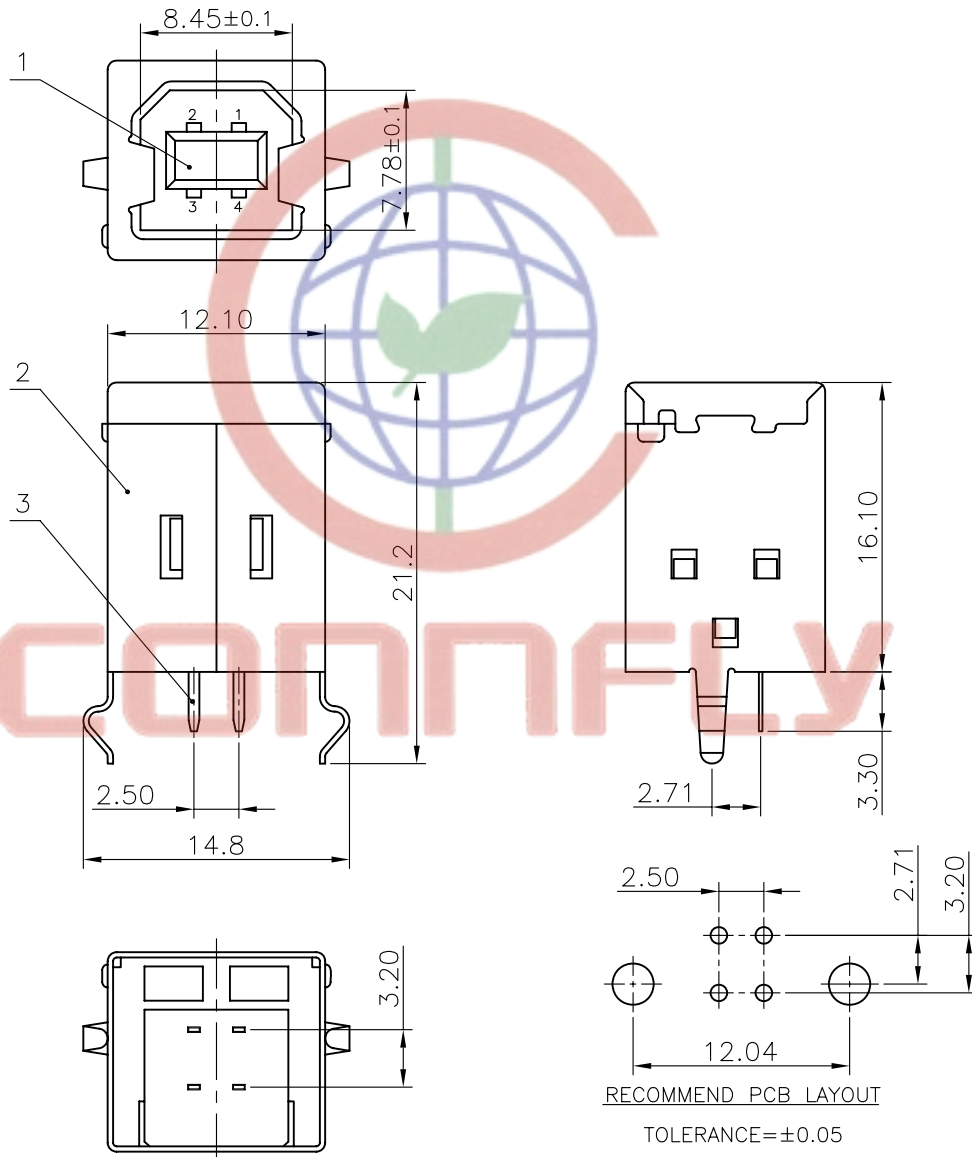

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE				ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	
X.	±0.60	X.	±5°	mm	USB B TYPE FEMALE V/T DIP TYPE				
.X	±0.38	.X	±3°	A4	SERIES DS1099-01 SERIES				
.XX	±0.25	.XX	±2°						
3	CONTACT	COPPER ALLOY	SEE NOTES	DRAWING TYPE	CUSTOMER				
2	SHELL	COPPER ALLOY	SEE NOTES	SCALE	1:1	SHEET	1 OF 1		
1	HOUSING	PBT	UL 94 V-0	DRAWING NO.	C-DS1099-01-XXX				
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED					



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD