
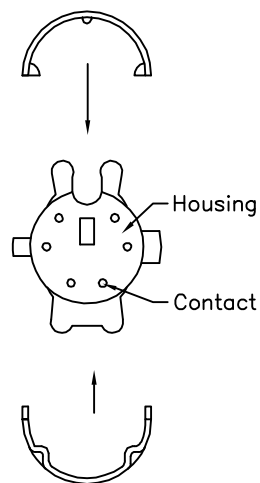
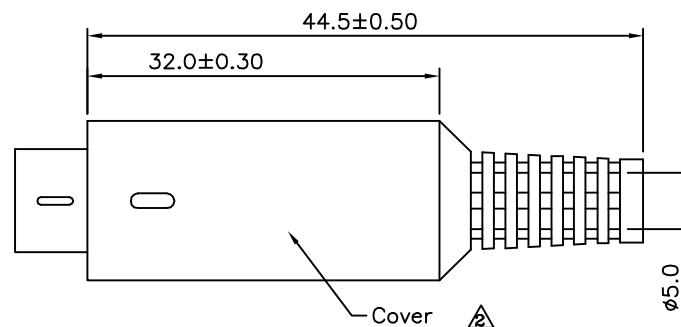
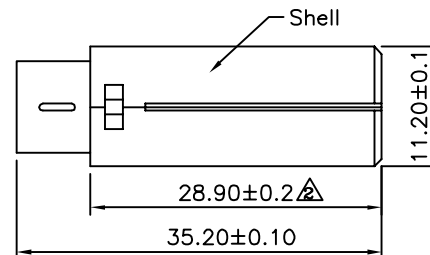


△ SPECIFICATION

Rating: 100V AC 1A Max.
 Insulation Resistance: 50 Megaohms Min. At 500V DC
 Dielectric Strength: 500V AC/1 Minute
 Insertion Force: 4.5kg Max.
 Withdrawal Force: 0.9kg~3kg
 Cover: EVA+PE-LL
 Shell: ABS
 Metal Shield: Brass, Nickel Plated
 △ Housing: PA6+FB
 Contact: Brass, Silver Plated
 RoHS Compliant

△ MDA XX P - H
 (1) (2) (3) (4)

(1) MDA: Mini Din Solder Wire Assembly Type
 (2) XX: No. Of Position
 (3) P: Male
 (4) H: RoHS Compliant

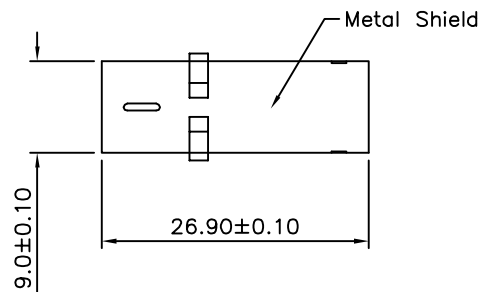

| | | | | | |
|----|----|----|----|----|----|
| | | | | | |
| 3P | 4P | 5P | 6P | 7P | 8P |

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | | | | |
|---------------------|----|----------------|--|--|-----------|-----|------|
| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 △ .XX ±0.10 ANG. | | | |
| PART No. MDAXP-H | | EMILY | | | | | |
| DRAWING No. MDAXP-H | | CHECKED BY HZF | | | | | |
| SCALE NONE | | DRAWING BY GAO | | | | | |
| REV. | B2 | UNIT mm | | NO. REV. | REVISIONS | CHK | DATE |

| | | | |
|------|-------------|-------|------------|
| △ B2 | Modify Data | HZF | 08/23/2013 |
| △ B1 | Add UL94V-0 | HZF | 11/23/2010 |
| △ B0 | NEW RELEASE | EMILY | 09/17/2008 |