
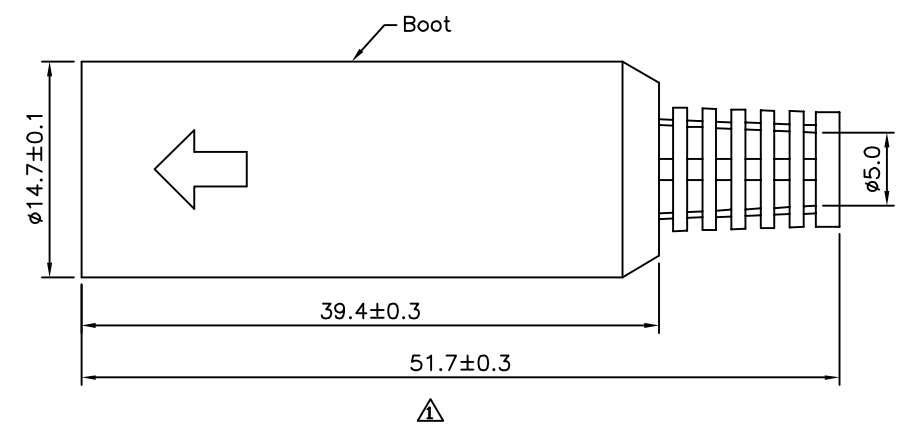



△ SPECIFICATION

Rating:100V AC 1A Max. Or 12V DC 2A Max.
 Dielectric Strength:250V AC At 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:50 Megaohms Min. At 250V DC
 Operation Temperature:-20°C~+105°C
 Insertion Force:4.5Kg Max.
 Withdrawal Force:0.9Kg~3Kg
 Boot:PE+2L
 Middle Hood:HIPS(PH-88)
 Metal Shell:Copper,Nickel Plated
 Insulator:PA6+G.F.
 Pin Contact:Brass,Silver Plated
 RoHS Compliant

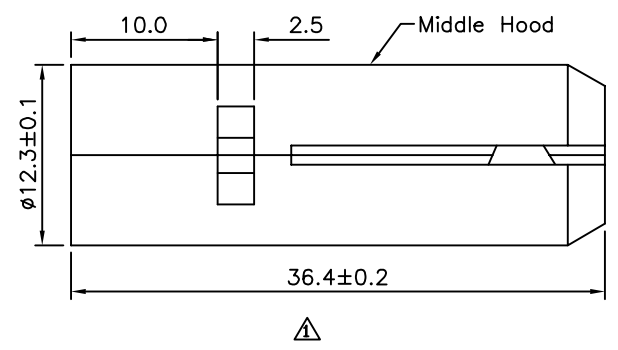

△ MDA XX S - H
 (1) (2) (3) (4)

- (1) MDA:Mini Din Solder Wire Assembly Type
- (2) XX:No. Of Position
- (3) S:Female
- (4) H:RoHS Compliant

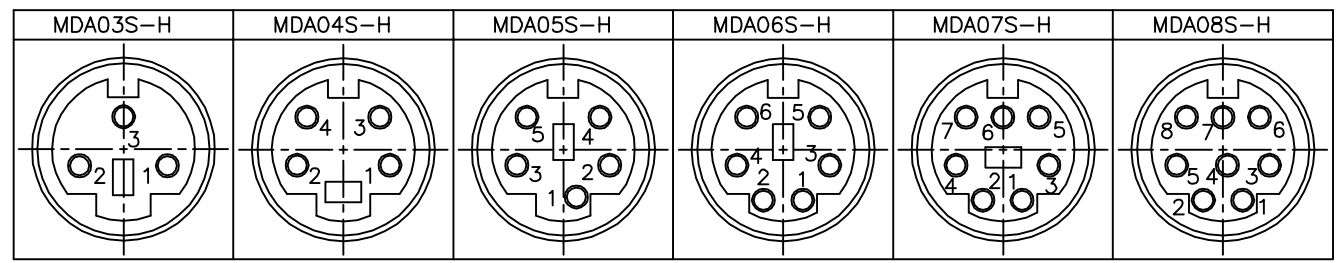

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|----------------------|----|-----------------|--|--|
| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.1 .XX ±0.05 ANG. UNIT mm |
| PART No. MDAXXS-H | | EMILY | | |
| DRAWING No. MDAXXS-H | | CHECKED BY HZF | | |
| SCALE NONE | | DRAWING BY SONG | | |
| REV. | A2 | NO. | | DATE |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A2 | | Modify Data | HZF | 06/11/2014 |
| △ A1 | | Modify Data | HZF | 03/18/2010 |
| △ A0 | | NEW RELEASE | HZF | |