




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		

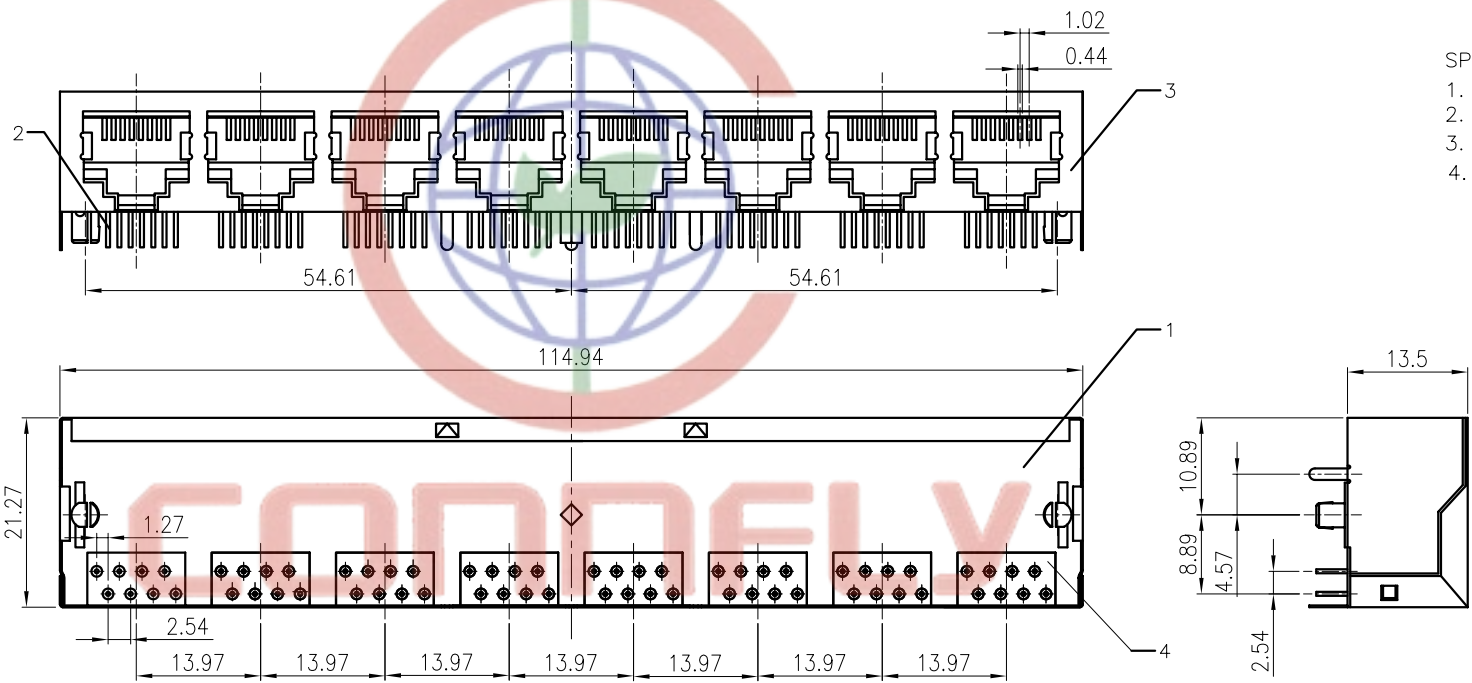

SPECIFICATION

- Insulation Resistance:1000MΩ Min.
- Withstand Voltage:500V AC/Minute.
- Durability:600 Cycles Min.
- Product Number Code:
DS1130-X X X X X

- Housing Materials
P:PBT
N:NYLON
- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket
- Series No.
DS1130

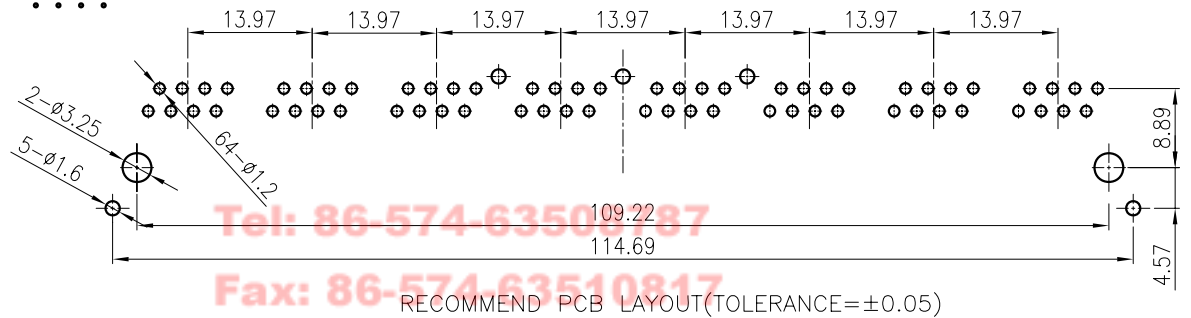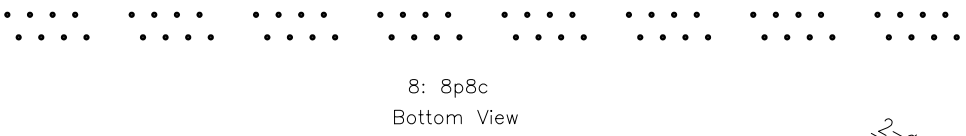

Tel: 86-574-63507887
Fax: 86-574-63510817

(4)	COVER	8	PBT OR NYLON	UL94 V-0 OR 94 V-2
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERAIL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1 SHEET 1 OF 1	
DRAWING NO.		C-DS1130-XXXX	

PROJECTION		TITLE	PCB JACK 8 PORT
UNITS	mm	SERIES	DS1130 SERIES
SHEET SIZE		A4	

CONNFLY 晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD