
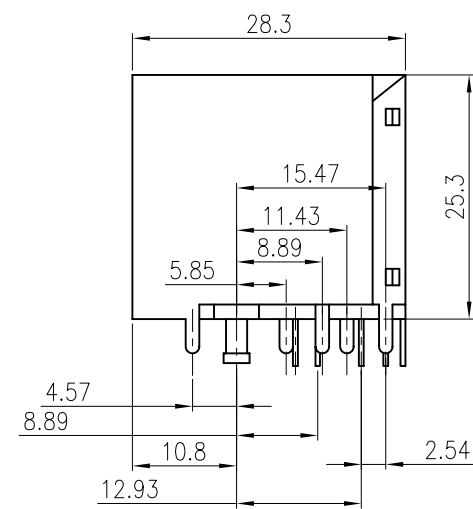


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 03/26/06'		



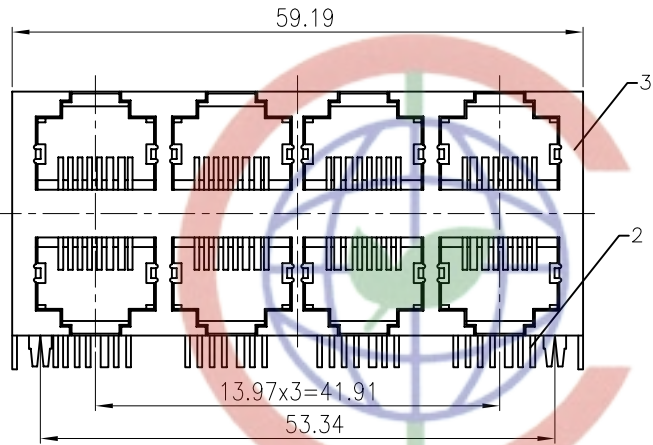


SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Operating Temperature:-40°C+85°C
5. Product Number Code:

DS1131-X X X X X

- Housing Materials
P:PBT
N:NYLON
- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold Flash
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket
- Series No.
DS1131

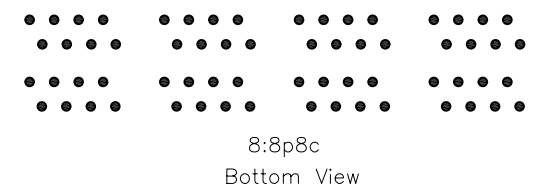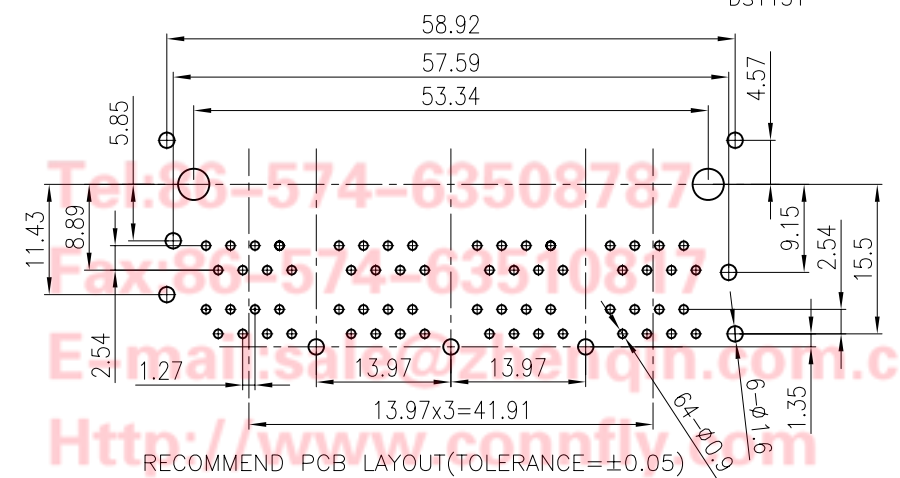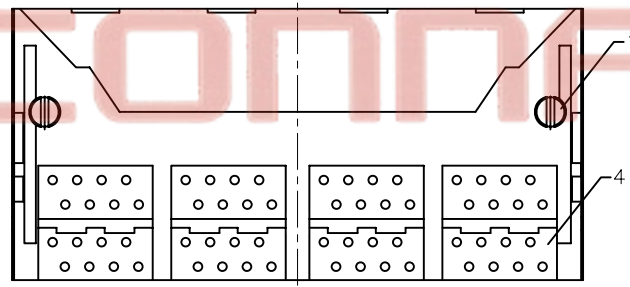

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		PCB JACK DUAL 8P
.X	±0.38	.X	±3°	UNITS	mm
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
				SERIES	DS1131 SERIES
				晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD	
DRAWING TYPE		CUSTOMER			
SCALE		1:1		SHEET 1 OF 1	
DRAWING NO.		C-DS1131-XXXXX			

No.	PART NAME	QTY	MATERIAL	REMARK
(4)	COVER	8	PBT OR NYLON	UL94 V-0 OR 94 V-2
(3)	SHIELDING	1	COPPER ALLAY WITH NICKEL PLATED	0.25mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2