


△△ SPECIFICATION

Bottom Housing: PA46+G.F.(UL94V-0),Black
 Bottom Insert Housing: PA46+G.F.(UL94V-0),Black
 Top Housing: PBT+G.F.(UL94V-0),Black
 Top Insert Housing: PBT+G.F.(UL94V-0),Black
 Contact: Phosphor Bronze
 LED: Steel, Tin Plated On Solder Tails
 Shield: Brass, Nickel Plated
 Cavity Confirms To FCC Rules And Regulations Part 68, Subpart F.
 RoHS Compliant

△△ MJ UL 0808 B01 F F XX X X - H H
 (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11)

- (1) MJ: Modular Jack Gang Type
- (2) UL: Upper LED Series
- (3) 0808: 8P8C
- (4) B01: Dual Deck 2X01
- (5) F: Full Shielded
- (6) F: With Panel Ground
- (7) XX: Contact Finish
- 06: Gold Plated 6u" On Contact Area, Gold Flash On Other Area, Over Nickel
- 15: Gold Plated 15u" On Contact Area, Gold Flash On Other Area, Over Nickel
- 30: Gold Plated 30u" On Contact Area, Gold Flash On Other Area, Over Nickel
- 50: Gold Plated 50u" On Contact Area, Gold Flash On Other Area, Over Nickel
- (8) X: Right LED Position
- (9) X: Left LED Position
- (10) H: Withstand High Temperature Soldering
- (11) H: RoHS Compliant

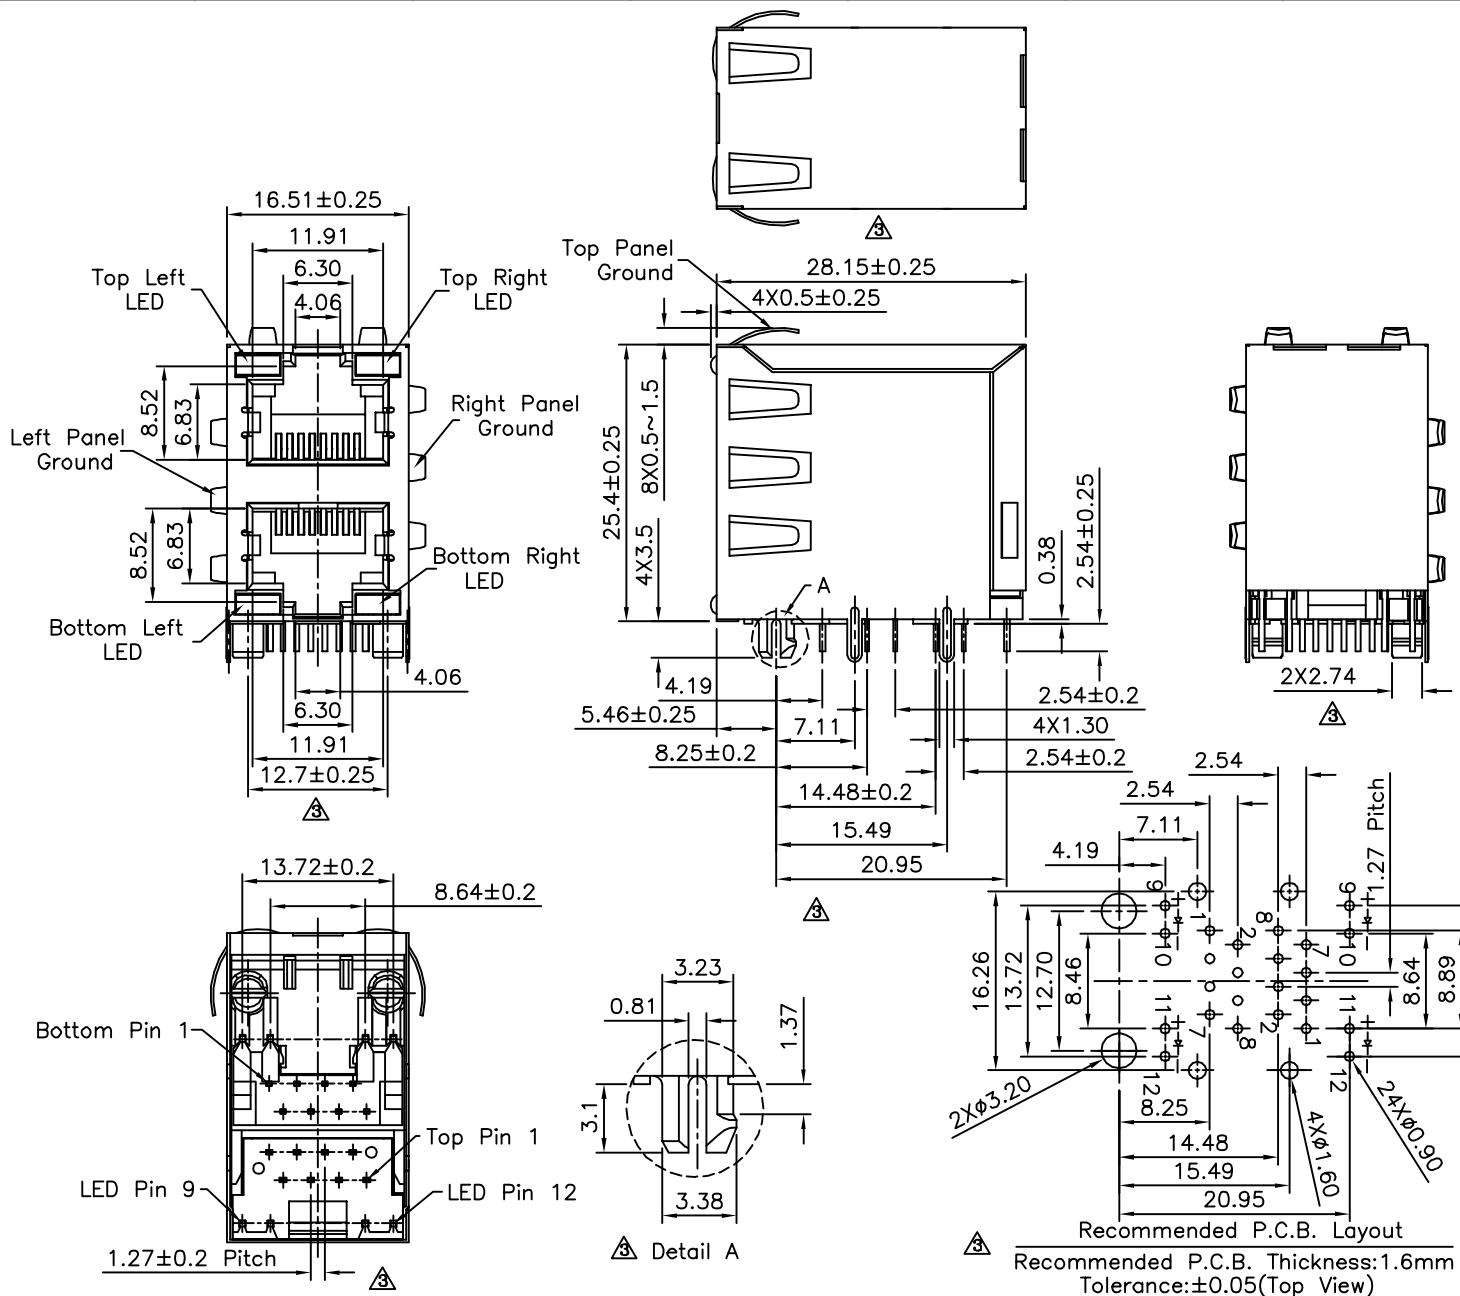

LED Color					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	E	Yellow	Green
Y	Yellow	---	F	Red	Green
R	Red	---	H	Red	Yellow
N	Amber	---	I	Beige	---
O	Orange	---	J	Green	Orange
A	Green	Red	K	Black	---
C	Green	Yellow (Amber)	L	Lime	---
D	Yellow	Red	M	Orange	Green

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △△ .X ±0.25 △△ .XX ±0.13 △△ .XXX ±0.05
PART No. MJUL0808B01FFXXX-HH		MEI		
DRAWING No. MJUL0808B01FFXXX-HH		CHECKED BY HZF		
SCALE NONE		DRAWING BY SONG		
REV.	A3	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify P/N: MJUL0808B01FFXXX-HH → MJUL0808B01FFXXX-HH	HZF	05/03/2012
△A2		Modify P/N: MJUL0808B01FF06GY → MJUL0808B01FFXXX-HH	HZF	03/26/2010
△A1		Modify Specifications	SHIN	01/05/2007
△A0		NEW RELEASE	BECKY	11/18/2005