
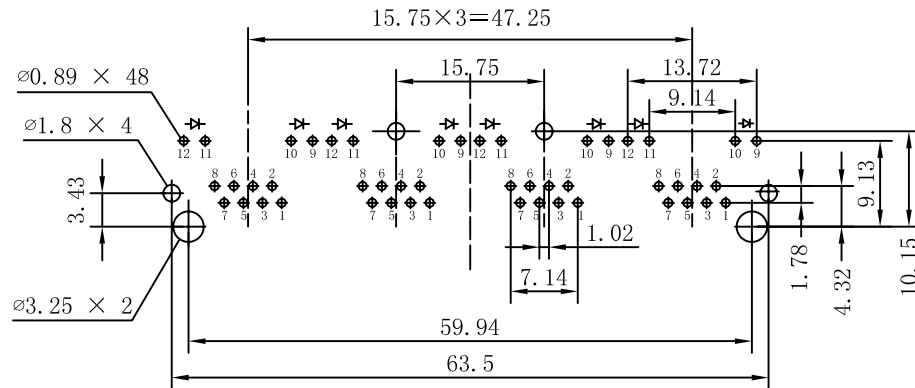
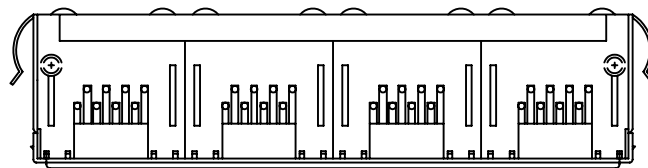
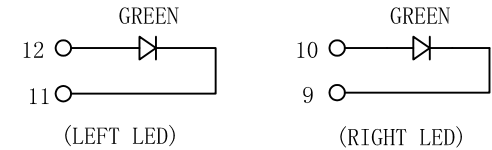



REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		07/11/2009	

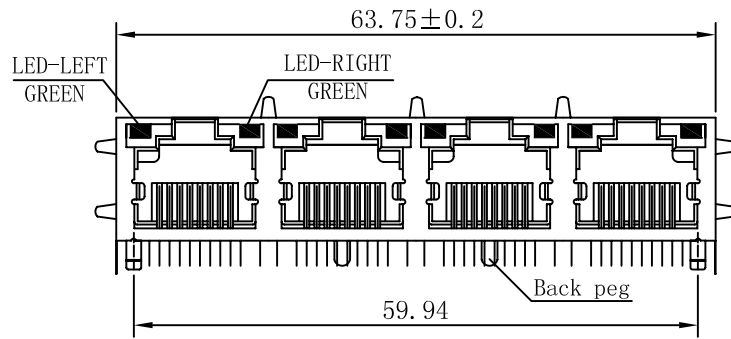

PC Board Layout (TOP VIEW)
Component Side Shown

NOTES:

MATERIAL:

- HOUSING MATERIAL
- CONTACT MATERIAL
- PLATING
- SHIELD

:GLASS FILLED POLYESTER UL94V-0.
:PHOSPHOR BRONZE \varnothing 0.46mm.
:GOLD PLATING OVER NICKEL.
:0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

- LED
- UL CERTIFICATION

:OPTION
:FILE NUMBER E321120

ELECTRICAL:

- VOLTAGE RATING
- CURRENT RATING
- CONTACT RESISTANCE
- INSULATION RESISTANCE
- DIELECTRIC WITHSTANDING RESISTANCE

:125VAC RMS.
:1.5AMP.
:30 MILLIOHMS MAX.
:500MEGOHMS MIN @ 500V DC.
:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- DURABILITY
- PCB RETENTION PRE-SOLDER

:750 CYCLES MIN.
:1LB MIN.

GOLD PLATING:

- | | | |
|--------------------------------|-------------------------------|---|
| 1.5U" <input type="checkbox"/> | 3U" <input type="checkbox"/> | 6U" <input checked="" type="checkbox"/> |
| 15U" <input type="checkbox"/> | 30U" <input type="checkbox"/> | 50U" <input type="checkbox"/> |

ENVIRONMENTAL:

- STORAGE
- OPERATION

:-40°C TO 85°C.
:0°C TO 70°C.



X:X	±0.20	APPD:	Trxcom
X:XX	±0.10	CHKD:	ShenZhen Trxcom Electronics Co.,ltd
X:XXX	±0.05	DR: C.H.Y	Title: SIDE ENTRY PCB JACK WITH SHIELD
ANGLES	±1°	UNIT: mm	PART NO.: TRJE401AWN
	SCALE: 1/1	SHEET: 1/1	REV: A
			DWG NO.: TRC09110701