

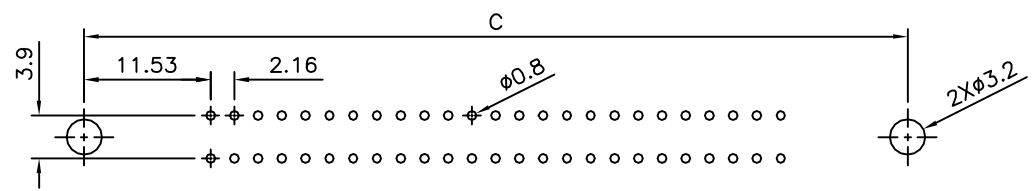


SPECIFICATION

Current Rating:5 Amp
 Withstand Voltage:1000V For 1 Minute
 Contact Resistance:25 Milliohms Max. Mated
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Temperature Range:-55°C~+105°C
 Insulator:PBT+G.F.(UL94V-0),Blue
 Contact:Phosphor Bronze,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:Steel,Nickel Plated
 RoHS Compliant




Recommended P.C.B. Layout

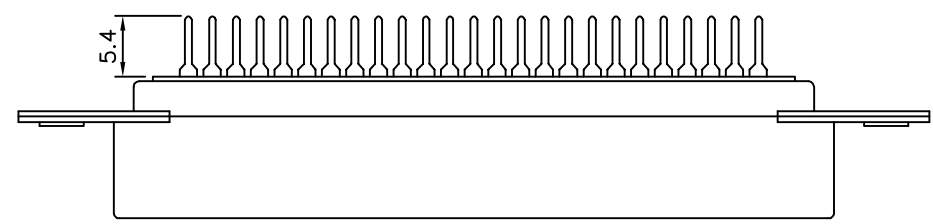

C D XX P - H
 (1) (2) (3) (4) (5)

- (1) C:Centronic Connector
- (2) D:DIP Straight
- (3) XX:No. Of Position
- (4) P:Male
- (5) H:RoHS Compliant

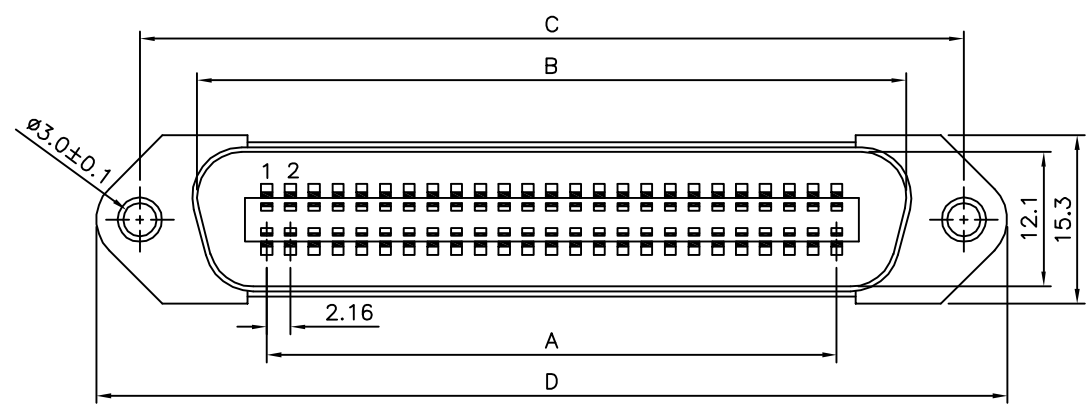

Pin	A	B	C	D	E	F
14	12.96	25.3	36.0	44.0	9.0	12.6
24	23.76	36.2	46.8	54.8	8.9	12.55
36	36.72	49.2	59.7	67.7	8.9	12.55
50	51.84	64.4	74.9	82.8	8.8	12.55

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.15 .XXX ±0.05 ANG. ±3.0°
PART No. CDXXP-H		CHECKED BY HZF		
DRAWING No. CDXXP-H		DRAWING BY GAO		
SCALE	NONE	REV.	A0	
UNIT mm		REV. A0		NO. REV.

NEW RELEASE		HZF		01/08/2013	
REVISIONS		CHK		DATE	