

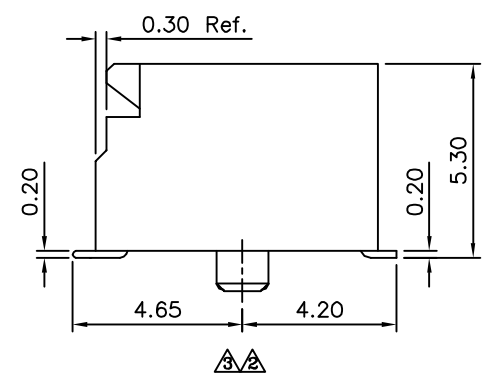
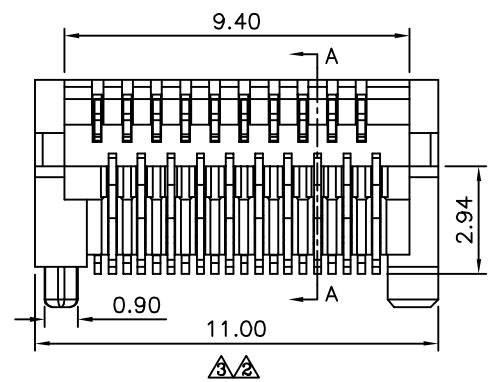


**△△△ SPECIFICATION**  
 Dielectric Withstanding Voltage:300V AC/Minute  
 Contact Resistance:20 Milliohms Max. Initial  
 Operation Temperature:-40°C~+85°C  
 Storage Temperature:-55°C~+105°C  
 Reflow Soldering:230°C Max. For 20s  
 Durability:100 Cycles Min.  
 Insertion/Extractor Force:40N Max./11.5N Max.  
 Insulator:LCP(UL94V-0),Black  
 Contacts:Copper Alloy,Gold Plated On Contact Area,  
 Matte Tin Plated On Solder Tails,Over Nickel  
 RoHS Compliant

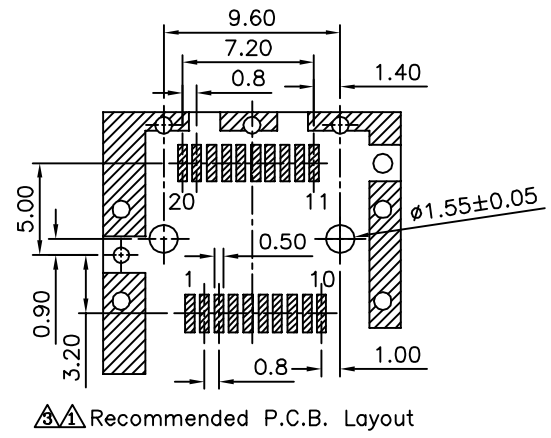

**△ SFP 20 W P - H**  
 (1) (2) (3) (4) (5)  
 (1) SFP:SFP Connector  
 (2) 20:No. Of Position  
 (3) W:SMT Right Angle  
 (4) P:With Post  
 (5) H:RoHS Compliant

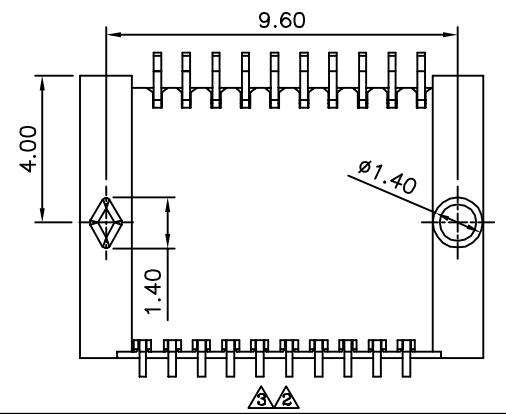

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.15 .XXX ±0.10 ANG. ±0.5°
PART No. SFP20WP-H		MEI		
DRAWING No. SFP20WP-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY SONG		
REV.	A3	UNIT mm		

△ A3	Modify Data	HZF	02/24/2014
△ A2	Modify Data	HZF	02/10/2012
△ A1	Modify Data	HZF	10/21/2009
△ A0	NEW RELEASE	HZF	02/13/2008
NO. REV.	REVISIONS	CHK	DATE