
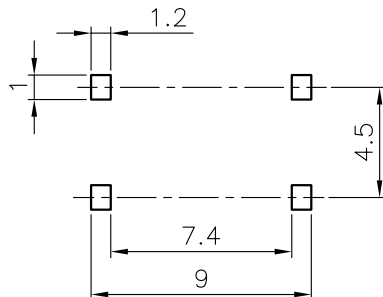

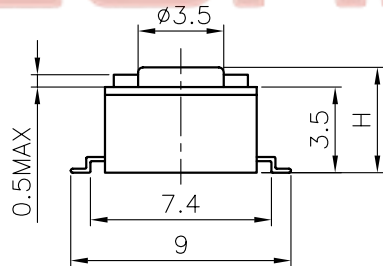


NOTES:

1. SPECIFICATIONS

- . Switch Function: Single Pole Single Throw
- . Contact Rating: 50mA at 12Vdc
- . Insulation Resistance: 100MΩ min.
- . Contact Resistance: 100mΩ max.
- . Operating Life: 100,00 cycles

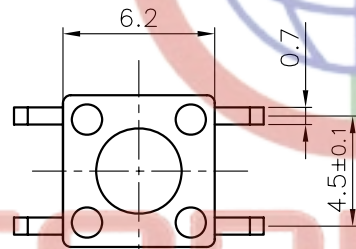

Recommend PCB layout  
Tolerance ±0.05

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 23/06/05		


- . Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3Kgf Shall Be Applied In The Direction
- . Operation Temperature Range: -25°C to +70°C
- . Wave Soldering: Recommended Solder Temperature At 500°F(260°C)max. 5 Seconds, Subject To PCB 1.6mm Thickness.
- . Hand Soldering: Use Soldering Iron Of 30 Watts, Controlled At 608°F(320°C) Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1109-01 - X X X X X

- Packing type  
A: polybag  
B: tube  
R: tape & reel
- Actuator color  
K: black
- Housing color  
K: black
- Profile Height(DIM. H)  
1: 4.3mm 2: 5.0mm 3: 7.0mm  
4: 7.3mm 5: 9.5mm
- Size  
1: 6mm\*6mm

CIRCUIT DIAGRAM







Tel: 86-574-63508717  
Fax: 86-574-63510817  
E-mail: sale@zhenqin.com.cn  
Http://www.connfly.com

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE
X. ±0.60	X. ±5°	UNITS	mm	TACT SWITCH SMT TYPE 6mmX6mm
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES DS1109-01
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE	CUSTOMER			
SCALE	1:1 SHEET 1 OF 1			
DRAWING NO.	C-DS1109-01-1XXXX			

NOTES:

1. SPECIFICATIONS

- . Switch Function: Single Pole Single Throw
- . Contact Rating: 50mA at 12Vdc
- . Insulation Resistance: 100MΩ min.
- . Contact Resistance: 100mΩ max.
- . Operating Life: 100,00 cycles

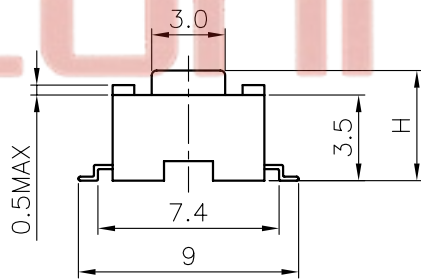

Recommend PCB layout  
Tolerance ±0.05

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/15/06		


- . Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3Kgf Shall Be Applied In The Direction
- . Operation Temperature Range: -25°C to +70°C
- . Wave Soldering: Recommended Solder Temperature At 500°F(260°C)max. 5 Seconds, Subject To pcb 1.6mm Thickness.
- . Hand Soldering: Use Soldering Iron Of 30 Watts, Controlled At 608°F(320°C) Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1109-01 - X X X X X

- Packing type  
A: polybag  
B: tube  
R: tape & reel
- Actuator color  
K: black
- Housing color  
K: black
- Profile Height(DIM. H)  
1: 4.3mm 2: 5.0mm 3: 7.0mm  
4: 7.3mm 5: 9.5mm
- Size  
2: 3mm\*6mm

CIRCUIT DIAGRAM



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	TACT SWITCH DIP TYPE 3mmX6mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1109-01
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1109-01-2XXXX					

Tel: 86-574-63508517  
 Fax: 86-574-63510517  
 E-mail: sale@zhenqin.com.cn  
 Http://www.connfly.com