





NOTES:

1. SPECIFICATIONS

- Switch Function: Single Pole Single Throw
- Contact Rating: 50mA at 12Vdc
- Insulation Resistance: 100MΩ min.
- Contact Resistance: 100mΩ max.
- Operating Life: 100,00 cycles

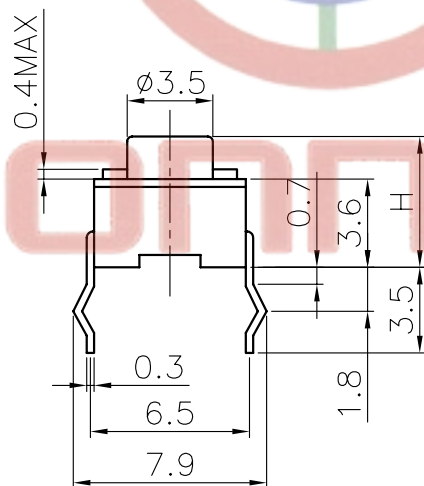

Circuit

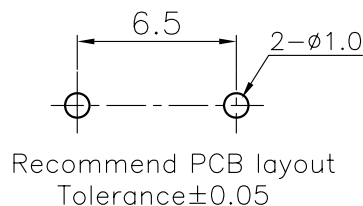



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/15/06		

- Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3Kgf Shall Be Applied In The Direction
- Operation Temperature Range: -25°C to +70°C
- Wave Soldering: Recommended Solder Temperature At 500°F(260°C)max. 5 Seconds, Subject To pcb 1.6mm Thickness.
- Hand Soldering: Use Soldering Iron Of 30 Watts, Controlled At 608°F(320°C) Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1109 - X X X X X

- Packing type
A: polybag
B: tube
- Actuator color
K: black
- Housing color
K: black
- Profile Height(DIM. H)
1: 4.3mm 2: 5.0mm 3: 7.0mm
4: 7.3mm 5: 9.5mm 6: 13.0mm
- Size
2: 3mm*6mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X. ±0.60		X. ±5°		UNITS	mm	TACT SWITCH DIP TYPE 3mmX6mm	
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1109
.XX ±0.25		.XX ±2°		<div> 晨翔电子有限公司</div> <div>CONNFLY CONNFLY ELECTRONIC CO. LTD</div>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1109-2XXXX					






晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD


NOTES:

1. SPECIFICATIONS

- Switch Function: Single Pole Single Throw
- Contact Rating: 50mA at 12Vdc
- Insulation Resistance:100MΩ min.
- Contact Resistance:100mΩ max.
- Operating Life:100,00 cycles

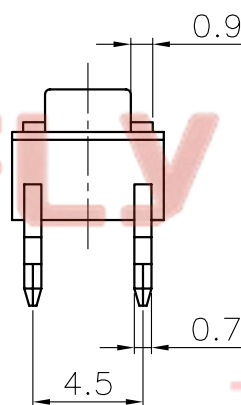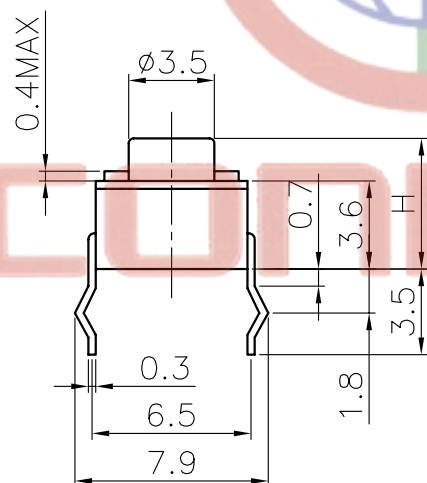

Recommend PCB layout
Tolerance±0.05



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 23/06/05		

- Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3Kgf Shall Be Applied In The Direction
- Operation Temperature Range: -25°C to +70°C
- Wave Soldering: Recommended Solder Temperature At 500°f(260°C)max. 5 Seconds,Subject To pcb 1.6mm Thickness.
- Hand Soldering: Use Soldering Iron Of 30 Watts,Controlled At 608°f(320°C)Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1109 - X X X X X

- Packing type
A: polybag
B: tube
- Actuator color
K: black
- Housing color
K: black
- Profile Height(DIM. H)
1:4.3mm 2:5.0mm 3:7.0mm
4:7.3mm 5:9.5mm 6:13.0mm
- Size
1: 6mm*6mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE
X.	±0.60	X.	±5°	⊕	mm	TACT SWITCH DIP TYPE 6mmX6mm
.X	±0.38	.X	±3°			
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER			SHEET SIZE	A4	SERIES DS1109
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1109-1XXXX					



晨翔电子有限公司



CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508117
Fax:86-574-63510217
E-mail:sale@zhenqin.com.cn
Http://www.connfly.com


NOTES:

1. SPECIFICATIONS


- . Switch Function: Single Pole Single Throw
- . Contact Rating: 50mA at 12Vdc
- . Insulation Resistance:100M Ω min.
- . Contact Resistance:100m Ω max.
- . Operating Life:100,00 cycles

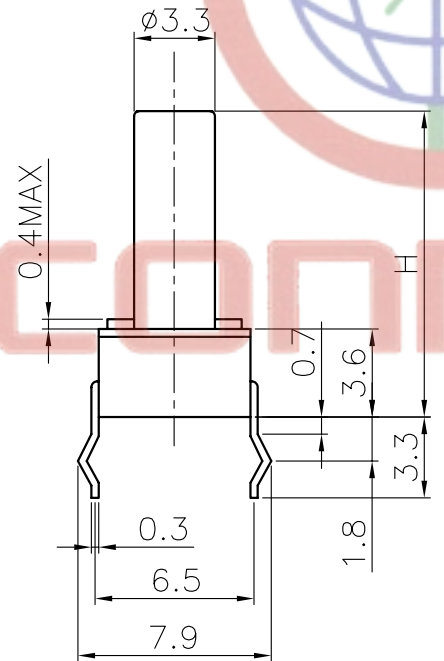

Recommend PCB layout
Tolerance \pm 0.05

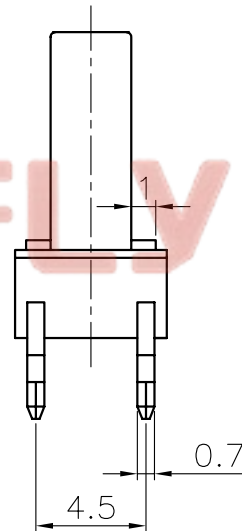

Circuit



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 11/04/06		

- . Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3Kgf Shall Be Applied In The Direction
- . Operation Temperature Range: -25°C to $+70^{\circ}\text{C}$
- . Wave Soldering: Recommended Solder Temperature At 500°F (260°C)max. 5 Seconds,Subject To pcb 1.6mm Thickness.
- . Hand Soldering: Use Soldering Iron Of 30 Watts,Controlled At 608°F (320°C)Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1109 - X X X X X



- Packing type
A: polybag
B: tube
- Actuator color
B: black
- Housing color
B: black
- Profile Height(DIM. H)
7:12.50
- Size
1: 6mm*6mm

Tel:86-574-63508187

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X. ±0.60		X. ±5°		UNITS	mm	TACT SWITCH DIP TYPE 6mmX6mm	
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1109
.XX ±0.25		.XX ±2°		<div> 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD</div>			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1109-17BBX						



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD