

VI TELEFILTER**Filter Specification****TFS 125 A****1 / 5****Measurement condition**

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedances: 50 Ω

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 125 A is the minimum attenuation in the pass band. The minimum attenuation in the pass band is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 125 MHz without tolerance or limit. The values of relative attenuation a_{rel} are guaranteed in the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

D a t a		typ. value	tolerance / limit
Insertion loss	a_e	-	1,5..... 3,5 dB
(Reference level)			
Nominal frequency	f_N	-	125,0 MHz
1 dB bandwidth	BW	-	min.300,0 kHz
Relative attenuation	a_{rel}		
$f_N \dots f_N \pm 150$ KHz		-	max. 1,0 dB
1 MHz ... $f_N - 28$ MHz		-	min. 12,0 dB
$f_N - 28$ MHz ... $f_N - 14$ MHz		-	min. 5,0 dB
$f_N + 14$ MHz ... $f_N + 28$ MHz		-	min. 15,0 dB
$f_N + 28$ MHz ... $f_N + 325$ MHz		-	min. 38,0 dB
VSWR	within ± 150 KHz	-	max. 2,0 : 1
Absolute group delay	GD	-	max.300,0 ns
Group delay ripple	GDD *)		
within ± 150 KHz		-	max. 30,0 ns
Intermodulation	**)		
IP ₃		54 dB	min. 45,0 dB
Input power level			max. 10,0 dBm
temperature coefficient of frequency	TC _f ***)	- 71.6 ppm/K	-
Operating temperature range			- 10 °C ... + 85 °C

*) measured with smoothing; smoothing aperture ≤ 50 kHz**) modulation signals: f_N and $f_N + 14$ MHz, each of 10 dBm; measured signal: $f_N - 14$ MHz***) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}) \times (\Delta T) \times f_{T0}(\text{MHz})$

generated: _____


checked / approved: _____

VI TELEFILTER**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com**


VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Construction and pin connection

(All dimensions in mm)

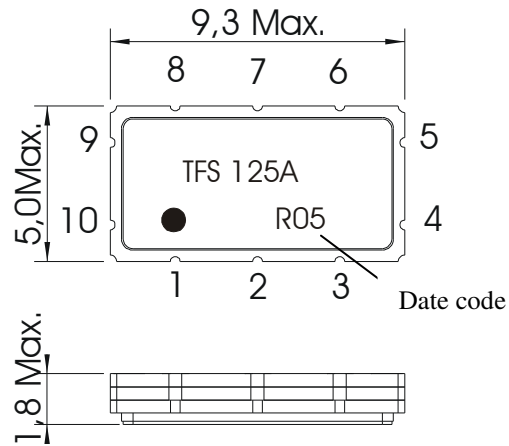

1	Ground
2	Ground
3	Ground
4	Ground
5	Output
6	Ground
7	Ground
8	Ground
9	Ground
10	Input

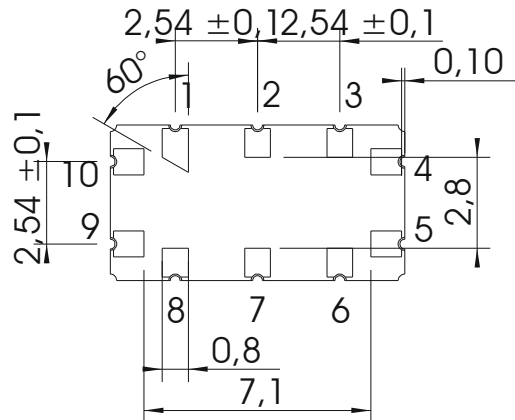

Date code: Year+week

N	2001
P	2002
R	2003
...	

VI TELEFILTER**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): max. 2 times reflow process;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;


Packing

Tape & Reel: IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;


max. pieces of filters per reel: 3000
reel of empty components at start: min 300 mm
reel of empty components at start including leader: min 500 mm
trailer: min 300 mm

Tape (all dimensions in mm)

W : 16 ± 0,3
Po : 4 ± 0,1
Do : 1,5 + 0,1
E : 1,75 ± 0,1
F : 7,5 ± 0,1
G (min) : 0,60
P2 : 2 ± 0,1
P1 : 8 ± 0,1
D1(min) : 1,5
Ao : 5,30 ± 0,1
Bo : 9,70 ± 0,1
CT : 13,5 ± 0,1

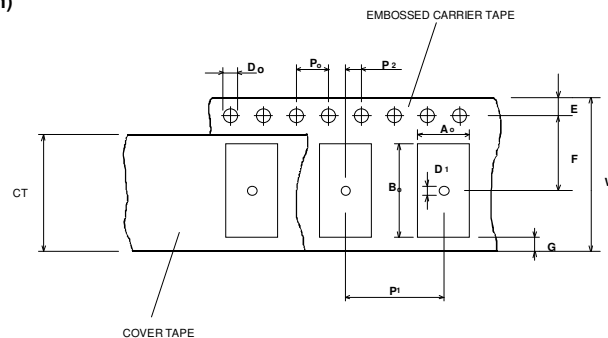**Reel (all dimensions in mm):**

A : 330
W1 : 16,40 +2,0
W2 (max) : 22,4
N (min) : 50
C : 13,0 ± 0,5/-0,2

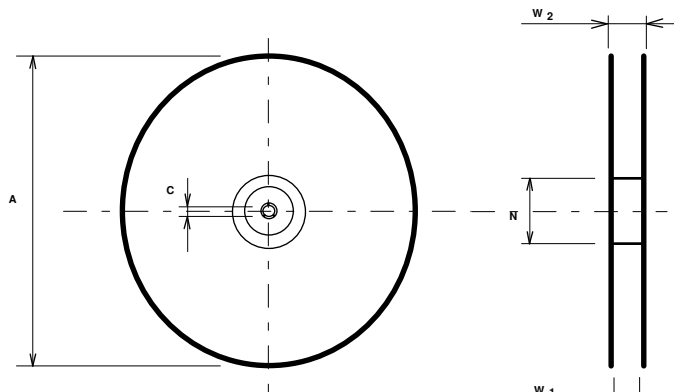

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Marking on the filter can be read if the upper side of the carrier tape is regarded with the sprocket holes on the left side of the tape.

VI TELEFILTER

Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

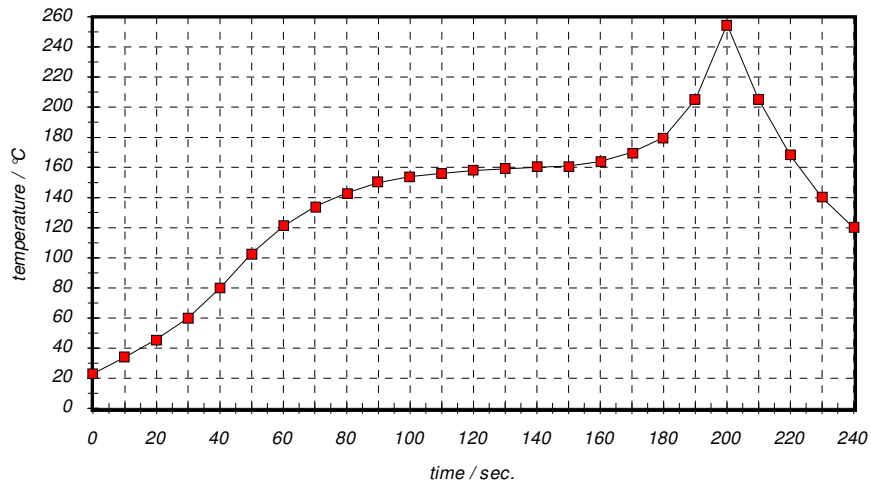
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter Specification****TFS 125 A****5 / 5**

History

Version	Reason of Changes	Name	Date
1.4	changing of relative attenuation in pass band from maximum to minimum	Dr. Sabah	24.04.2001
1.5	Change of package, pin 1 with slanted edge	Dr. S. Sabah	23.01.2002
1.6	read of the marking on the filter	Dr. S. Sabah	27.01.2003

VI TELEFILTER**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.