



A2005021529P60
HOUSING

IPEX/20453-040T-40PIN OR EQ
HOUSING

NOTE:


1. TEST CONDITION: (a). CABLE MUST TO TEST OPEN, SHORT & MISWIRE, 100% TEST.
 (b). INSULATOR RESISTANCE: DC 300V 0.01sec, 2Mohm MIN.
 (c). CONTACT RESISTANCE: 0.9ohm MAX.
 (d). HI-POT TEST: AC 300V 10mA 1sec.
2. PACKING: EACH CABLE IN A POLYBAG, WITH CLEAR TAPE FIXED.

 mm		 Unixtar Technology, Inc.
TOLERANCES UNLESS OTHERWISE SPECIFIED .X± .XXX± .XX± ANGLES		
DRAFT Grand		DESCRIPTION PANEL LINK CABLE
CHECK Mag		PART NUMBER ELTECH
APPROVAL Mag 12/09/'13		LVDS CABLE HYDIS
SCALE	REV	SHEET
	Sø	1/2

PIN OUT

A2005021529P60
HOUSING

IPEX/20453-040T-40PIN OR EQ
HOUSING

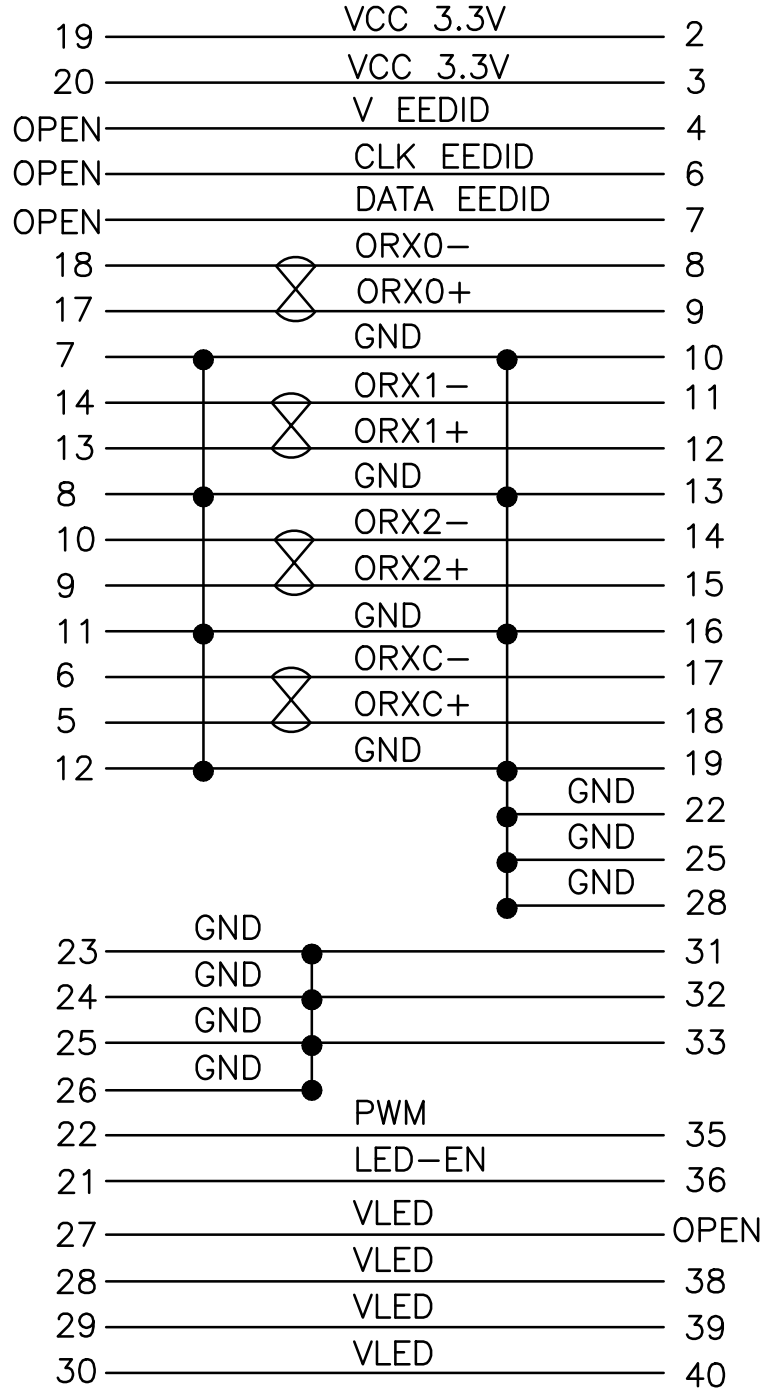

				Unixtar Technology, Inc.	
DRAFT	Grand	.X± .XXX± .XX± ANGLS		PART NUMBER ELTECH	REV. SØ
CHECK	Mag	DESCRIPTION PIN OUT	SHEET 2/2	LVDS CABLE HYDIS	SHEET 2/2
APPROVAL	Mag 12/09/'13				