



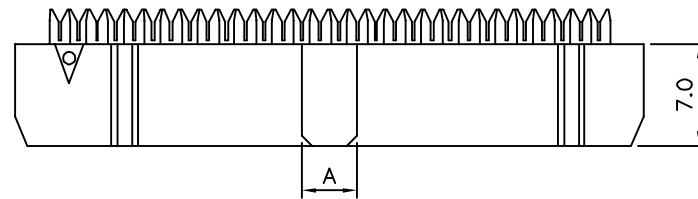




6P Single Slot



8P Single Slot

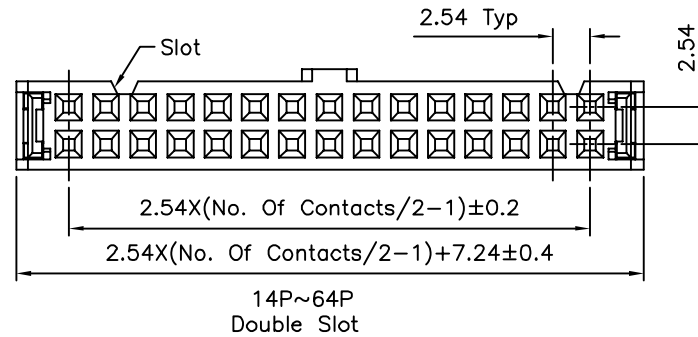

10P~12P Single Slot

SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-40°C~+105°C
 Housing:PBT+G.F.(UL94V-0)
 Contact:Brass,Selective Gold Plated Over Nickel
 RoHS Compliant

FC 30 XX T12 - XX - H
 (1) (2) (3) (4) (5) (6)

- (1) FC:2.54mm IDC Connector
- (2) 30:With S.R.
- (3) XX:No. Of Position
- (4) T12:Pin Row Pitch=1.1mm
- (5) XX:Insulator Color
Blank:Black
GE:Gray
- (6) H:RoHS Compliant

Pin	A
06~08	1.9
10~64	3.8

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No. FC30XXT12-XX-H		MEI	
DRAWING No. FC30XXT12-XX-H		CHECKED BY HZF	
SCALE		DRAWING BY SONG	
NONE	REV.	A0	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.15	X' ±3.0'
.XX ±0.08	.X' ±2.0'
.XXX ±0.5'	.XX' ±1.0'

UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	06/10/2012
		REVISIONS		