




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 04/27/05'		卢金春
B	ADD DIM	LL 09/21/06'		卢金春
C	胶芯加胶	YCH 04/09/08'		卢金春
D	整理图面	YCH 07/06/09'		

NOTES:


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1011
- PRODUCT NUMBER CODE:

DS1011- X X X X X X X


- LOCK DIM.
7: 7.90mm(standard)
4: 4.50mm(special)
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
Si: Full Gold flash
- HOUSING TYPE
B: BIG LATCH HOUSING
- MOUNTING TYPE
S: STRAIGHT
R: R/A
- No.OF CONTACTS
10 14 16 20
26 30 34 40
50 60 64
- SERIES No.
DS1011 SERIES

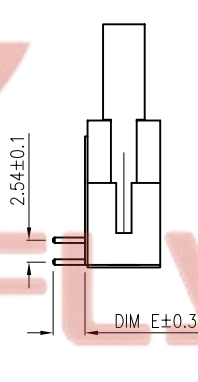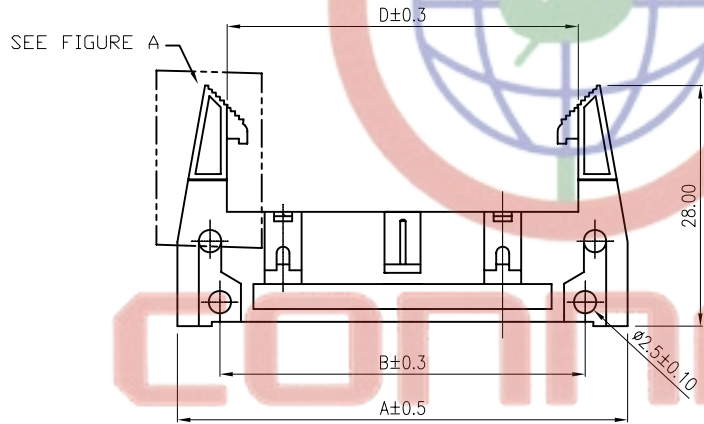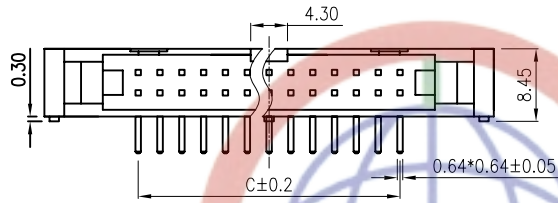

R/A TYPE

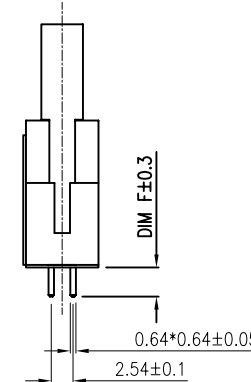

V/T TYPE

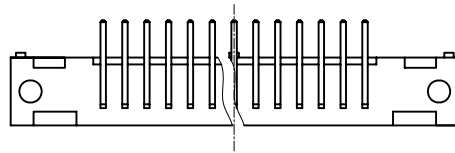

R/A TYPE


DIM.		E
Latch Type		
Stadard Latch		3.70

V/T TYPE


DIM.		F
Latch Type		
Stadard Latch		3.10
Stadard Latch		8.10

AVAILABLE DIMENSION TABLE

No.of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.1	37.18	39.72	44.80	52.42	57.50	62.58	70.20	82.90	95.60	100.68
B	22.20	27.28	29.82	34.90	42.52	47.60	52.68	60.30	73.00	85.70	90.78
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	18.10	23.18	25.72	30.47	38.42	43.50	48.58	56.20	68.90	81.60	86.68



STANDARD LATCH



SPECIAL LATCH

FIGURE A

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1011-XXBXXX-D	

PROJECTION	TITLE	SHOUED HEADER PITCH 2.54mm	
	mm		
UNITS	A4	SERIES	DS1011 SERIES



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD