


SPECIFICATION

Current Rating:1.0 Amp Max.
 Withstand Voltage:600V AC RMS
 For 60 Seconds
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operation Temperature:-55°C~+105°C
 △ Contact:Copper Alloy,Gold Plated Over Nickel
 Insulator:LCP(UL94V-0),Black
 RoHS Compliant




△ HA B D XXX - H H
 (1) (2) (3) (4) (5) (6)

- (1) HA:1.27X1.27
- (2) B:Box Header
- (3) D:DIP Straight
- (4) XXX:No. Of Position
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant

△ Pin	A	B	C
10	12.65	11.10	5.08
12	13.92	12.37	6.35
14	15.19	13.64	7.62
16	16.46	14.91	8.89
20	19.00	17.45	11.43
24	21.54	19.99	13.97
26	22.81	21.26	15.24
28	24.08	22.53	16.51
30	25.35	23.80	17.78
34	27.89	26.34	20.32
40	31.70	30.15	24.13
44	34.24	32.69	26.67
50	38.05	36.50	30.48
60	44.40	42.85	36.83
64	46.94	45.39	39.37
68	49.48	47.93	41.91
80	57.10	55.55	49.53
100	69.80	68.25	62.23

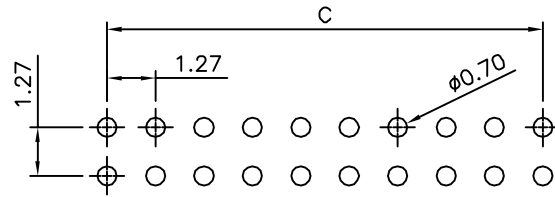

P.C.B. Layout(Top View)

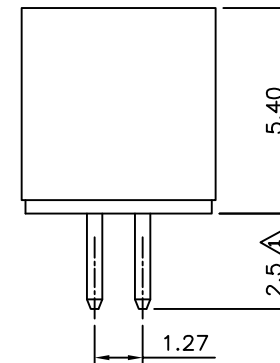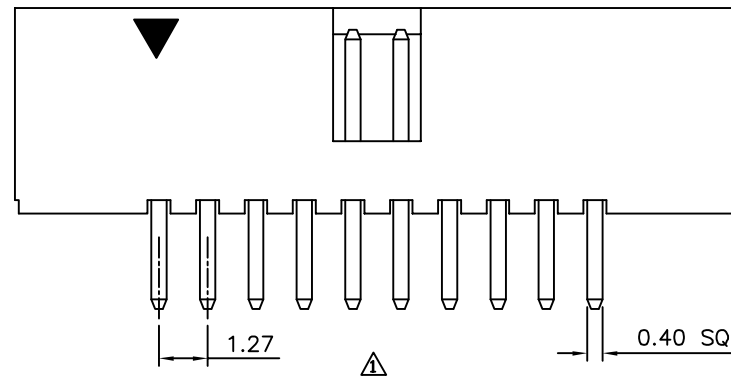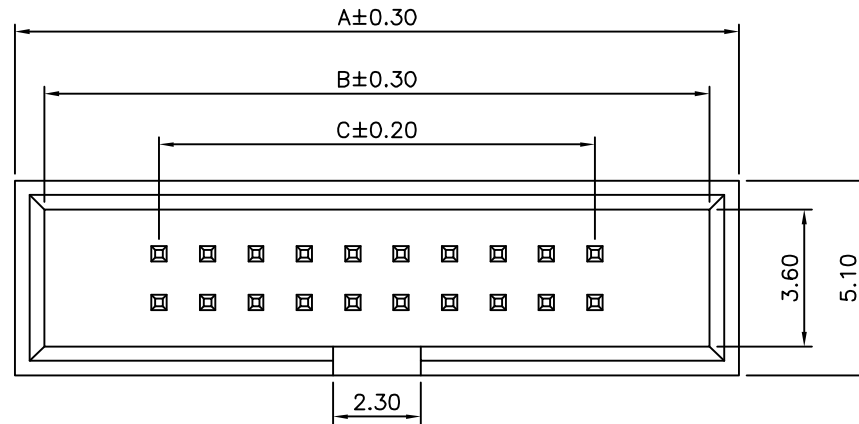

CATEGORY		APPROVED BY EMILY	
PART No. △ HABDXXX-HH		CHECKED BY HZF	
DRAWING No. HABDXXX-HH		DRAWING BY GAO	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify P/N: HABDXXX-HH → HABDXXX-HH	HZF	07/04/2012
△ A0		NEW RELEASE	HZF	06/02/2009