
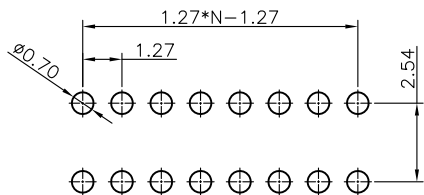
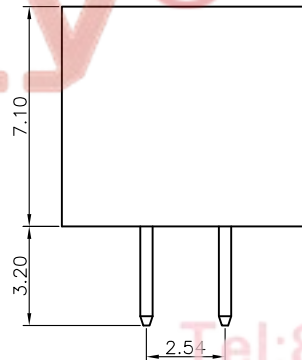
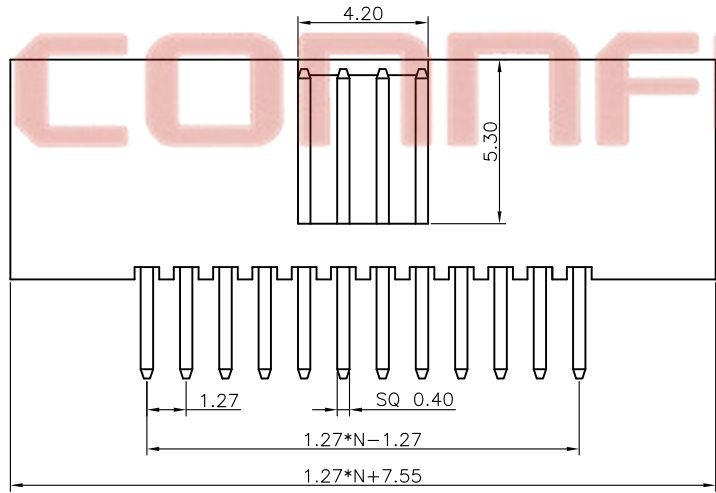


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	

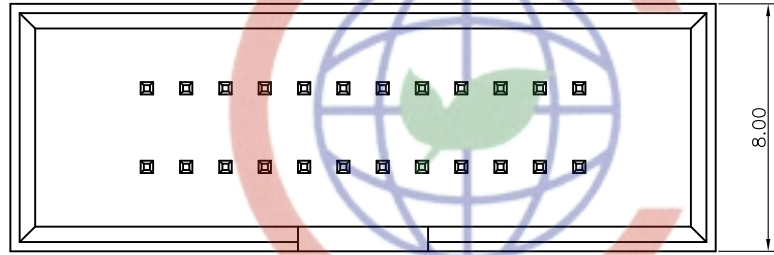

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)


NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1064-16
- PRODUCT NUMBER CODE:

DS1064-16 - X X X X X - X

- PLATING LEVEL
3A: 3A LEVEL
- PACKING TYPE
A: POLYBAG
B: TUBE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- MOUNTING TYPE
V: STRAIGHT TYPE
- No.OF CONTACTS
10 20 26 30 34
40 50 60 68 70
80 90 100

Tel:86-574-63508787
Fax:86-574-63510817
E-mail:sale@connfly.com
http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	
X.	±0.60	X.	±5°	mm	1.27*2.54mm BOX HEADER PITCH		
.X	±0.38	.X	±3°	A4	SERIES DS1064-16 SERIES		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1064-16-XXXXX-X		 晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			