


**SPECIFICATIONS**

Insulator: PBT(UL 94V-0)  
 Contact: Copper Alloy  
 Current Rating: 1 Amp DC  
 Contact Resistance: 15 Milliohms Max.  
 Dielectric Voltage: 500V AC For 1 Minute  
 Operating Temperature: -40°C To +105°C

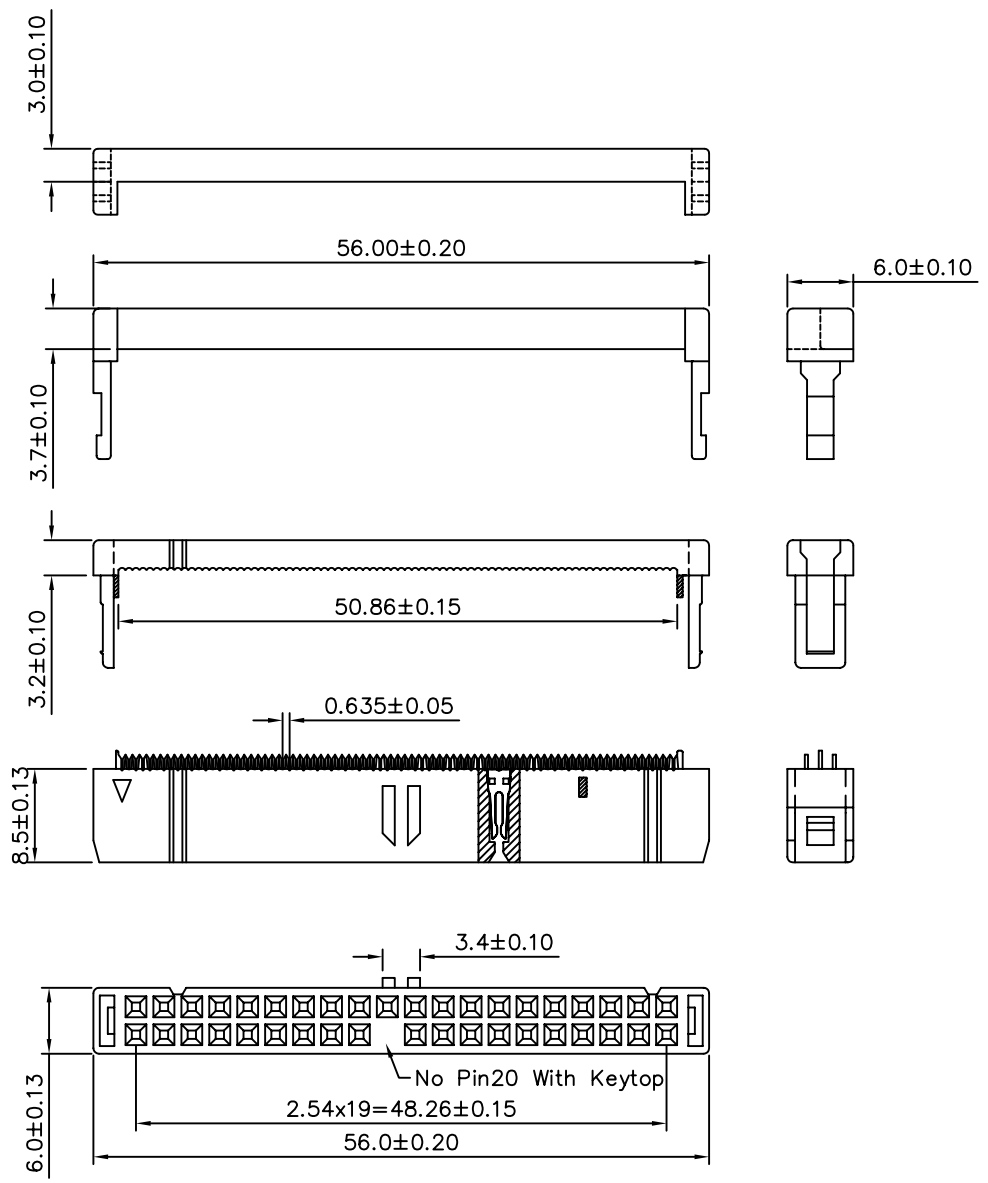

△ FCS3040EKT	Full Pin	Black
FCS3040EGT	Pull 28Pin	Gray
FCS3040EBT	Cut 34Pin	Blue

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
PART No. FCS3040EXT		MEI		
DRAWING No. FCS3040EXT		CHECKED BY BECKY		
SCALE NONE		DRAWING BY TCF		
REV.	A1	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	SHIN	11/09/2006
△ A0		NEW RELEASE	BECKY	11/30/2004