

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/10/07'	~	




NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.5 A.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO +105°C.


3. PRODUCT NUMBER CODE:

DS1025-04 - X X X X X

- CONTACTS TYPE  
S:SMT TYPE
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8:FULL GOLD FLASH
- CONNECTOR TYPE  
P:PLUG
- No.OF CONTACTS  
1\*2-1\*40
- SERIES No.  
DS1025-04

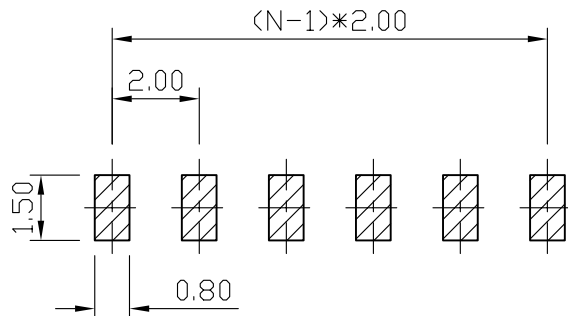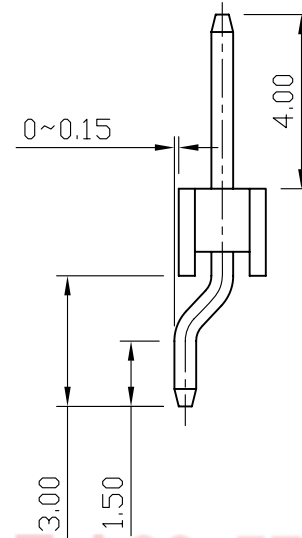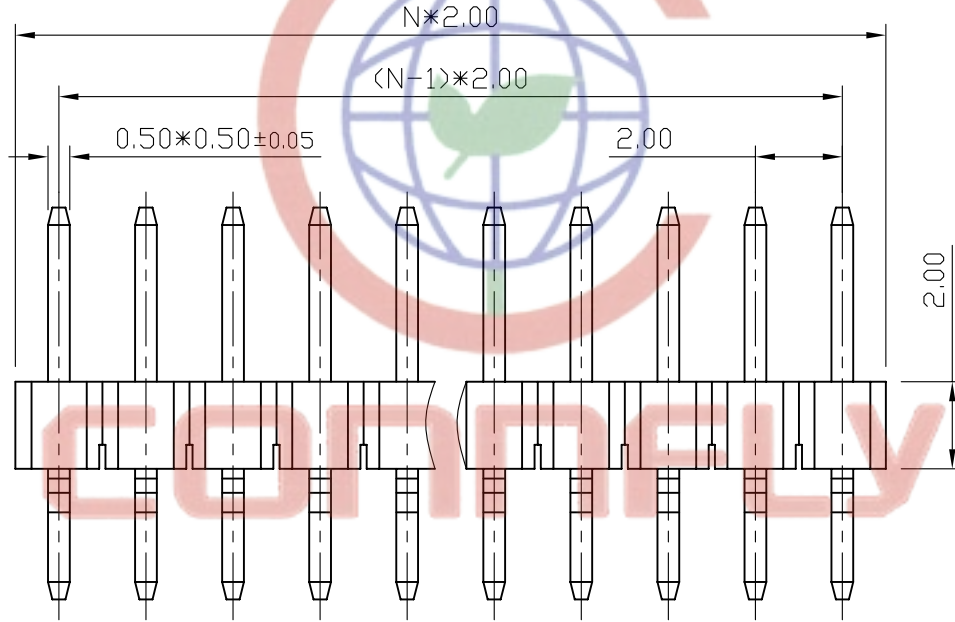

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	PIN HEADER PITCH 2.0mm SMT TYPE	
X.	±0.60	X.	±5°	UNITS		mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1025-04 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 <b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1025-04-XXXXXX					

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

Address: Industry Zone, Kang Yan

P.C:315333