


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/07/14'	~	

N:NUMBER OF CONTACT/2

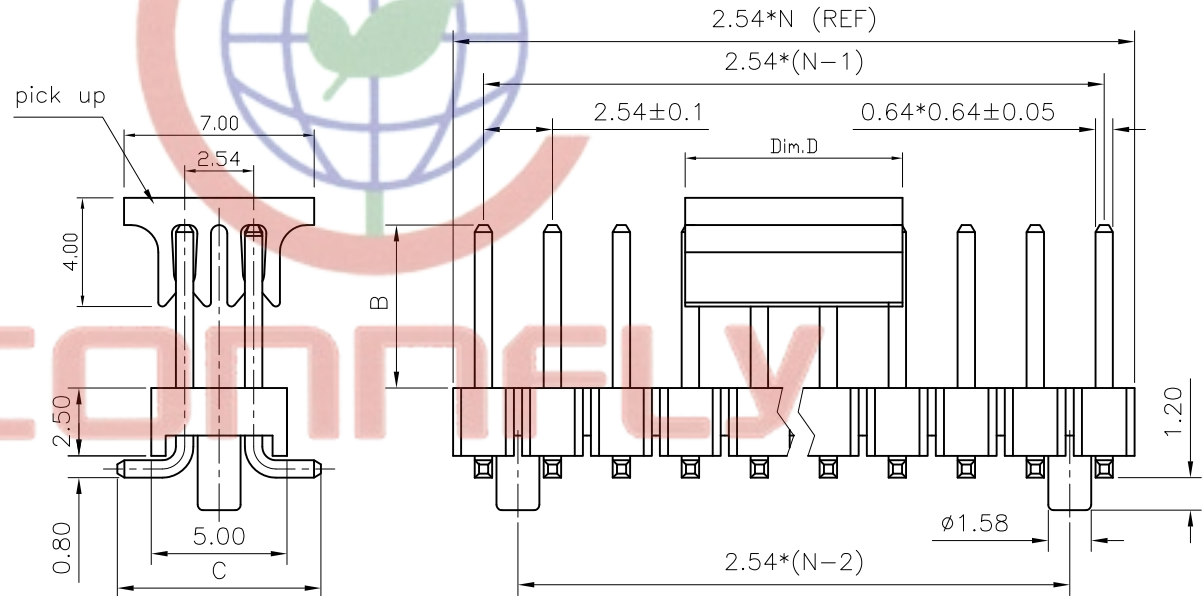

NOTES:

- SPECIFICATION
  - TEMPERATURE RANGE: -40°C~+105°C.
  - CONTACT RESISTANCE: 20mΩ max.
  - INSULATION RESISTANCE: 1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- PART NUMBER: DS1022-06
- PRODUCT NUMBER CODE:


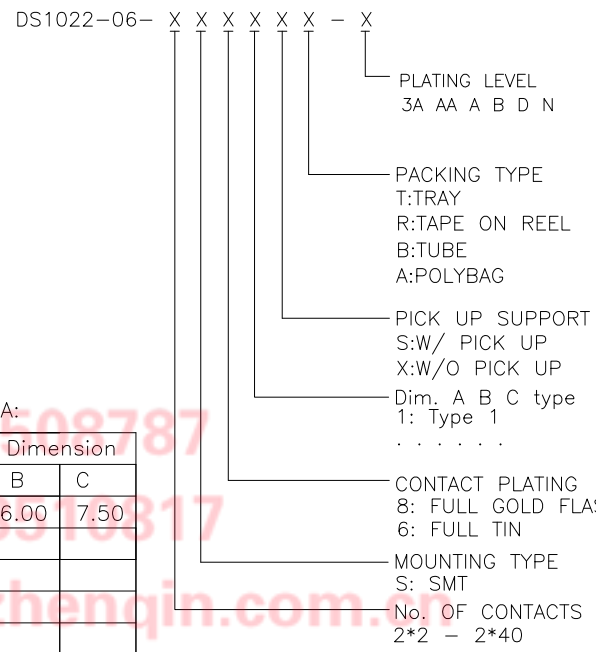


TABLE A:

TYPE	Dimension	
	B	C
1	6.00	7.50
2		
3		
4		
5		
6		
7		
8		

pos.	Dim.	Dim.D
2~8pin	5.0mm	
9~40pin	8.0mm	

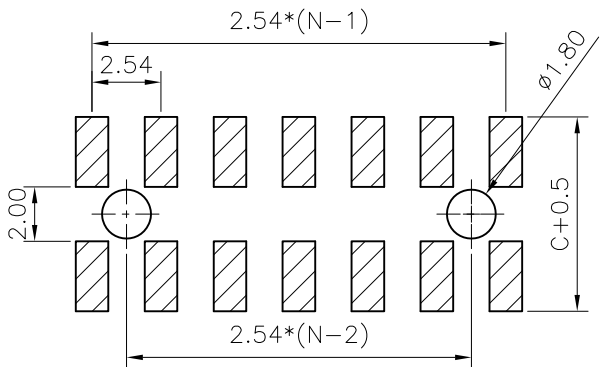

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	PIN HEADER PITCH 2.54mm	
X.	±0.60	X.	±5°	⊕		SMT TYPE W/ POST	
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°		SHEET SIZE	A4	SERIES DS1022-06 SERIES
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> <b>CONNFly CONNFly ELECTRONIC CO. LTD</b>			
SCALE		SHEET					
DRAWING NO.		1 OF 1					
		C-DS1022-06-2*XXXXXX					