


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/09/06'	~	LJC 04/09/06'
B	增加规格	YCH 01/26/08'	~	LJC 04/09/06'
C	修改图纸错误	YCH 06/01/09'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:
 

DS1023-03- X X X

  - CONTACT PLATING
    - 0: SELETIVE GOLD FLASH
    - 8: FULL GOLD FLASH
    - 2: NICKEL + GOLD FLASH
  - MOUNTING TYPE
    - V: V/T TYPE
  - No.OF CONTACTS
    - 1\*2~1\*40
    - 2\*2~2\*40
  - SERIES No. DS1023-03

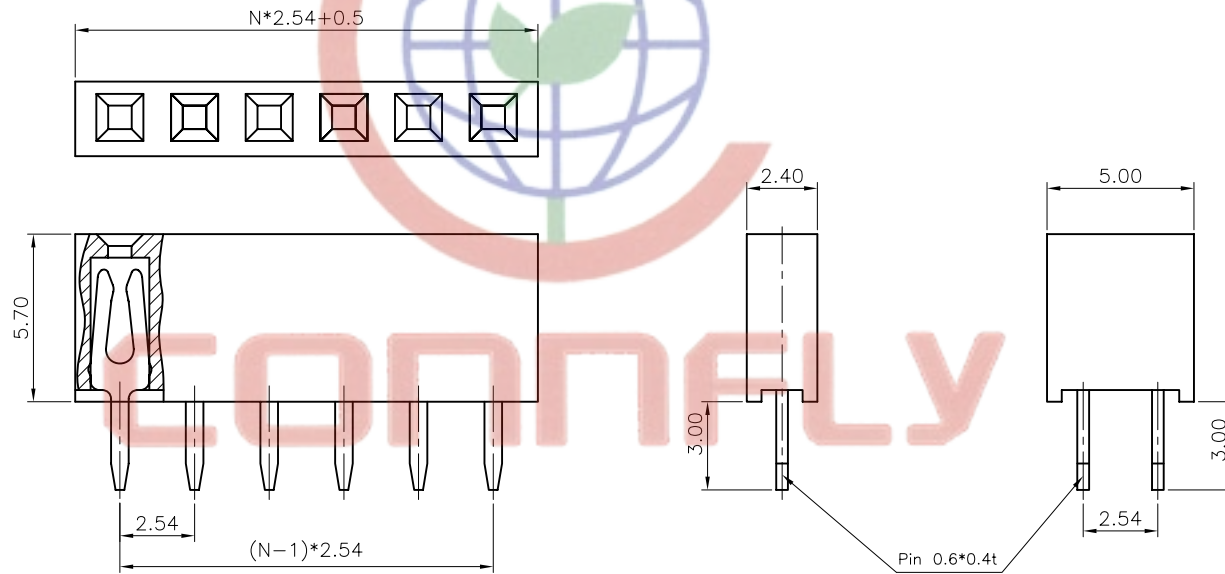

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	FEMALT HEADER PITCH	
X. ±0.60	X. ±5'	UNITS	mm		2.54mm TYPE H=5.70mm	
.X ±0.38	.X ±3'	SHEET SIZE	A4	SERIES	DS1023-03 SERIES	
.XX ±0.25	.XX ±2'	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>				
DRAWING TYPE	CUSTOMER					
SCALE	1:1					SHEET 1 OF 1
DRAWING NO.	C-DS1023-03-XXX-C					

P.C:315333