

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1.0A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 20mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS:





- . Housing: Thermoplastic(UL94 V-0)
- . Contact: Copper alloy

3. PRODUCT NUMBER CODE:


DS1065-11 - X X X X X

- PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE
- PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN

No.OF CONTACTS
2*2-2*40

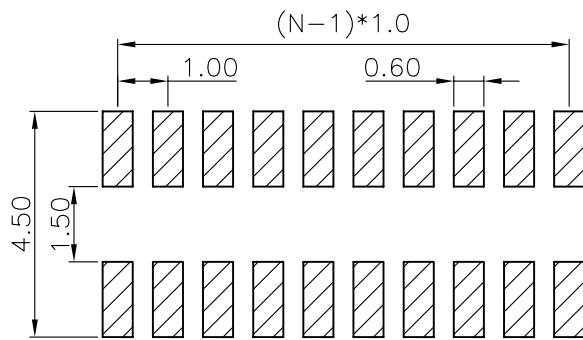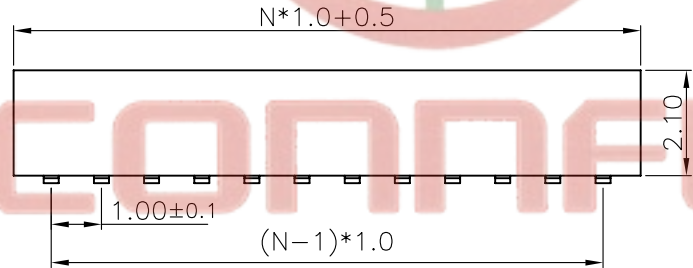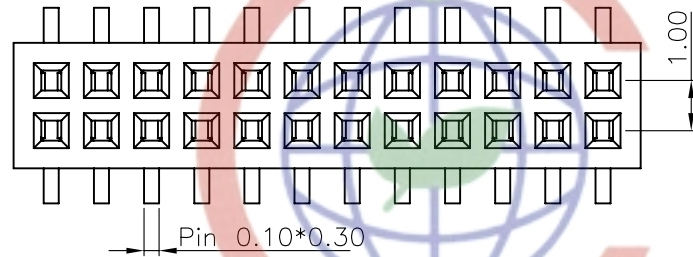

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

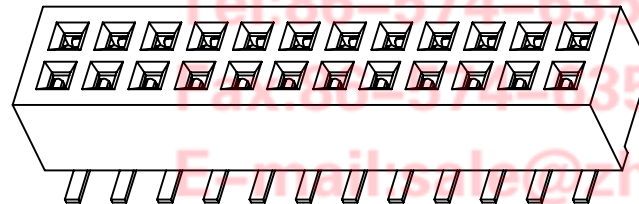

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.0mm FEMALE HEADER
X.	±0.60	X.	±5°	UNITS	mm		SMT TYPE W/O POST
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-11
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1065-11-XXXXX						