





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

NOTES:

- SPECIFICATIONS
 - Current Rating: 1.0A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 20mΩ Max
 - Operating Temperature: -40°C to +105°C
- MATERIALS:
 - Housing: Thermoplastic(UL94 V-0)
 - Contact: Copper alloy
- PRODUCT NUMBER CODE:

DS1065-12 - X X X X X

 - PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE
 - PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
 - HOUSING COLOR
B:BLACK
 - CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
0: SELECTIVE GOLD FLASH
 - No.OF CONTACTS
2*2-2*40

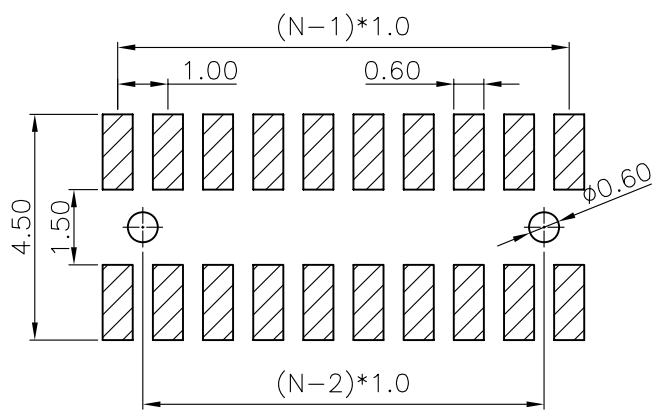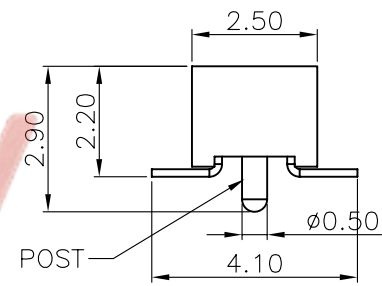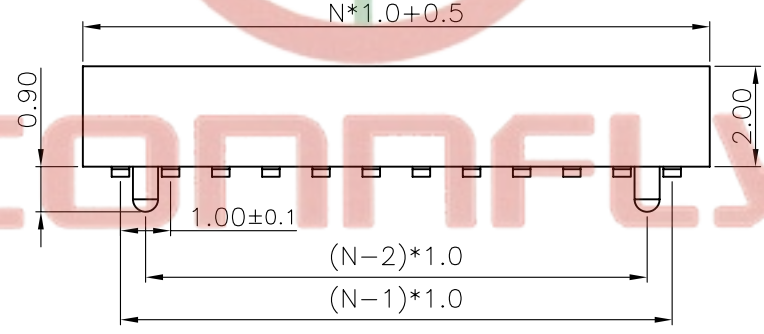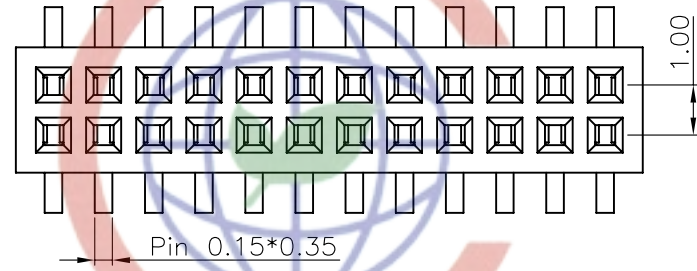

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	FEMALE HEADER PITCH 1.00mm	
X.	±0.60	X.	±5°	mm		SMT TYPE W/POST	
.X	±0.38	.X	±3°	A4	SERIES	DS1065-12	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1 SHEET 1 OF 1					
DRAWING NO.		C-DS1065-12-XXXX					

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com