

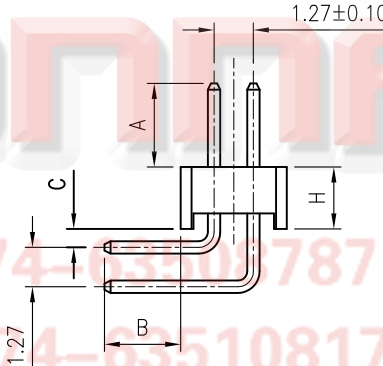
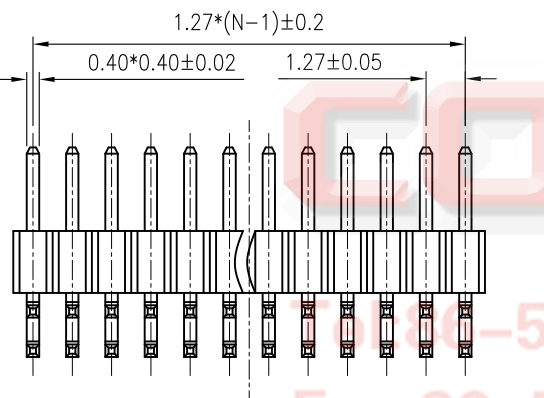


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 11/13/07'	~	

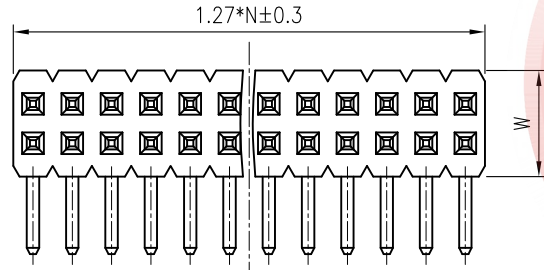

N: HALF OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1031-07
- PRODUCT NUMBER CODE:

DS1031-07 - X X X X X X X


- DIM.A,B,C TYPE
 - 1: TYPE 1
 - 2: TYPE 2
 - 3: TYPE 3
- HOUSING DIM.(DIM.H,W)
 - 1: H=1.00mm W=3.4mm
 - 2: H=1.50mm W=3.4mm
 - 3: H=1.70mm W=3.0mm
 - 4: H=2.00mm W=3.0mm
- MOUNTING TYPE
 - R: RIGHT ANGLE TYPE
- HOUSING COLOR
 - B:BLACK
- CONTACT PLATING
 - 8: FULL GOLD FLASH
- CONNECTOR TYPE
 - P:PLUG
- No.OF CONTACTS
 - 2*1-2*40
- SERIES No.
 - DS1031-07

TYPE	DIM A	DIM B	DIM C
1	2.70	2.50	1.60
2	3.80	2.00	2.50
3	2.70	2.50	1.00
4	3.00	2.80	2.40
5	1.70	2.80	2.40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1031-07-XXXXXXX		

PROJECTION	TITLE	DUAL ROW RIGHT ANGLE	
UNITS	mm	SERIES	DS1031-07 SERIES
SHEET SIZE	A4		


晨翔电子有限公司
CONNFly CONNFly ELECTRONIC CO., LTD