

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

NOTES:



- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1031-11

4. PRODUCT NUMBER CODE:


DS1031-11 - X X X X X X X

DIM.A B C TYPE
1: TYPE 1
HOUSING DIM(DIM.H,W)
1: H=1.00mm W=3.4mm
2: H=1.50mm W=3.4mm
3: H=1.70mm W=3.0mm
4: H=2.00mm W=3.0mm
MOUNTING TYPE
V:VERTICAL TYPE
HOUSING COLOR
B:BLACK
CONTACT PLATING
8: FULL GOLD FLASH
CONNECTOR TYPE
P:PLUG
No.OF CONTACTS
2*1-2*40
SERIES No.
DS1031-11

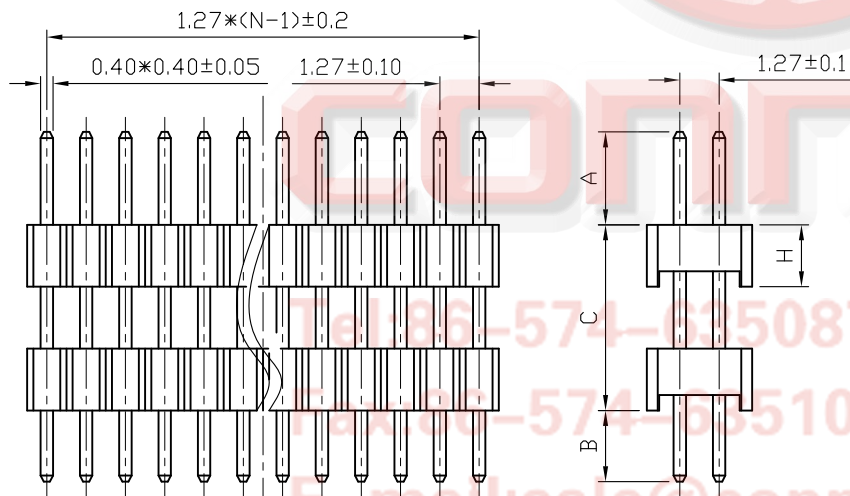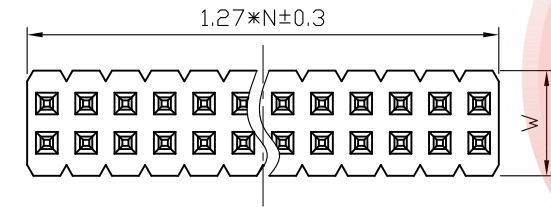

TYPE	DIM A	DIM B	DIM C
1	3.00	2.30	6.00
2	4.00	3.00	15.00
3			
4			
5			
6			
7			
8			
9			
10			
11			

N:HALF OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		DUAL ROW PIN HEADER PITCH 1.27mm
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1031-11 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE		SHEET 1 OF 1			
DRAWING NO.		C-DS1031-11-XXXXXXX			