
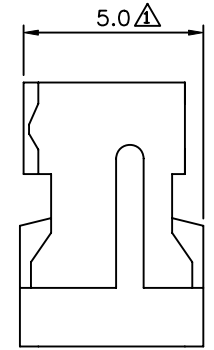
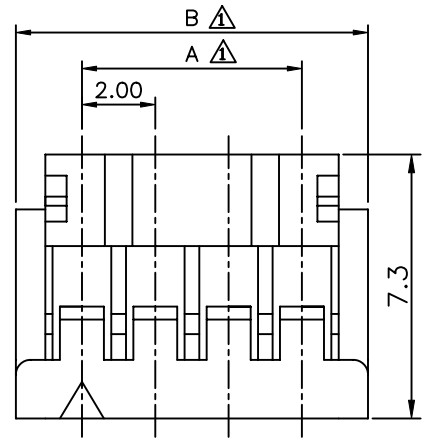


△ SPECIFICATION
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Withstand Voltage: 800V AC/Minute
 Insulation Resistance: 1000 Megaohms Min.
 Temperature Range: -25°C ~ +85°C
 Material: PA66(UL94V-2), Black
 RoHS Compliant

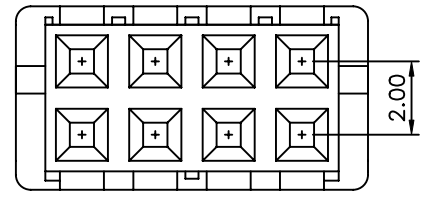

| Pin | A | B |
|-----|-------|-------|
| 4 | 2.00 | 6.00 |
| 6 | 4.00 | 8.00 |
| 8 | 6.00 | 10.00 |
| 10 | 8.00 | 12.00 |
| 12 | 10.00 | 14.00 |
| 14 | 12.00 | 16.00 |
| 16 | 14.00 | 18.00 |
| 18 | 16.00 | 20.00 |
| 20 | 18.00 | 22.00 |
| 22 | 20.00 | 24.00 |
| 24 | 22.00 | 26.00 |
| 26 | 24.00 | 28.00 |
| 28 | 26.00 | 30.00 |
| 30 | 28.00 | 32.00 |
| 32 | 30.00 | 34.00 |

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|-------------------------|------|--------------------|----|--|
| CATEGORY | | APPROVED BY MEI | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 ANG. |
| PART No. DFEXXH-H | | CHECKED BY HZF | | |
| DRAWING No. DFEXXH-H | | DRAWING BY WZL | | |
| SCALE | NONE | REV. | A1 | |
| UNIT mm | | | | |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Modify Data | HZF | 09/23/2010 |
| △ A0 | | NEW RELEASE | | |