
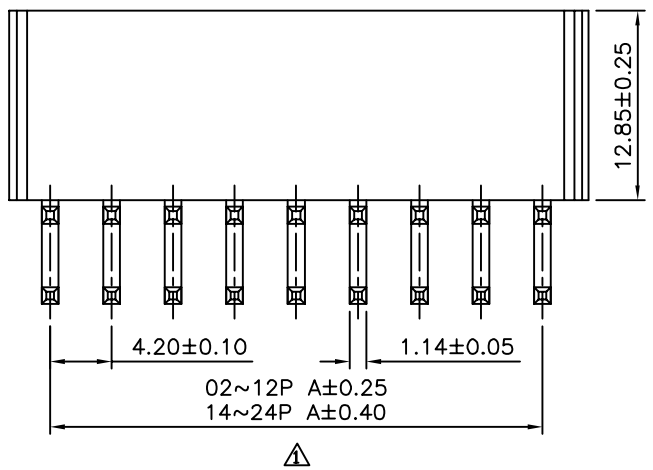
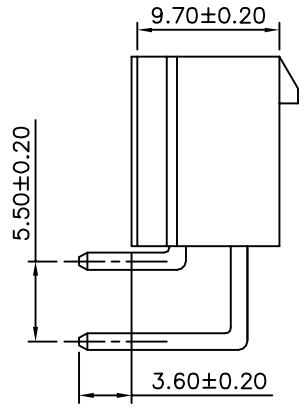


Recommended P.C.B. Layout

SPECIFICATION
 Current Rating:7A AC/DC
 Voltage Rating:600V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:10 Milliohms Max.
 Operation Temperature:-25°C~+85°C
 Insulator:PA66(UL94V-2)
 Contact:Brass,Tin Plated
 RoHS Compliant

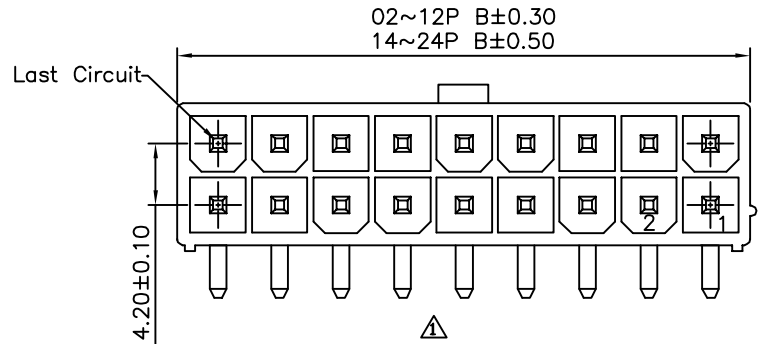

△ MF 2 X XX P RX - H
 (1) (2) (3) (4) (5) (6)


- (1) MF:4.2mm Mini-Fit
- (2) 2: Dual Row
- (3) XX: No. Of Position/Per Row
- (4) P: Male
- (5) RX: DIP Right Angle Without Mounting Ear & Post
- (6) H: RoHS Compliant

Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80


AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
PART No. MF2XXXPRX-H		CHECKED BY HZF		
DRAWING No. MF2XXXPRX-H		DRAWING BY SONG		
SCALE	NONE	REV.	A1	
UNIT mm		REV. A1		NO. REV.


NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	06/10/2014
△ A0		NEW RELEASE	HZF	05/14/2011

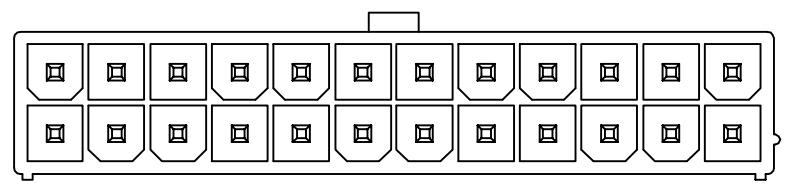


2X12P

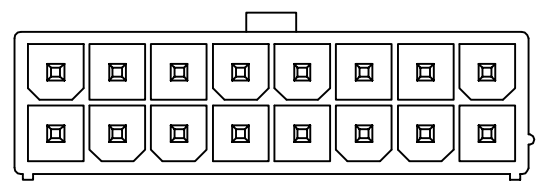


2X08P

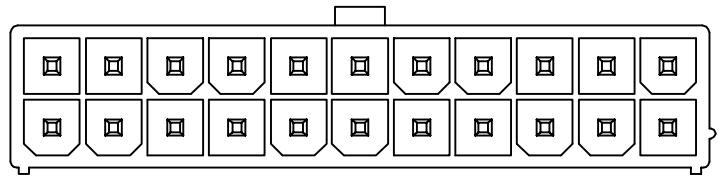


2X11P

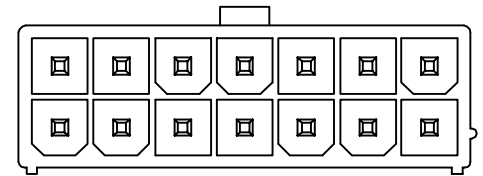


2X07P




2X04P

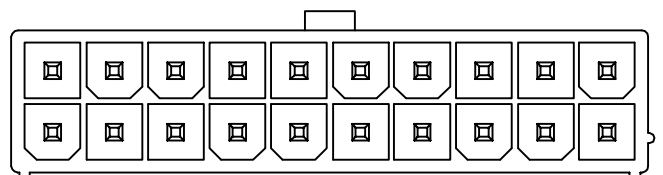


2X10P

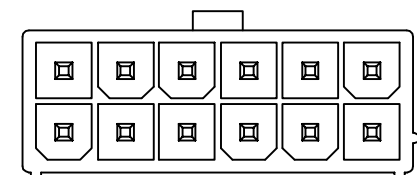


2X06P




2X03P




2X02P

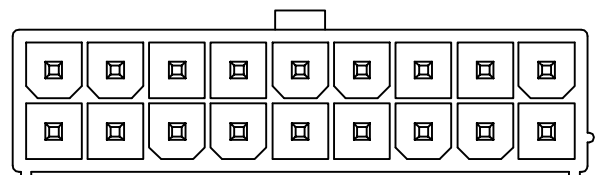

2X09P

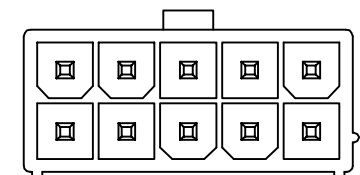

2X05P



2X01P

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No.		EMILY	
DRAWING No.		CHECKED BY	
SCALE		DRAWING BY	
NONE	REV.	SONG	
	A1		

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.015

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	06/10/2014
△A0		NEW RELEASE	HZF	05/14/2011