
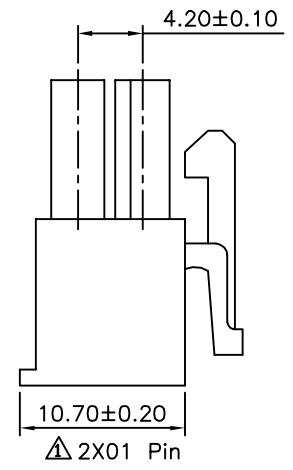
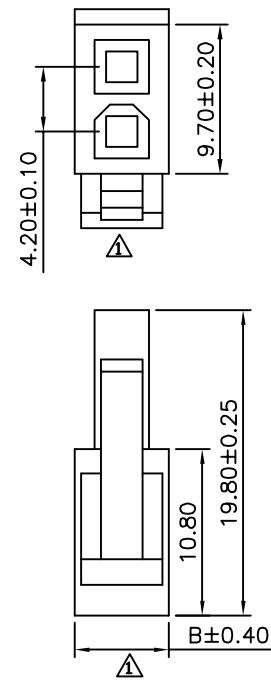
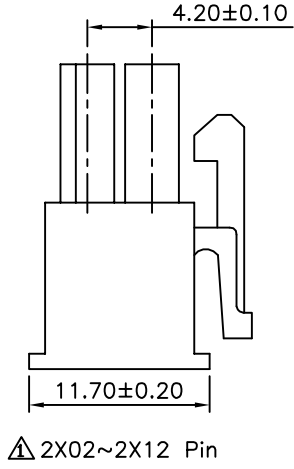
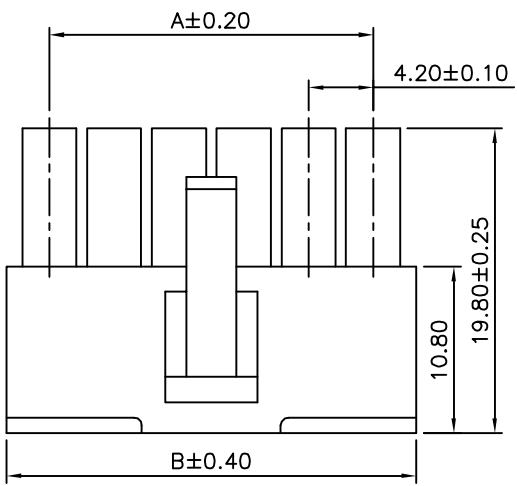


SPECIFICATION
 Current Rating:7A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66
 RoHS Compliant

- MF 2 X XX SH - XX - XX - H
 (1) (2) (3) (4) (5) (6) (7)
- (1) MF:4.2mm Mini Fit
 - (2) 2: Dual Row
 - (3) XX:No. Of Position/Per Row
 - (4) SH:Female Housing
 - (5) XX:Flame Retardant
 Blank:UL94V-2
 V0:UL94V-0
 - (6) XX:Insulator Color
 Blank:Nature
 WH:White
 - (7) H:RoHS Compliant












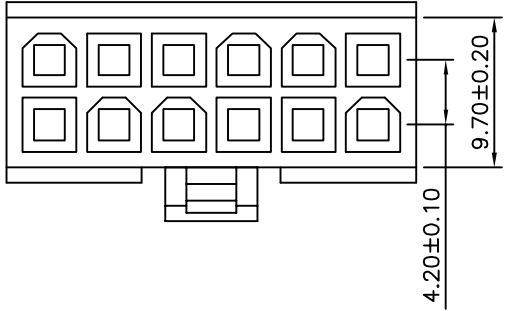


Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
PART No. MF2XXXSH-XX-XX-H		CHECKED BY HZF		
DRAWING No. MF2XXXSH-XX-XX-H		DRAWING BY GAO		
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify P/N:MF2XXXSH-H --> MF2XXXSH-XX-XX-H	HZF	06/26/2012
△A1		Modify Data	HZF	06/11/2012
△A0		NEW RELEASE	HZF	05/21/2011

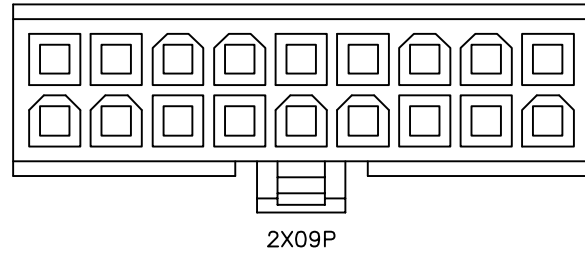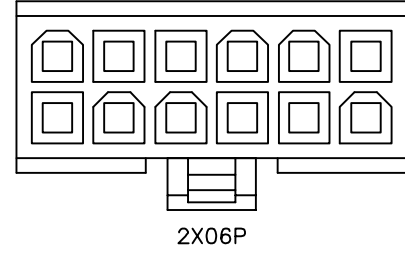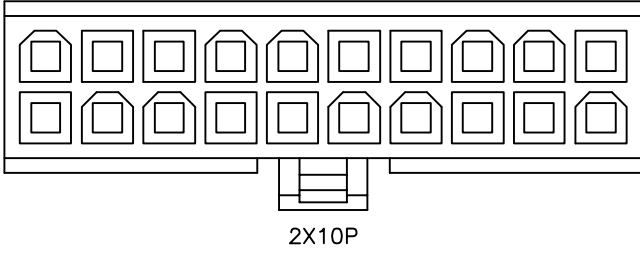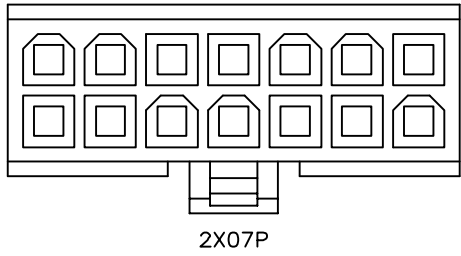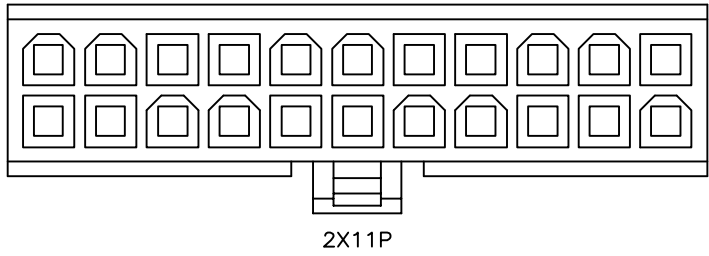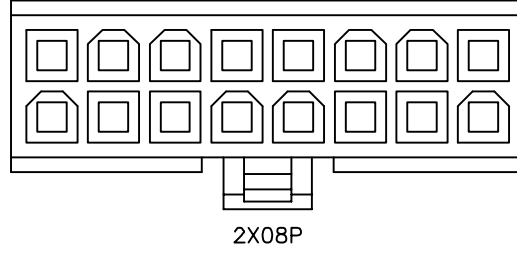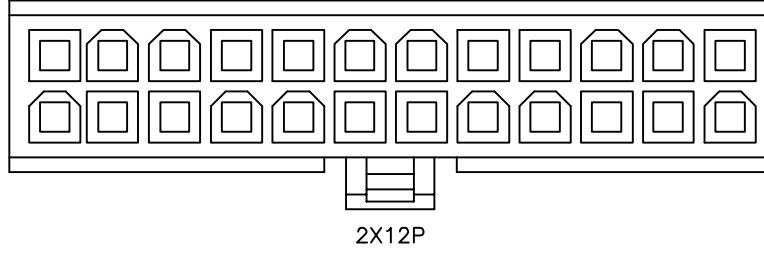

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MF2XXXSH-XX-XX-H		CHECKED BY HZF	
DRAWING No. MF2XXXSH-XX-XX-H		DRAWING BY GAO	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.015
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify P/N:MF2XXXSH-H --> MF2XXXSH-XX-XX-H	HZF	06/26/2012
△A1		Modify Data	HZF	06/11/2012
△A0		NEW RELEASE	HZF	05/21/2011