




△ Recommended P.C.B. Layout  
(PCB Board Tolerance±0.05)

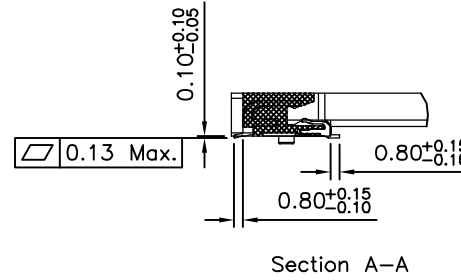

Section A-A


**SPECIFICATION**

Current Rating:0.5A AC/DC  
 Voltage Rating:50V AC/DC  
 Withstand Voltage:500V AC For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:LCP,Beige  
 △ Contact:Phosphor Bronze,Gold Flash On Contact  
 Area,Tin Plated On Solder Tails,Over Nickel  
 Latch:Phosphor Bronze  
 RoHS Compliant

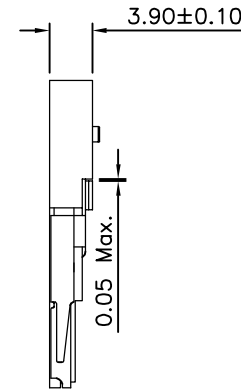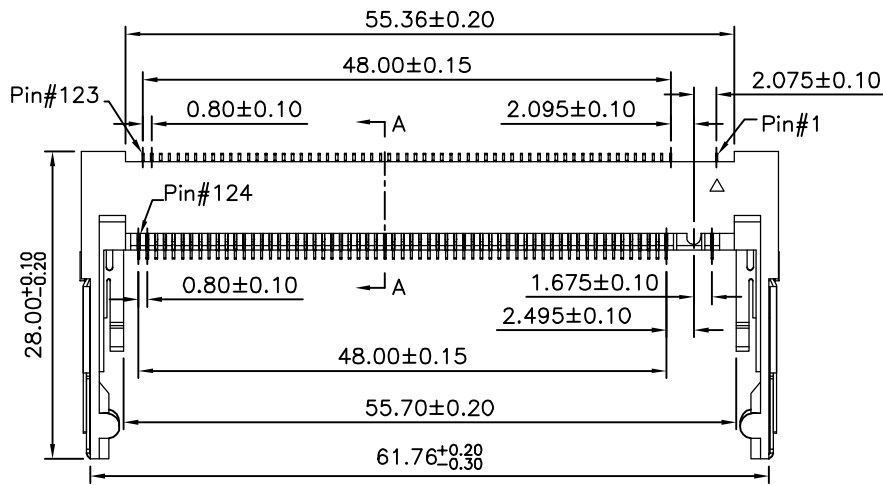

MPCI 124 W 40 - H  
 (1) (2) (3) (4) (5)

- (1) MPCI:0.8mm Mini PCI Slot
- (2) 124:No. Of Position
- (3) W:SMT Right Angle
- (4) 40:Height 4.0mm
- (5) H:RoHS Compliant

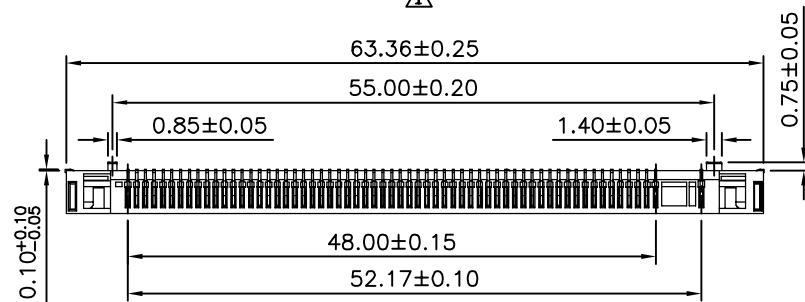

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

|                             |      |                    |    |
|-----------------------------|------|--------------------|----|
| CATEGORY                    |      | APPROVED BY<br>MEI |    |
| PART No.<br>MPCI124W40-H    |      | CHECKED BY<br>HZF  |    |
| DRAWING No.<br>MPCI124W40-H |      | DRAWING BY<br>SONG |    |
| SCALE                       | NONE | REV.               | A1 |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.05  
 .XX ±0.01  
 .XXX ±0.002

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A1 |      | Modify Data | HZF | 08/24/2012 |
| △ A0 |      | NEW RELEASE | HZF | 02/12/2011 |