
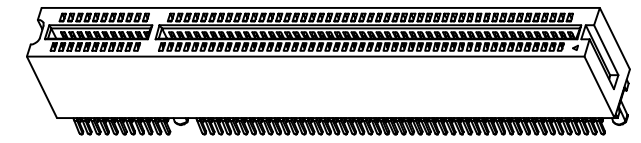

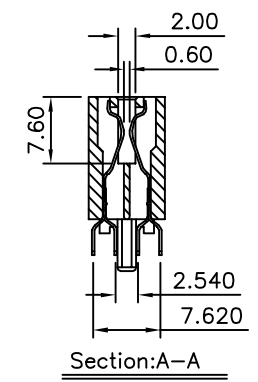

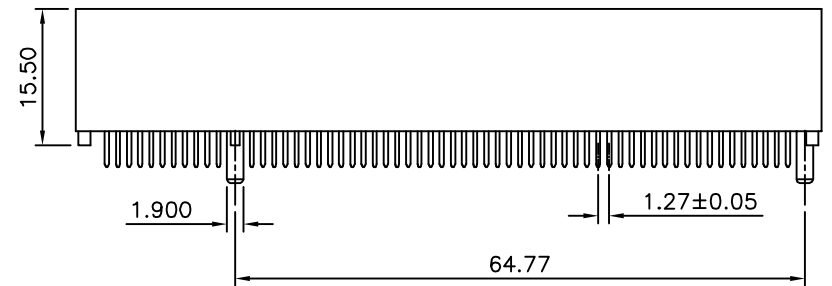


**△△ SPECIFICATION**  
 Voltage Rating:250V  
 Current Rating:1A  
 Contact Resistance Terminal:30 Milliohms Max.  
 Dielectric Withstanding Voltage:500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Housing:PA66(UL94V-0)  
 Contact:Brass  
 RoHS Compliant

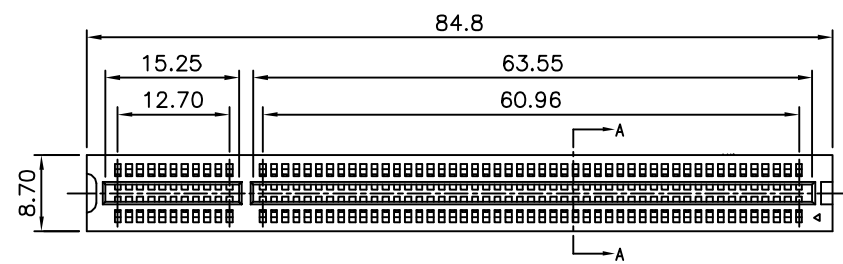

**△△ PCI 120 D - SXX - H**  
 (1) (2) (3) (4) (5)

- (1) PCI:1.27 PCI Edge Slot
- (2) 120:No. Of Position
- (3) D:DIP Straight
- (4) SXX>Contact Finish  
 Blank:Gold Flash On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel  
 S15:Gold Plated 15u" On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel  
 S30:Gold Plated 30u" On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel
- (5) H:RoHS Compliant

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

|                           |    |             |  |  |
|---------------------------|----|-------------|--|--|
| CATEGORY                  |    | APPROVED BY |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X.±0.20<br>.X±0.15<br>.XX±0.10<br>.XXX±0.05 |
| PART No. △ PCI120D-SXX-H  |    | MEI         |  |  |
| DRAWING No. PCI120D-SXX-H |    | HZF         |  |  |
| SCALE NONE                |    | SAN         |  |  |
| REV.                      | B4 | UNIT mm     |  |  |

|          |                                       |     |            |
|----------|---------------------------------------|-----|------------|
| △ B4     | Modify Data                           | HZF | 04/04/2014 |
| △ B3     | Modify Dim.                           | HZF | 04/14/2009 |
| △ B2     | Modify P/N: PCI120D-H → PCI120D-SXX-H | HZF | 04/13/2009 |
| △ B1     | Modify Specifications                 | HZF | 10/15/2008 |
| △ A0     | NEW RELEASE                           | HZF | 06/27/2007 |
| NO. REV. | REVISIONS                             | CHK | DATE       |