

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 01/06/06'		

NOTES:

1. MATERIAL:
  - 1.1 Pin(outer sleeve): Brass, machined CuZn38Pb2.
  - 1.2 Clip(contact 4finger): Beryllium Copper or phosphor bronze.
  - 1.3 Insulator(black): Glass filled thermoplastic polyester UL94V-0.

2. ELECTRICAL:
  - 2.1 Current rating: 3Amps/contact max.
  - 2.2 Contact resistance:  $\leq 20m\Omega$ /contact.
  - 2.3 Insulation resistance:  $\geq 1000M\Omega$  at  $V=100V$ .
  - 2.4 Operating voltage: 60V AC/DC.




3. PRODUCT NUMBER CODE:

DS1002-05 - X X X

CLIP PLATING  
 6: Full Tin  
 8: Full gold flash  
 C: Full gold 3u"  
 A: Full gold 10u"

PIN PLATING  
 6: Full Tin  
 8: Full gold flash  
 C: Full gold 3u"  
 A: Full gold 10u"

No.OF CONTACTS  
 1\*1 to 1\*40

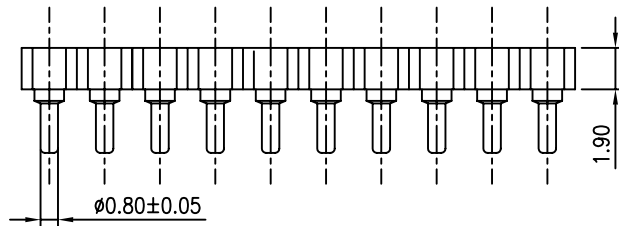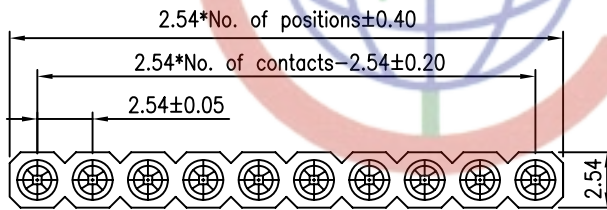

CONNFLY

TEL:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IC SOCKET PITCH 2.54mm
X.	±0.60	X.	±5°	UNITS	mm		PIN LENGTH 4.82mm
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1002-05 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1	SHEET 10F1				
DRAWING NO.		C-DS1002-05-XXXX					