


Clamp Spring - Spring type terminal blocks / WK series



WKA250A

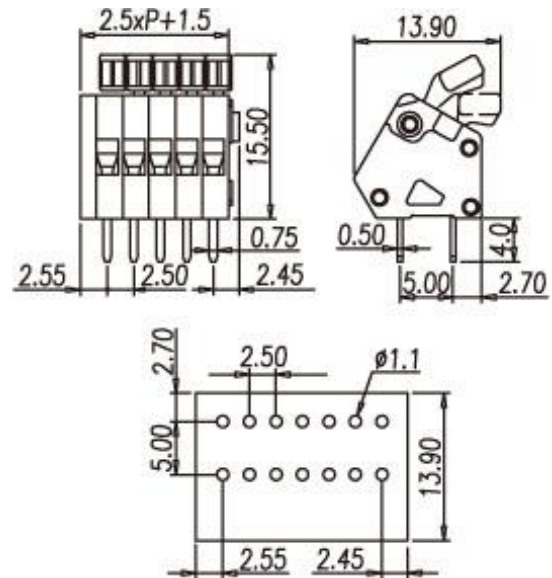

Pitch: 2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	4A	6A
Conductor cross-section, solid (AWG/ mm ²)	28~20 / 0.5	
Conductor cross-section, flexible (AWG/ mm ²)	0.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 2 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKA250A-01X	
End Cover	WKA250AC	



Optional color	Cat. No.
●	WKA250A-01X
●	WKA250A-01X-GN
●	WKA250A-01X-RD
●	WKA250A-01X-BL
●	WKA250A-01X-BK
●	WKA250A-01X-OR

Pole	Cat. No.
02	WKA250A-02P
03	WKA250A-03P
04	WKA250A-04P
05	WKA250A-05P
06	WKA250A-06P
07	WKA250A-07P
08	WKA250A-08P
09	WKA250A-09P
10	WKA250A-10P
11	WKA250A-11P
12	WKA250A-12P
:	:
:	:

Optional color	Cat. No.
●	WKA250A-XXP
●	WKA250A-XXP-GN
●	WKA250A-XXP-RD
●	WKA250A-XXP-BL
●	WKA250A-XXP-BK
●	WKA250A-XXP-OR

TEL: +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** info@dinkle.com.tw