


Front entry type terminal blocks / DT-123 series



**DT-123VA**

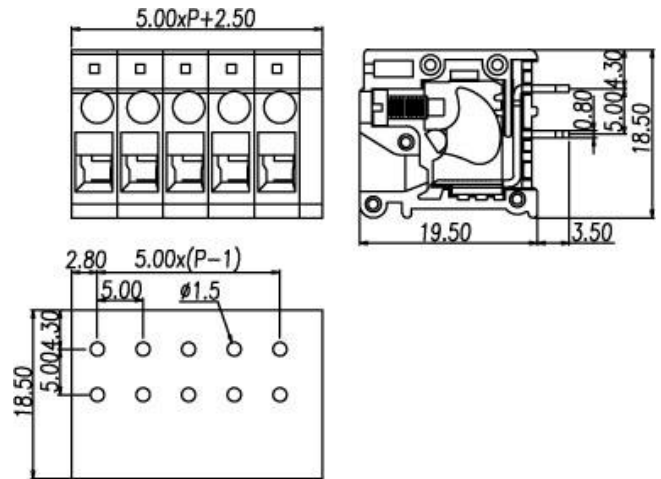

**Pitch: 5.00mm**

<b>Approval</b>		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	20A/26A	24A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	22~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)	0.5	
Screw	M2.5	
Wire strip length		
<b>Pole</b>	<b>Cat. No.</b>	
02	DT-123VA-02P	
:	:	
:	:	
24	DT-123VA-24P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw