


**P.C.B. LAYOUT(REF)**

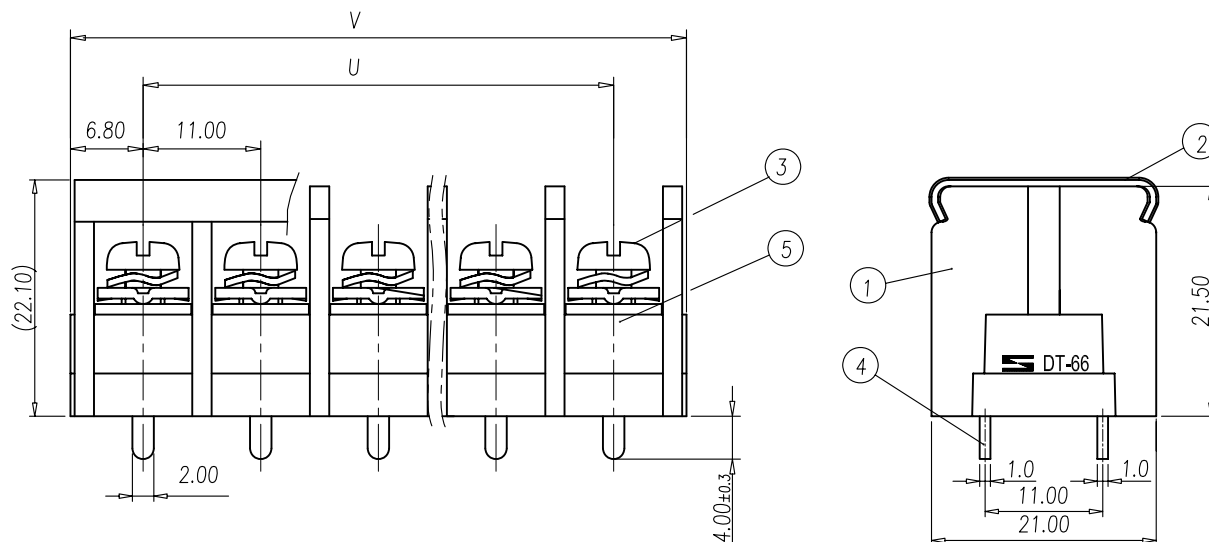

**NOTES:**

1. Rating: 600V 40A  
PITCH: 11.00 mm
2. Insulation Withstands Voltage:  
AC 2000V at 1 minute
3. Insulation Resistance:  
1000MΩ or more at DC500V
4. Using Temperature Range:  
-40°C~+130°C
5. Screw Torque Value: 1.75N·m
6. Suitable Electric Wire: AWG 18~8
7. RoHS Compliance

Normal Geometric Tolerancing				
—	//	≡	⊥	
0 to 100	0.2	0.3	0 to 10	0.2
over 100 to 150	0.3		over 10	0.3
over 150	0.5			
Total Pitch Tolerances		Normal dimension Tolerances		
0<U≤30	±0.20	0~30	±0.25	
30<U≤53	±0.25	over 30~53	±0.30	
53<U≤70	±0.30	over 53~70	±0.35	
70<U≤90	±0.35	over 70~90	±0.44	
90<U≤115	±0.44	over 90~115	±0.55	
115<U≤150	±0.55	over 115~150	±0.70	
150<U≤200	±0.70	over 150~200	±0.85	
200<U≤250	±0.85	over 200~250	±1.00	
250<U≤320	±1.00	over 250~320	±1.20	

P	2	3	4	5	6	7	8	9	10	11	12	13
U	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00
V	24.60	35.60	46.60	57.60	68.60	79.60	90.60	101.60	112.60	123.60	134.60	145.60
P	14	15	16	17	18	19	20	21	22	23	24	
U	143.00	154.00	165.00	176.00	187.00	198.00	209.00	220.00	231.00	242.00	253.00	
V	156.60	167.60	178.60	189.60	200.60	211.60	222.60	233.60	244.60	255.60	266.60	

透明蓋各P数对照表

P	1	2	3	4	5	6	7	8	9	10	11	12
L	12.80	23.80	34.80	45.80	56.80	67.80	78.80	89.80	100.80	111.80	122.80	133.80
P	13	14	15	16	17	18	19	20	21	22	23	24
L	144.80	155.80	166.80	177.80	188.80	199.80	210.80	221.80	232.80	243.80	254.80	265.80

ITEM	NAME OF PART	MATERIAL	NOTES
5	NUT	STEEL	Zn Plated
4	SOLDER PIN	COPPER ALLOY	Tin Plated
3	SCREW	STEEL	M4/Ni Plated
2	COVER	PC	透明
1	HOUSING	PBT	UL94-V0 BLACK

DWG.	ZYJ	DATE	11.08.23	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2:1 ( : )		
APP.		DATE		NAME	DT-66-C01W-XX		
				DWG NO.	SP-03-DT66C01W		

3			
REV.	CONTENT	CHK.	DATE