


Normal Geometric Tolerancing			
—	//	≡	⊥
0 to 100	0.2		0 to 10
over 100 to 150	0.3	0.3	over 10
over 150	0.5		0.3
Total Pitch Tolerances		Normal dimension Tolerances	
0<U≤30	±0.20	0~30	±0.25
30<U≤53	±0.25	over 30~53	±0.30
53<U≤70	±0.30	over 53~70	±0.35
70<U≤90	±0.35	over 70~90	±0.44
90<U≤115	±0.44	over 90~115	±0.55
115<U≤150	±0.55	over 115~150	±0.70
150<U≤200	±0.70	over 150~200	±0.85
200<U≤250	±0.85	over 200~250	±1.00
250<U≤320	±1.00	over 250~320	±1.20

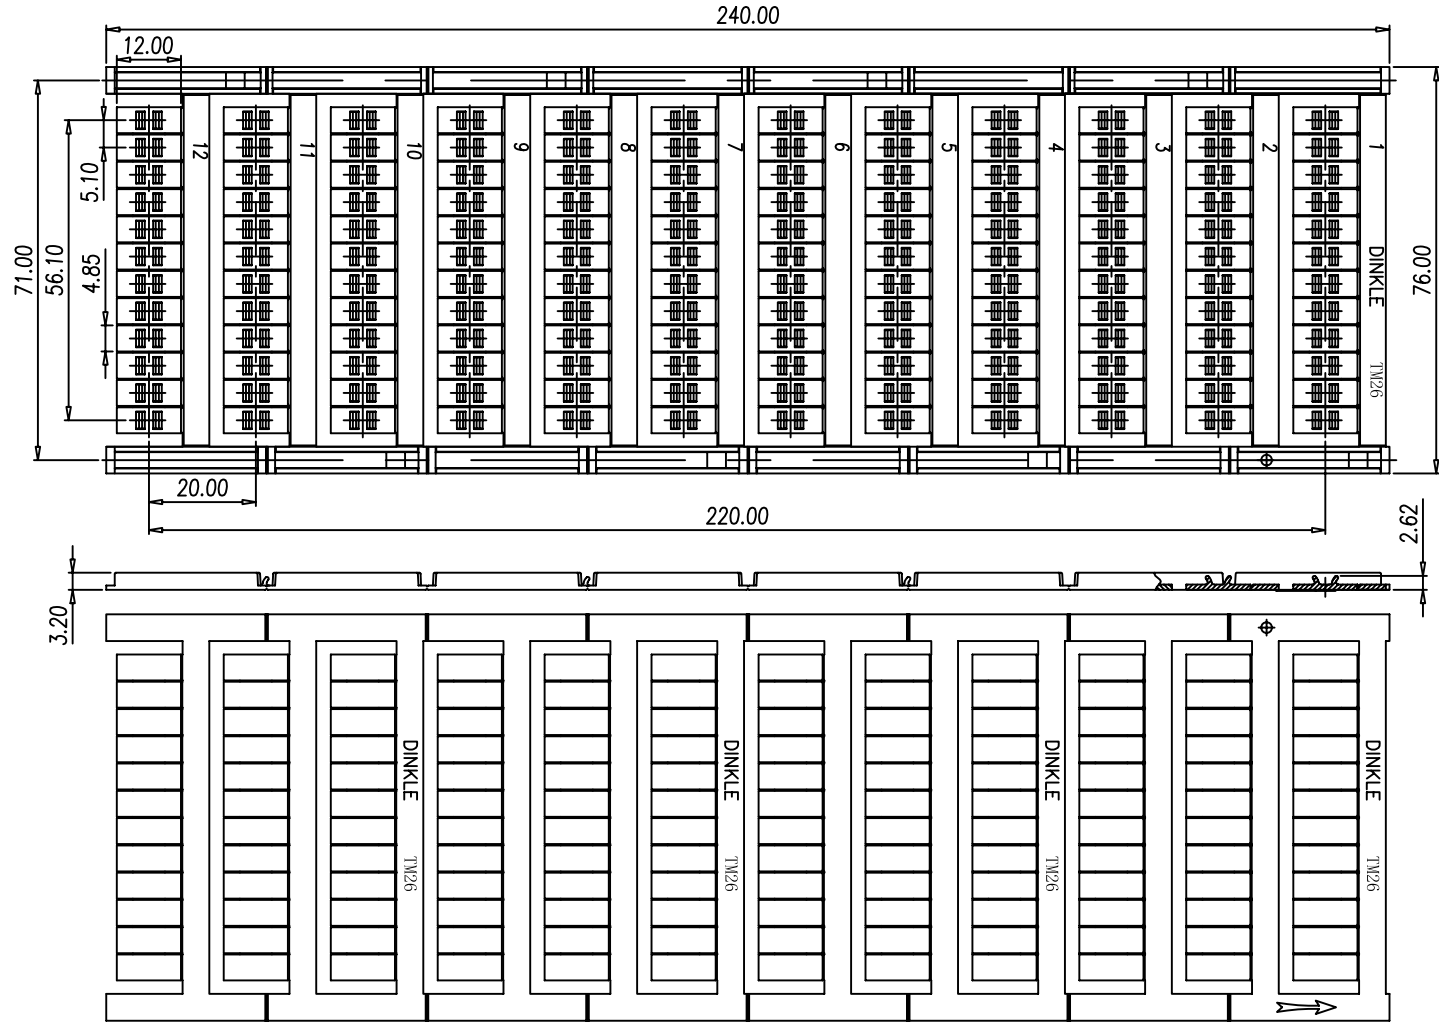

NOTES:
1. RoHS Compliance

	MARK	PA66	UL 94-V2 WHITE
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	ZYK	DATE	12.09.18	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1 (:)	⊕	
APP.		DATE					

REV.	CONTENT	CHK.	DATE	DINKLE ENTERPRISE CO.,LTD	NAME	TM26□
					DWG NO.	SP-03-TM260000