







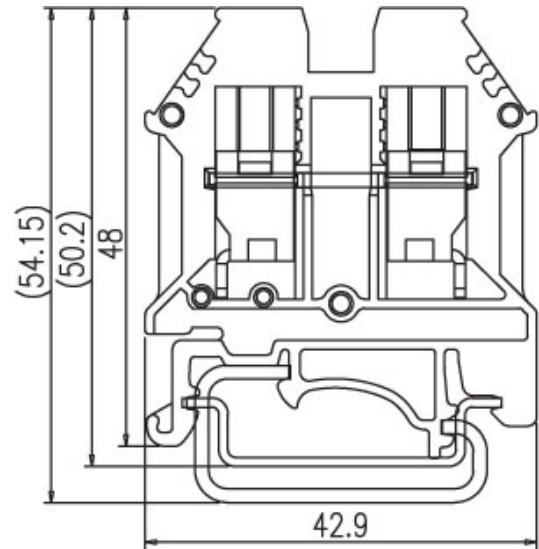

DIN Rail terminal blocks / DK..N series

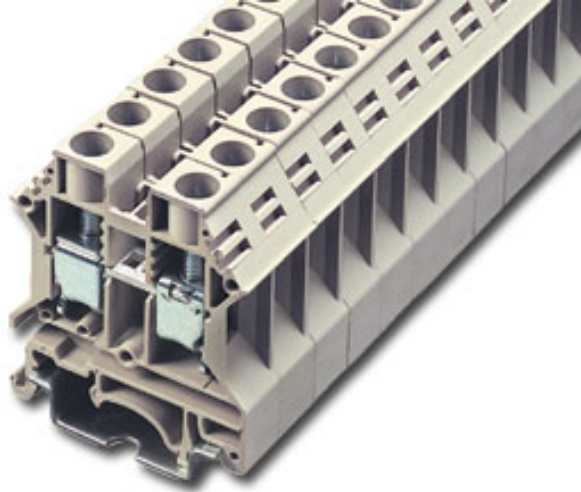

DK10N



Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	60A	57A
Conductor cross-section, solid (AWG / mm ²)	20~6 / 0.5~10	
Conductor cross-section, flexible (AWG / mm ²)	20~6 / 0.5~10	
Rated impulse withstand voltage	8KV	
Torque (N-m)	1.3	1.2
Screw	M4	
Wire strip length	12~14mm	
Insulating material	PA	
TxHxW (mm)	10 x 49.3 x 42.9	
Optional color	Cat. No.	
	DK10N-RD	
	DK10N-BL	
	DK10N-BK	
	DK10N-OR	



	Accessories	Cat. No.
End cover		DK10NC
Partition		
Small partition		DKNSPS-002
Insertion bridge	2 way	DSS10N-02P
	:	:
	:	:
Insertion bridge	10 way	DSS10N-10P
	:	:
	:	:
Insertion bridge	2 way	CSC-1002PN
	:	:
	:	:
Insertion bridge	10 way	CSC-1010PN
	:	:
	:	:
Screw-on bridge		
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		