




HONEYWELL
PART NUMBER
2455RD-73270820

ALL DIMENSIONS ARE FOR REFERENCE ONLY

DO NOT SCALE DRAWING


ALL DIMENSIONS IN mm UNLESS STATED

REV	CHANGE DOCUMENT	CHANGED BY	CHECK
1	NEW DRAWN		

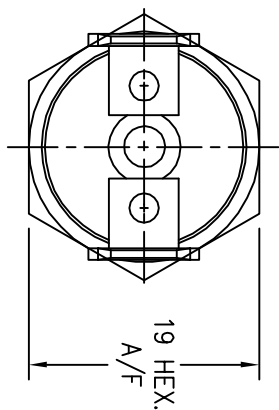

OPERATING CRITERIA	
VOLT:	12/24VDC
AMPS:	2/1A
OPERATING CRITERIA	
OPEN:	88° ± 7°C
CLOSE:	-RD-

- NOTE:
- 1.NO TERMINAL/HEX. ORIENTATION REQUIREMENT.
 - 2.seal cap
 - 3.locite 243 thread lock to the 96013201 thread after temp test
 - 4.Epoxy around the joint between the thermostat body and the brass probe.
 - 5.The recommended product installation torque is 25-30Nm
 - 6.The thread lock break away torque for the basic thermostat from the brass probe is 2+/-0.5Nm.

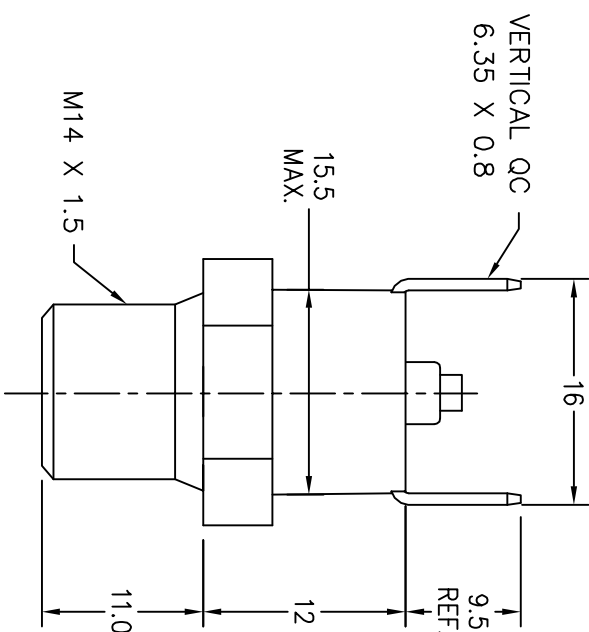

CAP:	MAT'L:
BRK'T: B327	MAT'L: BRASS
	PLATING:
TERMINAL:	T147
MATERIAL:	BRASS
PLATING:	-

CODING REQUIREMENTS	
COLOUR:	
L88C-7327-820-XXX	
(XXX = DATE CODING)	

A

DESIGN UNITS: MM
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.76
TWO PLACE	.XX	±	0.15
THREE PLACE	.XXX	±	0.050
FOUR PLACE	.XXXX	±	-
ANGLES	X	±	1

THIRD ANGLE PROJECTION



DRAWN	CXL	13JUL09
CHECK	LS	13JUL09

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

TITLE

2455RD-73270820 THERMOSTAT ASSY.

SIZE TYPE DRAWING NAME

A4 I 090022

REV

1

AUTOCAD

2D SCALE

NTS

SHEET

1 OF 1

