

VI TELEFILTER**Filter Specification****TFS 171A****1/5****1. Measurement condition :**

Ambient temperature T_A : 23 °C
 Input power level: 0 dBm
 Terminating impedances in f_C *) : for input: 960 Ω | -8,3. pF.
 for output: 1,17 K Ω | -7,5. pF.

2. Characteristics :

Remark: Reference level for the relative attenuation a_{rel} of the **TFS 171A** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The nominal frequency f_N is fixed to **171,20 MHz**. The centre frequency f_C is the arithmetic mean value of the upper and lower frequencies at the **20 dB** filter attenuation level relative to the insertion loss a_e . All specified parameters have to be reached in the operating temperature range.

Data	typ. value	tolerance / limit
Insertion loss at ambient temperature :	5,5 dB	9,5 dB
Nominal frequency f_N	-	171,2 MHz
Centre frequency at ambient temperature f_C	171,22 MHz	171,2 $\pm$ 0,1 MHz
Bandwidth		
1 dB - band width	870 kHz	min. 400 kHz
3 dB - band width	1350 kHz	min. 900 kHz
20 dB - band width	2680 KHz	max. 3300 kHz
Relative attenuation a_{rel}		
f_N $f_N \pm 0,2$ MHz	-	max. 1 dB
$f_N \pm 0,2$ MHz $f_N \pm 0,45$ MHz	-	max. 3 dB
$f_N \pm 1,65$ MHz $f_N \pm 5$ MHz	33 dB	min. 20 dB
$f_N \pm 5$ MHz $f_N \pm 40$ MHz	46 dB	min. 35 dB
$f_N \pm 40$ MHz $f_N \pm 100$ MHz	55 dB	min. 45 dB
Group delay (mean value) $f_N \pm 200$ kHz	740 ns	max. 1 μ s
Group delay ripple in $f_N \pm 200$ kHz (p-p)	50 ns	max. 400 ns
Phase ripple in $f_N \pm 200$ kHz (p-p)	4 °	
Input power level	-	max. 10 dBm
Frequency inversion temperature (T_o) :	20..25 °C	
Temperature coefficient of frequency (T_c) :	- 0,036 ppm/K ²	
Frequency deviation of f_C over temperature: **)	$\Delta f_C(\text{Hz}) = T_c(\text{ppm/K}) \times (T - T_o)^2 \times f_o (\text{MHz})$	
Operating temperature range (OTR) :	- 40 °C ... + 85 °C	

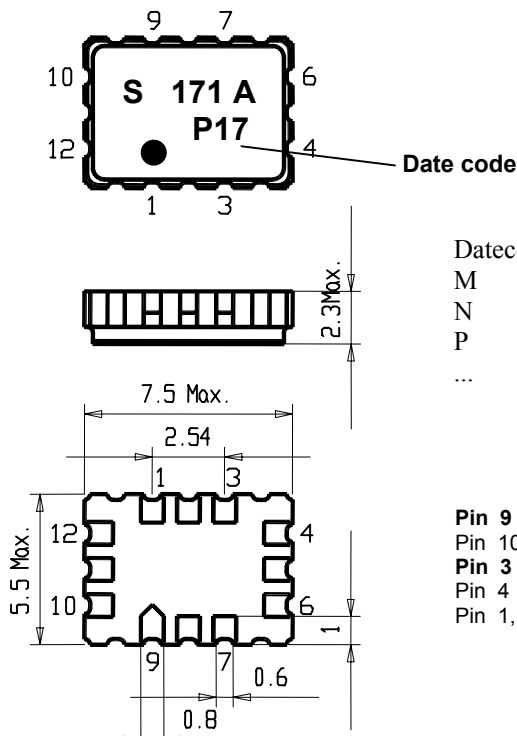
*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

Generated:**Checked/Approved:**

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

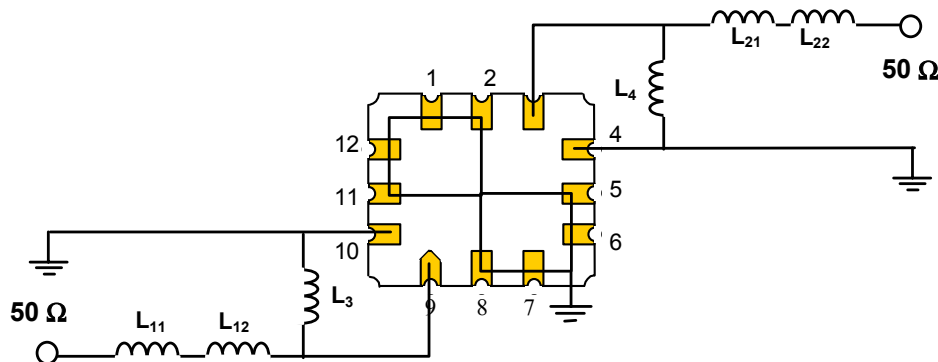
Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

3. Construction and pin connection : (All dimensions in mm)

Datecode:	Year+week
M	2000
N	2001
P	2002
...	

Pin 9 Input.
 Pin 10 Input RF Return.
Pin 3 Output.
 Pin 4 Output RF Return.
 Pin 1, 2, 5 - 8, 11, 12 - Package Ground.

4. 50 Ω matching network

5. Stability characteristics :

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to older heat (reflow): reflow possible: twice max.;for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page 4

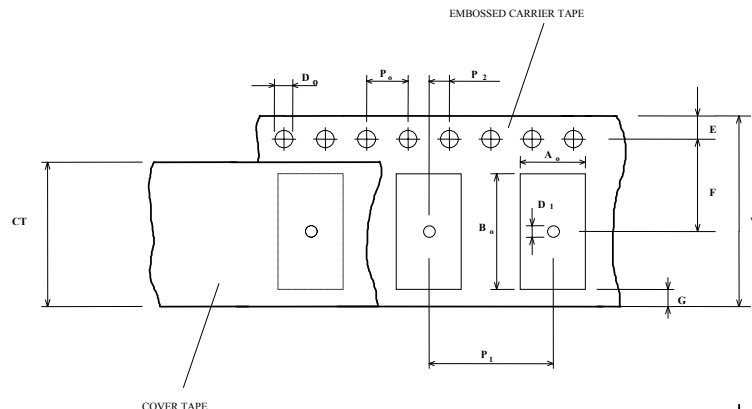
6. Packing :

Tape & Reel: DIN IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

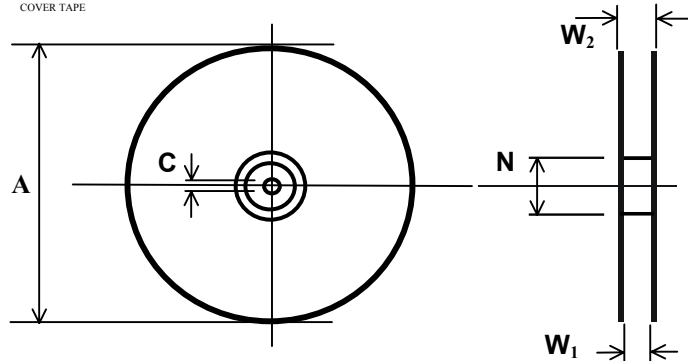
max. pieces of filters per reel:	3000
reel of empty components at start:	min 300 mm
reel of empty components at start including leader:	min 500 mm
Trailer	min 300 mm

Tape (all dimensions in mm)

W	:	16± 0,3
Po	:	4 ± 0,1
Do	:	1,5 + 0,1
E	:	1,75 ± 0,1
F	:	7,5 ± 0,1
G (min)	:	0,6
P2	:	2 ± 0,1
P1	:	8 ± 0,1
D1(min)	:	1,5
Ao	:	5,5 ± 0,2
Bo	:	7,5 ± 0,2
Ct	:	13,5 ± 0,1

**Reel (all dimensions in mm):**

A	:	330
W1	:	16,4 + 2
W2(max)	:	22,4
N(min)	:	50
C	:	13,00 +0,50 / -0,20



The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Markings on the filters can be read if the upper side of the carrier tape is regarded with the sprocket holes on its right.

7. Air reflow temperature conditions :

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

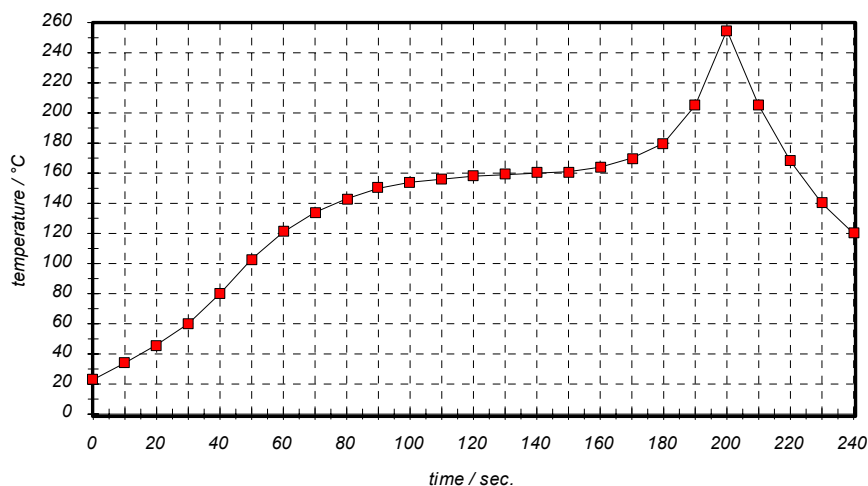
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter Specification****TFS 171A****5/5****8. History :**

Version	Reason of Changes	Name	Date
1.0	Generation of preliminary specification according to customer requirements.	Dunzow W.	18.09.2001
1.1	Change package according to customer requirements.	Dunzow W.	30.10.2001
1.2	Change pin connection according to customer requirements.	Dunzow W.	08.11.2001
1.3	Correct error in unbalanced scheme 1. Remove balanced scheme 2.	Dunzow W.	11.12.2001
1.4	Add of typical values and change to filter specification	Dr. Sabah	26.04.2002