

VI TELEFILTER**Filter specification****TFS 175 D****1/5****Measurement condition**

Ambient temperature: 23 °C

Input power level: 0 dBm

Terminating impedances at f_c *: input: 570 Ω // -5,4 pF
output: 500 Ω // -6,4 pF**Characteristics****Remark:**

Reference level for the relative attenuation a_{rel} of the TFS 175 D is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed at 175,400 MHz without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below even if the centre frequency f_c is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

D a t a		typ. Value		Limit	
Insertion loss (Reference level)	a_e	6	dB	max. 8	dB
Nominal frequency	f_N	-		175,4	MHz
Centre frequency	f_c	175,4	MHz		
1 dB Passband	PB	770	kHz	$f_N \pm 250$	kHz
Relative Attenuation	a_{rel}				
f_N ... $f_N \pm 0,25$ MHz		0,5	dB	max. 1	dB
$f_N \pm 5,0$ MHz ... $f_N \pm 10,0$ MHz		50	dB	min. 30	dB
$f_N \pm 10,0$ MHz ... $f_N \pm 75,0$ MHz		60	dB	min. 55	dB
$f_N + 75,0$ MHz ... $f_N + 1,0$ GHz		60	dB	min. 50	dB
$f_N - 174,4$ MHz ... $f_N - 75,0$ MHz		70	dB	min. 50	dB
Group delay at f_N		800	ns	max. 850	ns
Group delay variation in $f_N \pm 100$ kHz		20		ns max.	50 ns
Time domain response **					
5 μ s		-62	dBc	min -30	dBc
10 μ s		-85	dBc	min -50	dBc
15 μ s		-85	dBc	min -70	dBc
20 μ s		-85	dBc	min -80	dBc
40 μ s		-95	dBc	min -90	dBc
Input Power Level		-		max. 20	dBm***)
Voltage between any two terminals		-		max. 30	V
Temperature coefficient of frequency TC_f		- 0,036	ppm/K ²	-	
Frequency inversion temperature T_0		+ 35	°C	-	
Operating temperature range		-		-10 °C .. + 85	°C
Storage temperature range		-		- 40 °C .. + 125	°C
Out of band intermodulation results input signals at 176 and 176,6 MHz at 4 dBm		62	dBm	max. -56	dBm

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) Values are relative to the centre of the main response lobe

***) This power level is only allowed for short term operation, the max. input power for continuous operation is only max. 15 dBm

generated: _____

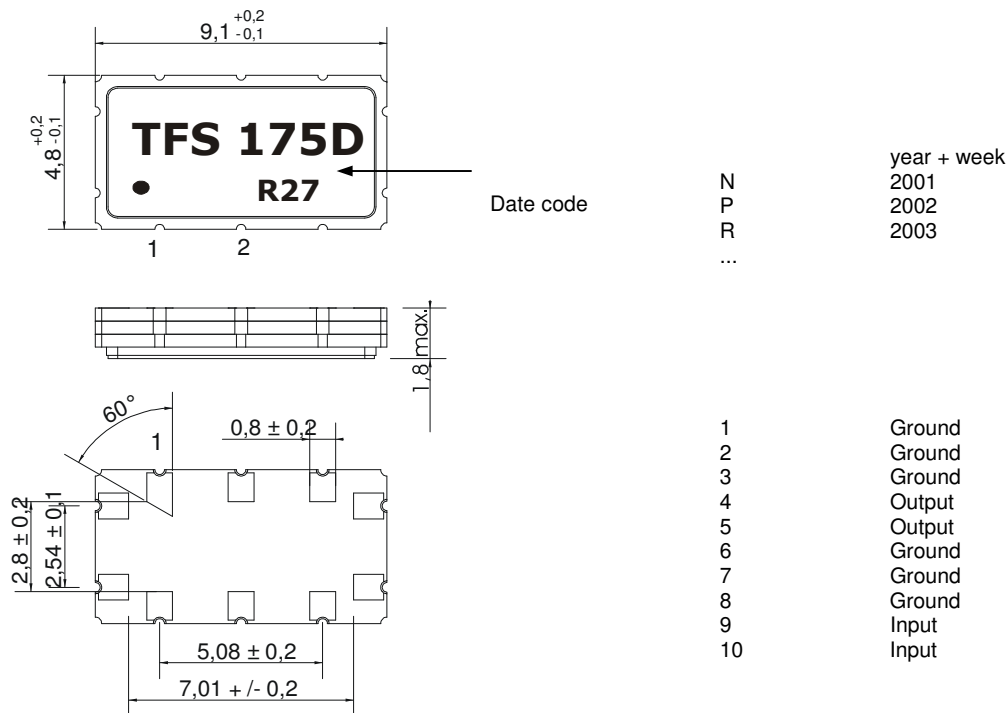
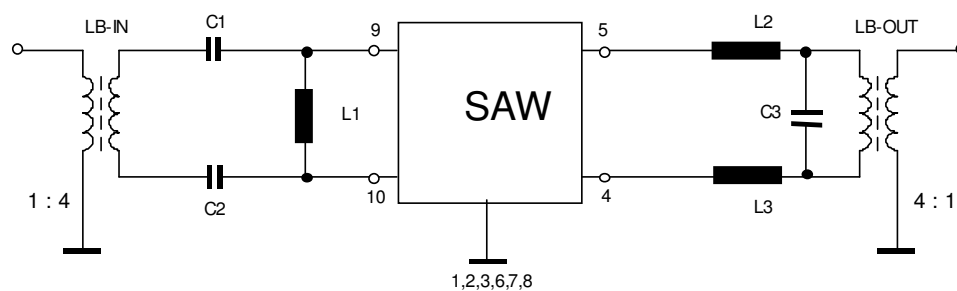
checked / approved: _____

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Construction and Pin Connection

(All dimensions in mm)

**200 Ω matching circuit:**

VI TELEFILTER**Filter specification****TFS 175 D****3/5****Stability Characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page 4;

Packing

Tape & Reel: DIN IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

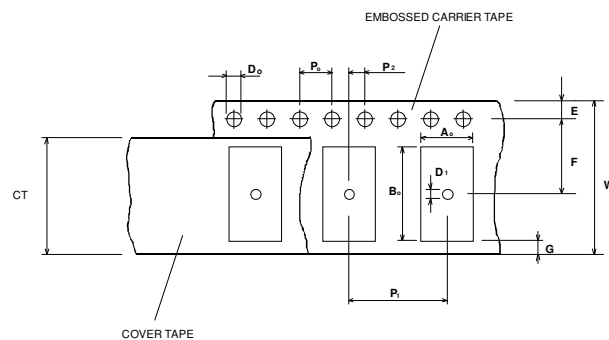
max. pieces of filters per reel:
reel of empty components at start:
reel of empty components at start including leader:
trailer

3000
min 300 mm
min 500 mm
min 300

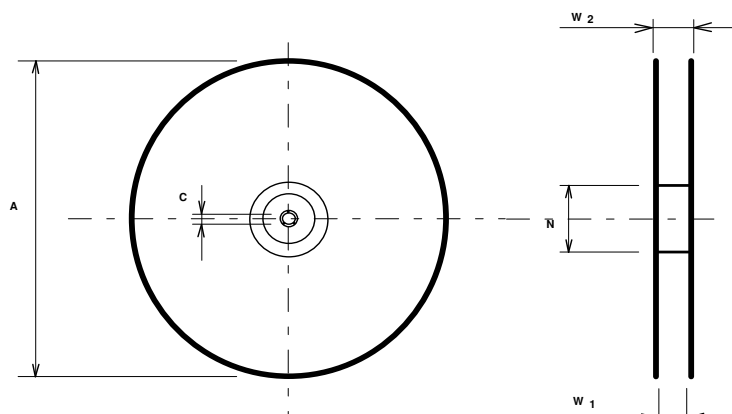
mm

Tape (all dimensions in mm)

W	: 16 ± 0,3
Po	: 4 ± 0,1
Do	: 1,5 ± 0,1
E	: 1,75 ± 0,1
F	: 7,5 ± 0,1
G (min)	: 0,60
P2	: 2 ± 0,1
P1	: 8 ± 0,1
D1(min)	: 1,5
Ao	: 5,30 ± 0,1
Bo	: 9,70 ± 0,1
CT	: 13,5 ± 0,1

**Reel (all dimensions in mm):**

A	: 330
W1	: 16,40 ± 2,0
W2 (max)	: 22,4
N (min)	: 50
C	: 13,0 ± 0,5/-0,2



The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Markings on the filters can be read if the upper side of the carrier tape is regarded with the sprocket holes on its right.

Tele Filter GmbH

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

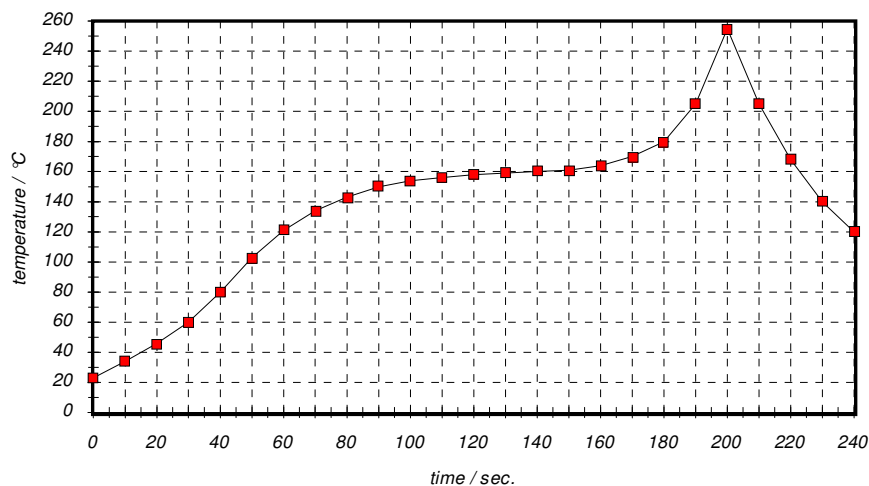
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter specification****TFS 175 D****5/5****History**

Version	Reason of Changes	Name	Date
1.0	Generation of "Development specification" according to customer requirements	Steiner	15.08.2001
1.1	- change of package - max. insertion loss : 8.5 dB	Pfeiffer	30.08.2001
1.2	- terminating impedance added - typical values added - matching configuration added	Pfeiffer	14.01.2002
1.3	- change of package - changing relative attenuation - terminating impedance changed - intermodulation added	Pfeiffer	10.04.2002
1.4	- decreasing insertion loss - extending storage temperature range	Pfeiffer	29.05.2002
1.5	- changing relative attenuation - changing span and limit of group delay ripple - limit of absolute group delay value added	Pfeiffer	01.07.2003

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.