

VI TELEFILTER**Filter Specification****TFS 211 C****1/5****Measurement condition**

Ambient temperature: 20 ... 25 °C
 Input power level: 5 ± 2 dBm
 terminating impedances *
 Input: 1,1 kΩ || -5.1pF
 Output: 1,1 kΩ || -5.2pF

Characteristics**Remark:**

The reference level for the relative attenuation a_{rel} of TFS 211C is the minimum of the pass band attenuation a_{min} . This value is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 1 dB filter attenuation level relative to the insertion loss a_e . The given values for the relative attenuation a_{rel} and the group delay ripple have to be reached at the frequencies given below, even if the centre frequency f_c is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

D a t a		typ. value		limit	
Insertion loss	$a_e = a_{min}$	6 ... 7 dB		min. 4,5 dB max. 8 dB	
Nominal frequency	f_N	-		211,0 MHz	
Centre frequency	f_c	211,0	MHz	-	
Relative attenuation	a_{rel}				
$f_N - 200$ kHz ... $f_N + 200$ kHz		0,5	dB	max. 1 dB	
$f_N \pm 1$ MHz ... $f_N \pm 1,8$ MHz		-		min. 30 dB	
$f_N \pm 600$ kHz ... $f_N \pm 1,2$ MHz		-		min. 10 dB	
$f_N \pm 1,2$ MHz ... $f_N \pm 1,8$ MHz		-		min. 20 dB	
$f_N + 1,8$ MHz ... $f_N + 7,0$ MHz		-		min. 30 dB	
$f_N + 7,0$ MHz ... $f_N + 1,0$ GHz		-		min. 45 dB	
$f_N + 1,0$ GHz ... $f_N + 2,0$ GHz		-		min. 40 dB	
$f_N + 2,0$ GHz ... $f_N + 3,0$ GHz		35	dB	-	
$f_N + 3,0$ GHz ... $f_N + 4,0$ GHz		30	dB	-	
Group delay ripple GD	$f_N - 200$ kHz ... $f_N + 200$ kHz	-		max. 350 ns	
Input power level		-		max. + 10 dBm	
Permissible DC voltage		-		max. 10 V	
Operating temperature range **		-		- 35 °C ... + 85 °C	
Storage temperature range		-		- 35 °C ... + 85 °C	
Temperature coefficient TC ***		- 0,036	ppm/K ²	-	
Frequency inversion temperature T ₀		25	°C	-	

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions, do not hesitate to ask for an application note or contact our design team.

**) If the filter is used between -10°C and -35°C all given frequencies may be changed down to max. - 30 kHz

***) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_0)^2 \times f_{T0}(\text{MHz})$

Generated:**Checked / approved:**


VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.



VI TELEFILTER**Filter Specification****TFS 211 C****2/5****Construction and pin connection**

(All dimensions in mm)

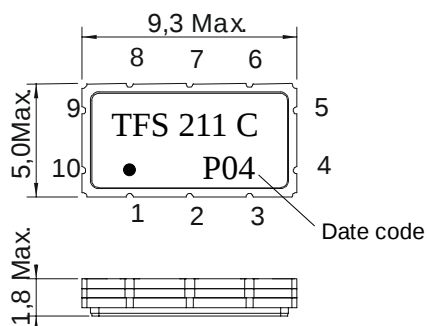

1	Ground
2	Ground
3	Ground
4	Output
5	Output RF return
6	Ground
7	Ground
8	Ground
9	Input
10	Input RF return

Datecode	Year + week
M	2000
N	2001
P	2002
...	

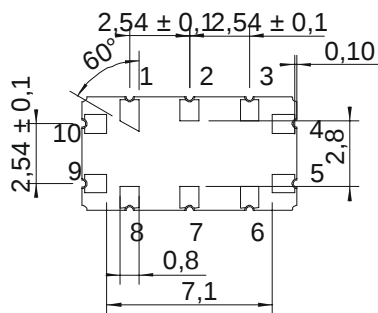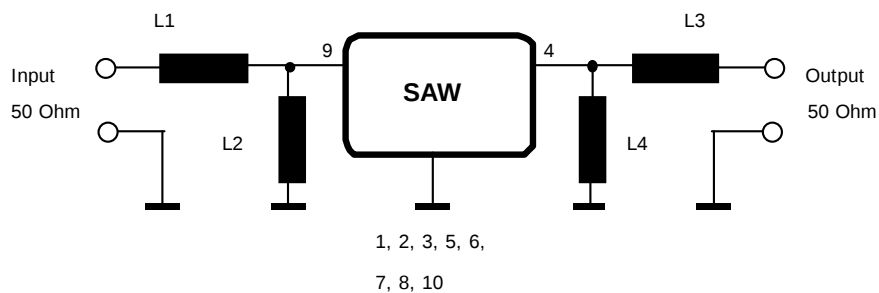**50 Ω test circuit**

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: yti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter Specification****TFS 211 C****3/5****Stability characteristics**

After the following tests the filter shall meet the whole specification:


1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 1,5 mm or 20g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page 4;

Packing


Tape & Reel: IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;
max. pieces of filters per reel: 3000
Reel of empty components at start: min 300 mm
Reel of empty components at start including leader: min 500 mm
Trailer min 300 mm

Tape (all dimensions in mm)

W	: 16 ± 0,3
Po	: 4 ± 0,1
Do	: 1,5 ± 0,1
E	: 1,75 ± 0,1
F	: 7,5 ± 0,1
G (min)	: 0,60
P2	: 2 ± 0,1
P1	: 8 ± 0,1
D1(min)	: 1,5
Ao	: 5,30 ± 0,1
Bo	: 9,70 ± 0,1
CT	: 13,5 ± 0,1

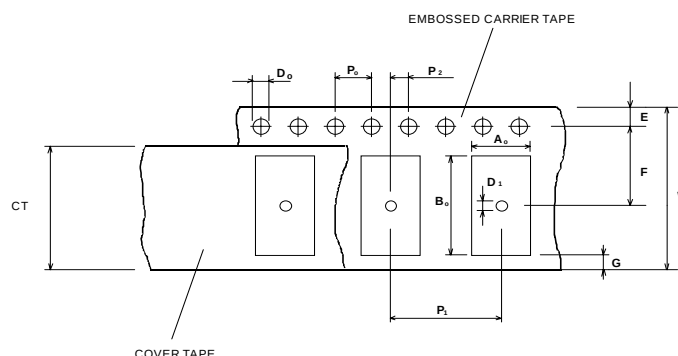**Reel (all dimensions in mm):**

A	: 330
W1	: 16,40 ± 2,0
W2 (max)	: 22,4
N (min)	: 50
C	: 13,0 ± 0,5/-0,2

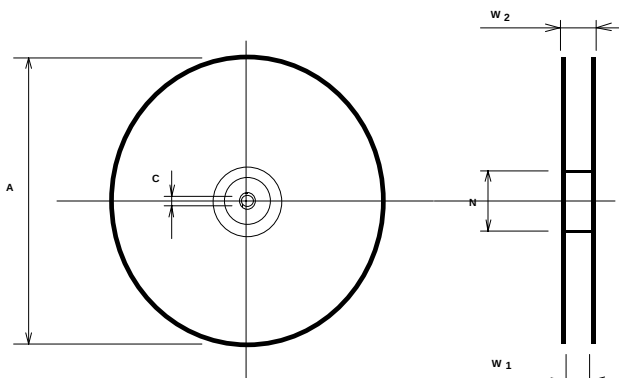

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Markings on the filters can be read if the upper side of the carrier tape is regarded with the sprocket holes on its right.

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter Specification****TFS 211 C****4/5****Air reflow temperature conditions**

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

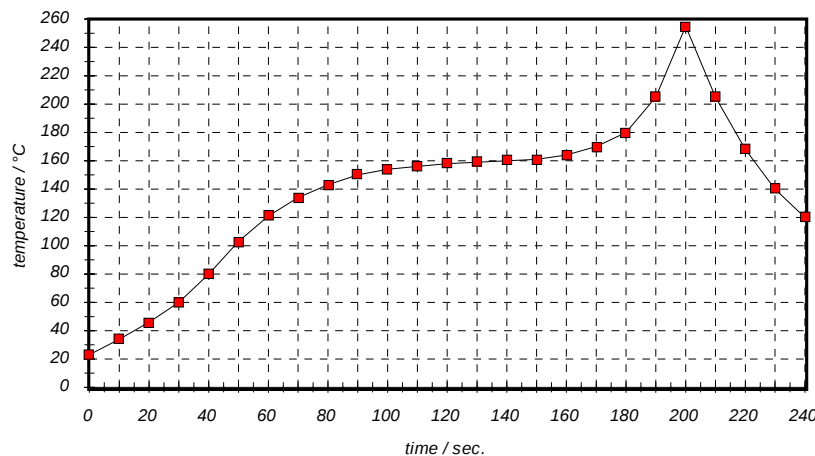
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: yti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter Specification****TFS 211 C****5/5****History**

Version	Reason of Changes	Name	Date
2.0	generate detailed specification - add terminating impedances - add matching circuit - add tape and reel dimensions, stability characteristics and reflow profile	Steiner	24.01.2001
2.1	Use harder conditions for "Stability characteristics" Change pin 1 marker Add footnotes Correct "Tape and reel" information	Herrler	15.08.2001
3.0	new packae with pin 1 marking introduced	Steiner	23.01.2002

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.