

VI RELEFILTER**Filter specification****TFS 311 A****1/4****Measurement condition**

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedances
 for input: 700 Ω // -2,1 pF
 for output: 700 Ω // -2,1 pF
 Ext coil: 82 nH

Construction

see page 2

Characteristics**Remark:**

Reference level for the relative attenuation a_{rel} of the TFS 311A is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_o is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed on 311,000 MHz without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below also if the centre frequency f_o is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_o .

| D a t a | | typ. value | tolerance / limit |
|--|-----------------|----------------------------|--------------------------|
| Insertion loss (Reference level) | $a_e = a_{min}$ | 4,0 dB | max 5 dB |
| Nominal frequency | f_N | - | 311,000 MHz |
| Centre frequency | f_o | 311,012 Mhz | - |
| Pass band ripple $f_N - 68$ kHz ... $f_N + 93$ kHz | | - | max 1,5 dB |
| Relative attenuation | a_{rel} | | |
| 311,0 Mhz - 68 kHz ... 311,0 Mhz + 93 kHz | | 0,5 dB | max 1,5 dB |
| 311,0 MHz ± 330 kHz ... 311,0 MHz ± 400 kHz | | 25 dB | min 18 dB |
| 311,0 MHz ± 400 kHz ... 311,0 MHz ± 600 kHz | | 32 dB | min 25 dB |
| 311,0 MHz ± 600 kHz ... 311,0 MHz ± 1,6 MHz | | 48 dB | min 30 dB |
| 311,0 MHz ± 1,6 MHz ... 311,0 MHz ± 3,0 MHz | | 50 dB | min 38 dB |
| 311,0 MHz ± 3,0 MHz ... 311,0 MHz ± 20 MHz | | 55 dB | min 45 dB |
| Group delay distortion | GDD | | |
| 311,0 MHz ± 50 kHz | | 0,4 μs | max 1,2 μs |
| 311,0 MHz ± 70 kHz | | 0,7 μs | max 1,5 μs |
| 311,0 MHz ± 100 kHz | | 1,0 μs | max 2,5 μs |
| Operating temperature range | | - 20 °C ... + 70 °C | |
| Storage temperature range | | - 30 °C ... + 85 °C | |
| Temperature coefficient of frequency | TC_f | - 0,036 ppm/K ² | - |
| Frequency inversion temperature | | + 25 °C | - |

Generated:**Checked / approved:**


VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.


Construction and pin configuration

(All dimensions in mm)

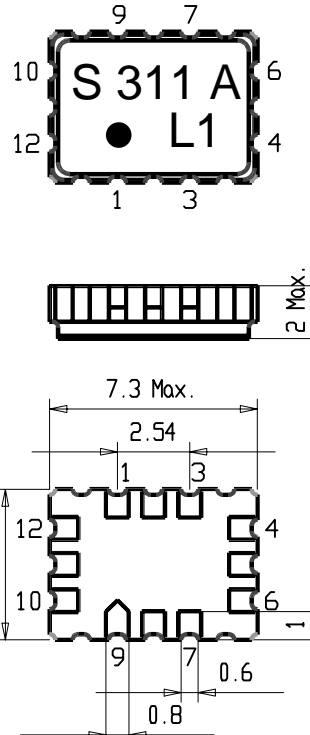


- 1 Output 2 Output
- 3 Ground 4 ext. Coil
- 5 Ground 6 Ground
- 7 Input 8 Input
- 9 Ground 10 Ground
- 11 Ground 12 Ground

50 Ohm Test circuit 1

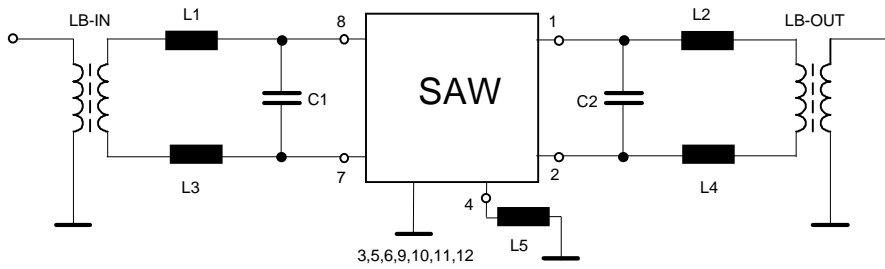

50 Ohm Test circuit 2

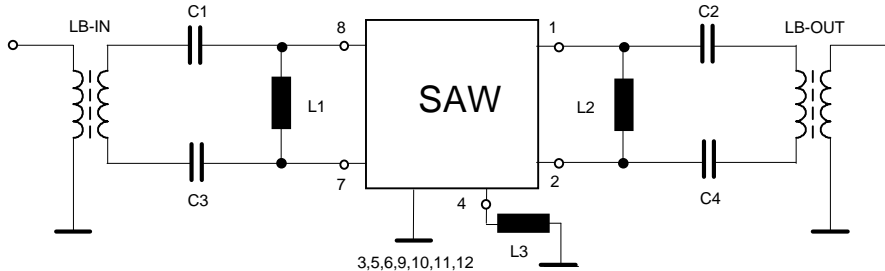

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI RELEFILTER**Filter specification****TFS 311 A****3/4****Stability characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 30g, 18 ms, half sine wave, 3 shocks each plane;
IEC 68 - 2 - 27
2. Vibration: 10 Hz to 150 Hz, 0.35 mm amplitude, 5g; 2 hours for 3 planes;
IEC 68 - 2 - 6
3. Damp heat: 90 % to 95 % rel. humidity, 40 °C, 10 days;
IEC 68 - 2 - 3
4. Resistance to solder heat (Reflow): 260 °C for 10 sec;


Packing

Tape & Reel: IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;


max. pieces of filters per reel: 3400

Tape (all dimensions in mm)

| | |
|---------|--------------|
| W | : 16 ± 0,3 |
| Po | : 4 ± 0,1 |
| Do | : 1,5 + 0,5 |
| D1 | : 1,5 + 0,5 |
| E | : 1,75 ± 0,1 |
| F | : 7,5 ± 0,1 |
| G (min) | : 0,75 |
| P2 | : 2 ± 0,05 |
| P1 | : 8 ± 0,1 |
| D1(min) | : 1,5 |
| Ao | : 5,4 ± 0,1 |
| Bo | : 7,4 ± 0,1 |

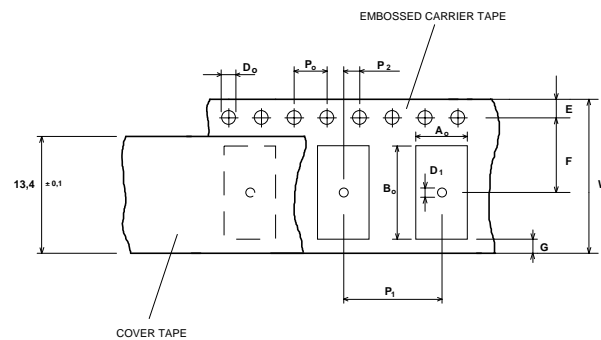**Reel (all dimensions in mm):**

| | | |
|----------|---|-----------|
| A | : | 330 |
| W1 | : | 16,4 +2 |
| W2 (max) | : | 22,4 |
| N (min) | : | >= 90 |
| C | : | 13 ± 0,25 |

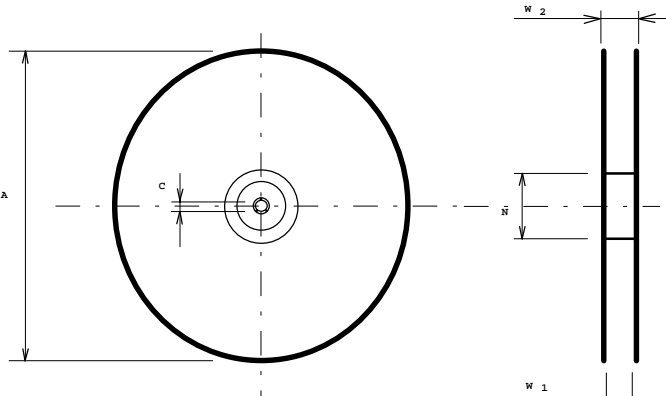

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. The marking of the filters is able to read if the view is directed on the upper side of the carrier tape with the sprocket holes on the right side of the tape.

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

1st and 2nd air reflow profile

| Name: | pre-heating periods | main-heating periods | peak temperature |
|--------------|---------------------|----------------------|------------------|
| Temperature: | 150 °C - 170 °C | over 200 °C | 255 °C ± 5 °C |
| Time: | 60 sec. - 90 sec. | 20 sec. - 25 sec. | |

Chip-mount air reflow profile

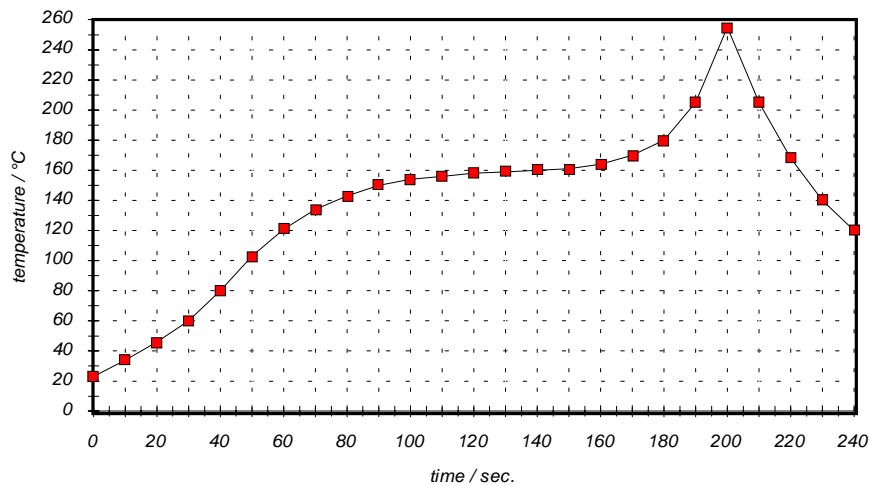


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

| time / sec. | temperature / °C | time / sec. | temperature / °C |
|-------------|------------------|-------------|------------------|
| 0 | 23 | 140 | 160 |
| 10 | 34 | 150 | 161 |
| 20 | 46 | 160 | 164 |
| 30 | 60 | 170 | 170 |
| 40 | 80 | 180 | 180 |
| 50 | 103 | 190 | 205 |
| 60 | 121 | 195 | 230 |
| 70 | 134 | 200 | 255 |
| 80 | 143 | 205 | 230 |
| 90 | 150 | 210 | 205 |
| 100 | 154 | 215 | 180 |
| 110 | 156 | 220 | 165 |
| 120 | 158 | 230 | 140 |
| 130 | 159 | 240 | 120 |