

Measurement condition

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedances *): for input: 170 Ω // -0,50 pF
 for output : 170 Ω // -0,50 pF

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 370 is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed at 370 MHz without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below even if the centre frequency f_c is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

| D a t a | | typ. value | | tolerance/limit | |
|---|-------------------------|------------|-------|-----------------|-----------|
| Insertion loss at 23 °C | $a_e = a_{min}$ | 3.3 | dB | 3.5 | dB |
| Insertion loss in OTR | $a_e = a_{min}$ | 3.8 | dB | 4.0 | dB |
| Nominal frequency | f_N | - | | 370 | MHz |
| Centre frequency | f_c | 370 | MHz | - | |
| Pass band ripple (at ambient temperature) | within $f_N \pm 10$ MHz | 1.5** | dB | max. | 2 dB** |
| Relative attenuation | a_{rel} | | | | |
| f_N | $\dots f_N \pm 10$ MHz | 1.30 | dB | max. | 3 dB |
| $f_N - 80$ MHz | $\dots f_N - 100$ MHz | 60 | dB | min. | 50 dB |
| $f_N - 35$ MHz | $\dots f_N - 55$ MHz | 60 | dB | min. | 30 dB |
| $f_N + 25$ MHz | $\dots f_N + 57.5$ MHz | 25 | dB | min. | 20 dB |
| $f_N + 57.5$ MHz | $\dots f_N + 82.5$ MHz | 60 | dB | min. | 40 dB |
| $f_N + 127.5$ MHz | $\dots f_N + 152.5$ MHz | 60 | db | min. | 57 dB |
| Intermodulation | IP3 | - | | min. | 20 dBm*** |
| Input power level | | - | | max. | 10 dBm |
| Permissible DC voltage | V_{DC} | - | | max. | 12 V |
| Operating temperature range | | | | - 25 °C ... + | 75 °C |
| Storage temperature range | | | | - 40 °C ... + | 85 °C |
| Temperature coefficient of frequency | TC_f^{****} | -72 | ppm/K | - | |

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions, do not hesitate to ask for an application note or contact our design team.

***) 2 dB bandwidth ($f_N \pm 10$ MHz) is guaranteed at ambient temperature (23 °C).

****) intermodulation signals: $f_N + 1$ MHz and $f_N + 2$ MHz, each of 10 dBm

*****) $\Delta f_c(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_A) \times f_{CTA}(\text{MHz})$



Generated:

Checked / Approved:

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

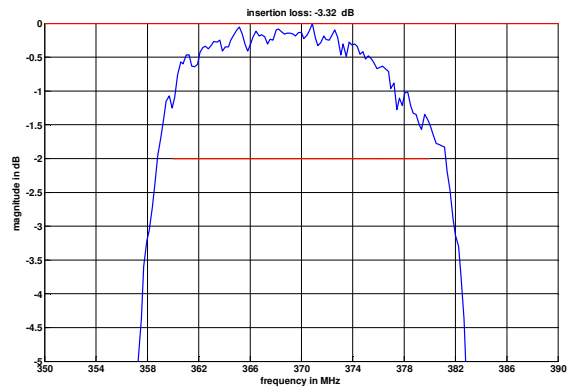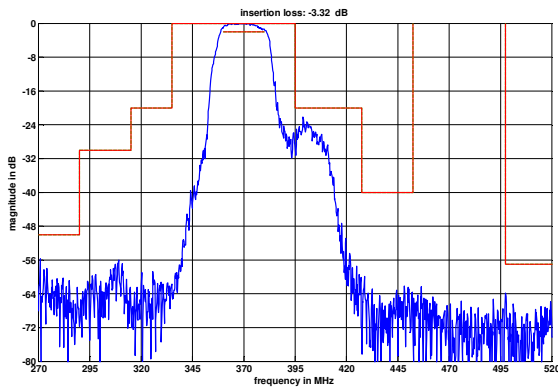

Construction and pin connection


(All dimensions in mm)

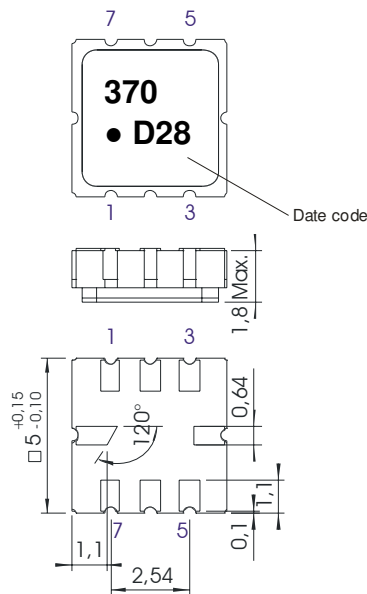

- 1 Output
- 2 Output RF Return
- 3 Ground
- 4 Ground
- 5 Input
- 6 Input RF Return
- 7 Ground
- 8 Ground

Date code: Year + week
 D 2013
 E 2014
 F 2015
 ...

50 Ω test circuit

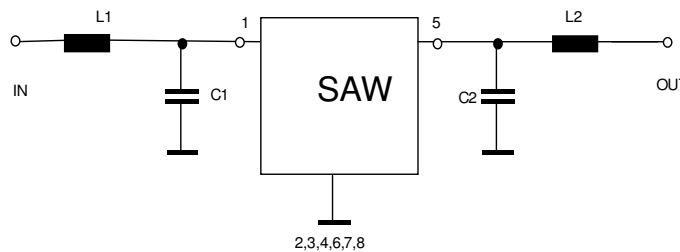

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

- 1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
- 2. Vibration: 10 Hz to 500 Hz, 0.35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 68 T2 - 6
- 3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 68 part 2 – 14 Test N
- 4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

This filter is RoHS compliant (2011/65/EU)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

| | |
|---|-------------|
| max. pieces of filters per reel: | 3000 |
| reel of empty components at start: | min. 300 mm |
| reel of empty components at start including leader: | min. 500 mm |
| trailer: | min. 300 mm |


Tape (all dimensions in mm)

- W : 12,00
- Po : 4,00
- Do : 1,50
- E : 1,75
- F : 5,50
- G(min) : 0,75
- P2 : 2,00
- P1 : 8,00
- D1(min) : 1,50
- Ao : 5,30
- Bo : 5,30
- Ct : 9,2 ± 0,1

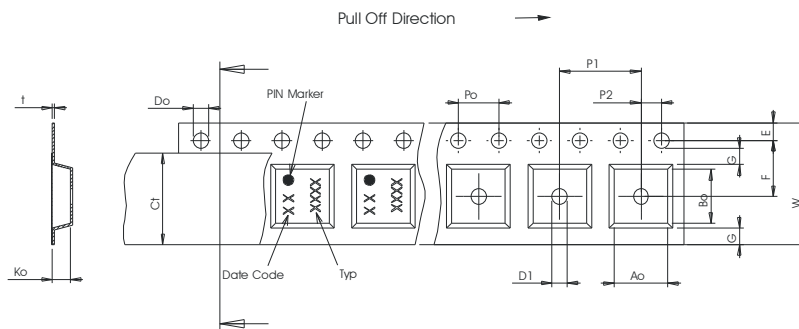

Reel (all dimensions in mm)

- A : 330
- W1 : 12,4 +2/-0
- W2(max) : 18,4
- N(min) : 50
- C : 13,0

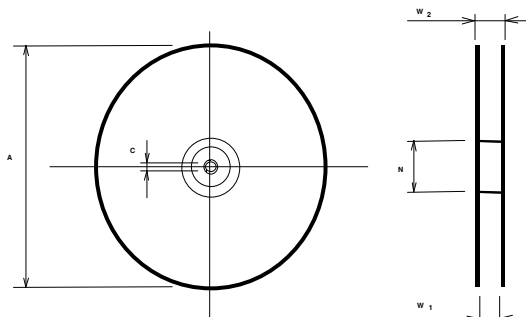


The minimum bending radius is 45 mm.

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

| Conditions | Exposure |
|--|-----------------------------|
| Average ramp-up rate (30°C to 217°C) | less than 3°C/second |
| > 100°C | between 300 and 600 seconds |
| > 150°C | between 240 and 500 seconds |
| > 217°C | between 30 and 150 seconds |
| Peak temperature | max. 260°C |
| Time within 5°C of actual peak temperature | between 10 and 30 seconds |
| Cool-down rate (Peak to 50°C) | less than 6°C/second |
| Time from 30°C to Peak temperature | no greater than 300 seconds |

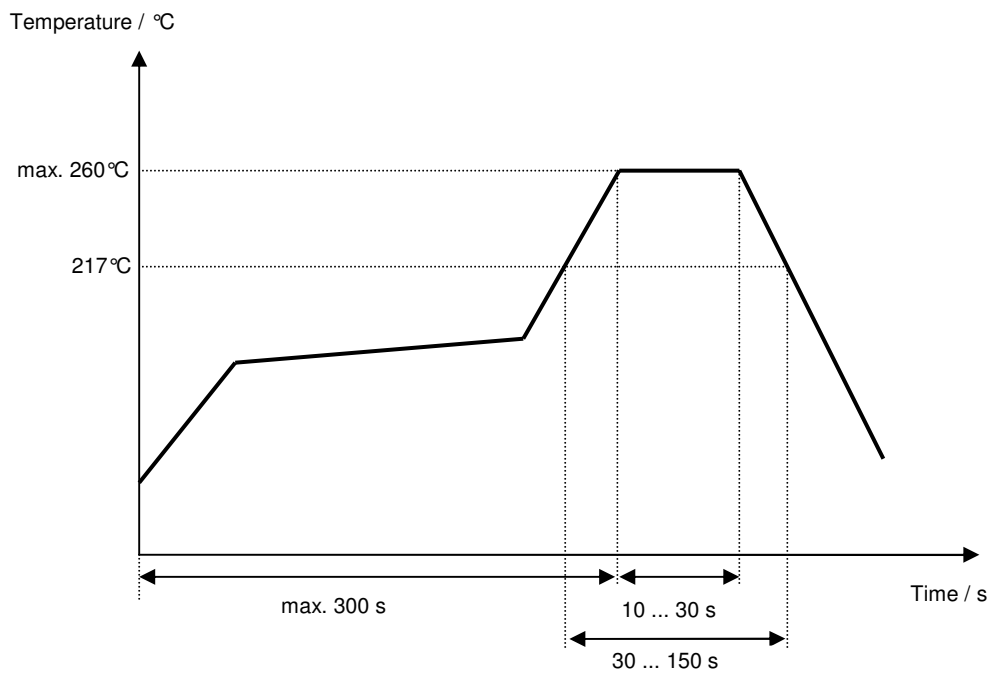Chip-mount air reflow profile

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

History

| Version | Reason of Changes | Name | Date |
|----------------|--|-------------|-------------|
| 1.0 | Generation of specification | Pfeiffer | 05.09.2002 |
| 1.1 | Changing package | Pfeiffer | 09.09.2002 |
| 1.2 | Change of specification of 2 dB bandwidth | Dr. Sabah | 21.10.2002 |
| 1.3 | Change from development specification to filter specification; add typical values and terminating impedance | Dr. Sabah | 29.10.2002 |
| 2.0 | Insertion loss in data table changed | Schönbein | 19.07.2013 |