

VI TELEFILTER**Filter specification****TFS 433 K****1/4****Measurement condition**

Ambient temperature: 23 °C

Input power level: 0 dBm

Terminating impedances:

Input: 370 Ω || - 0.9 pF

Output: 370 Ω || - 0.9 pF

Construction and pin connection

see page 2

Stability characteristics and packing

see page 3

Air reflow temperature conditions

see page 4

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 433 K is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_0 is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed on 433.42 MHz without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below also if the centre frequency f_0 is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_0 .

Data		typ. value	limit
Insertion loss	$a_e = a_{min}$ dB	4 dB	max. 5
(Reference level)			
Nominal frequency	f_N MHz	-	433,42
3 dB - bandwidth	BW kHz	260 kHz	min. 150
Relative attenuation	a_{rel}		
$f_N - 10$ MHz ... $f_N - 1,2$ MHz dB		-	min. 45
$f_N - 1,2$ MHz ... $f_N - 500$ kHz dB		-	min. 30
$f_N - 75$ kHz ... $f_N + 75$ kHz dB		-	max. 3
$f_N + 500$ kHz ... $f_N + 1,2$ MHz dB		-	min. 30
$f_N + 1,2$ MHz ... $f_N + 10$ MHz dB		-	min. 45
Temperature coefficient of the frequency	TC_f	- 0.032	ppm/K ² -
Operating temperature range		- 30 °C ... + 70 °C	
Storage temperature range		- 30 °C ... + 85 °C	

Frequency inversion temperature	To	25	°C	-
---------------------------------	----	----	----	---

Note 1) - Δf (Hz) = TC (ppm/K²) x (T - T₀)² x F_{T0} (MHz)

Generated: _____

Checked / approved: _____

VI TELEFILTER / Potsdamer Straße 18 / D 14 513 TELTOW
Phone: (+33 28) 47 84 52 / Fax: (+33 28) 47 84 30 / E-Mail: tft@telefilter.com

file: tfs433k.doc


version 1.1

05/98


VI TELEFILTER	Filter specification	TFS 433 K	2/4
----------------------	-----------------------------	------------------	------------

Construction, pin connection and 50 Ω matching network

(All dimensions in mm)

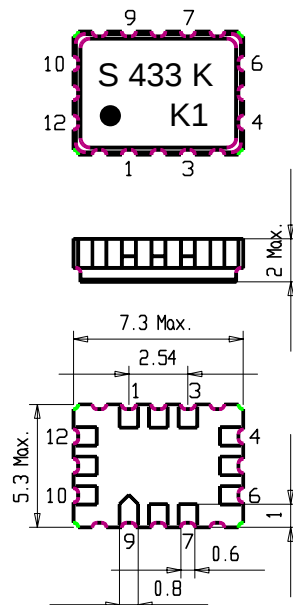

- | | |
|----|--------|
| 1 | Ground |
| 2 | Input |
| 3 | Ground |
| 4 | Ground |
| 5 | Ground |
| 6 | Ground |
| 7 | Ground |
| 8 | Output |
| 9 | Ground |
| 10 | Ground |
| 11 | Ground |
| 12 | Ground |

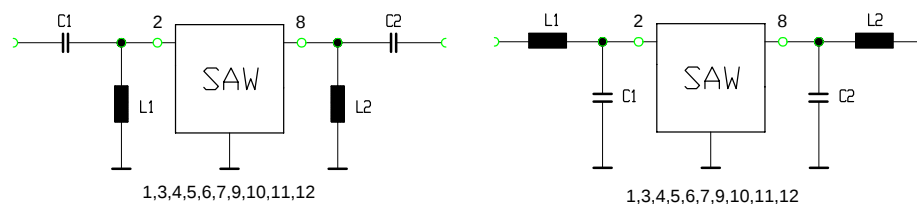

VI TELEFILTER / Potsdamer Straße 18 / D 14 513 TELTOW
Phone: (+33 28) 47 84 52 / Fax: (+33 28) 47 84 30 / E-Mail: tft@telefilter.com

file: tfs433k.doc

version 1.1

05/98

VI TELEFILTER

Filter specification

TFS 433 K

3/4

Stability Characteristics

After the following tests the filter shall meet the whole specification:


1. Shock: 100g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,075 mm or 1g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Damp heat: 90 % to 95 % rel. humidity, 40 °C, 10 days;
(steady state) DIN IEC 68 - 2 - 3
4. Resistance to solder heat (reflow): max. 2 times reflow process;
for temperature conditions refer to the attached "Air reflow temperature conditions" on sheet 4;

Packing

- Tape & Reel: IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;
- max. pieces of filters per reel: 3400


Tape (all dimensions in mm)

W	: 16 ± 0,3
P0	: 4 ± 0,1
D0	: 1,5 + 0,5
D1	: 1,5 + 0,5
E	: 1,75 ± 0,1
F	: 7,5 ± 0,1
G (min)	: 0,75
P2	: 2 ± 0,05
P1	: 8 ± 0,1
D1(min)	: 1,5
A0	: 5,4 ± 0,1
B0	: 7,4 ± 0,1

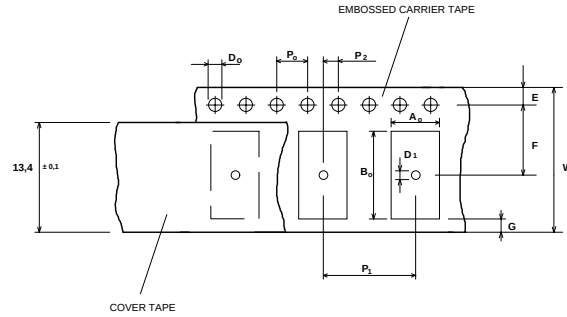

Reel (all dimensions in mm):

A	: 330
W1	: 16,4 +2
W2 (max)	: 22,4
N (min)	: >= 90
C	: 13 ± 0,25

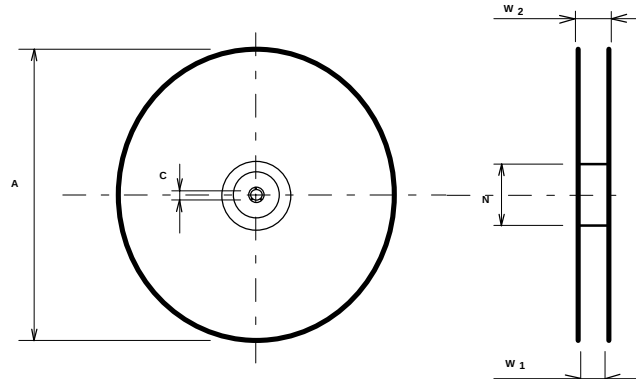

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. The marking of the filters is able to read if the view is directed on the upper side of the carrier tape with the sprocket holes on the right side of the tape.

VI TELEFILTER / Potsdamer Straße 18 / D 14 513 TELTOW
Phone: (+33 28) 47 84 52 / Fax: (+33 28) 47 84 30 / E-Mail: tft@telefilter.com

file: tfs433k.doc

version 1.1

05/98

VI TELEFILTER

Filter specification

TFS 433 K

4/4

Air reflow temperature conditions

1st and 2nd air reflow profile

<u>temperature</u>	Name:	pre-heating periods	main-heating periods	peak
	Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
	Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Chip-mount air reflow profile

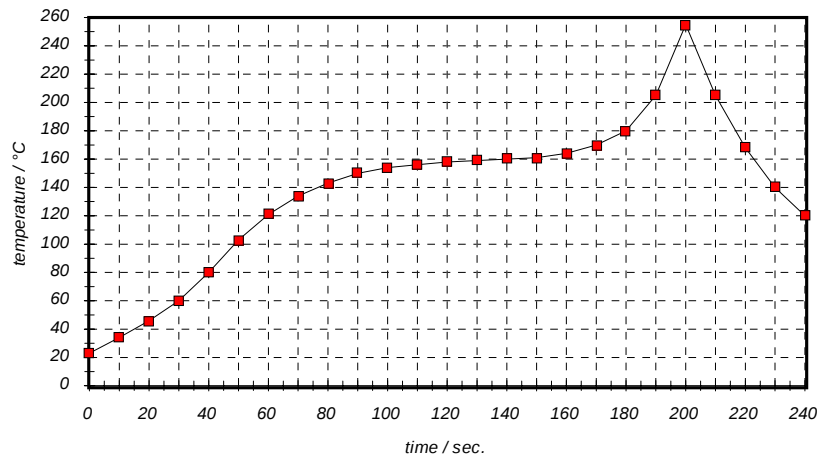


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: $\pm 5^{\circ}\text{C}$

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120