

Vectron International**Filter specification****TFS 434B****1/5****Measurement condition**

Ambient temperature:	25	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	256 Ω	-2,4 pF
Output:	256 Ω	-2,4 pF

Characteristics**Remark:**

The reference level for the relative attenuation a_{rel} of the TFS 434B is the minimum of the pass band attenuation. This value is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 434,46 MHz without any tolerance.

D a t a		typ. value		tolerance / limit		
Insertion loss (reference level)	a_e	1,7	dB	max.	4,0	dB
Nominal frequency	f_N	-			434,46	MHz
Passband	PB			f_N	$\pm$ 0,22	MHz
Pass band ripple	p-p	0,2	dB	max.	3,0	dB
Passband 2	PB2			f_N	$\pm$ 0,28	MHz
Pass band ripple 2	p-p	1	dB	max.	6,0	dB
Relative attenuation	a_{rel}					
f_N	$\dots f_N \pm$	0,22	MHz	0,2	dB	max. 3,0 dB
$f_N - 424,46$	MHz $\dots f_N -$	19,96	MHz	57	dB	min. 45,0 dB
$f_N - 19,96$	MHz $\dots f_N -$	5,96	MHz	50	dB	min. 40,0 dB
$f_N - 5,96$	MHz $\dots f_N -$	1,04	MHz	17	dB	min. 15,0 dB
$f_N + 0,96$	MHz $\dots f_N +$	8,04	MHz	26	dB	min. 10,0 dB
$f_N + 8,04$	MHz $\dots f_N +$	115,54	MHz	42	dB	min. 35,0 dB
$f_N + 115,54$	MHz $\dots f_N +$	565,54	MHz	56	dB	min. 42,0 dB
Input power level				max.	0	dBm
Permissible DC voltage				max.	0	V
Operable temperature range		-		- 45 °C ... + 90 °C		
Operating temperature range	OTR	-		+ 25 °C		
Storage temperature range		-		- 45 °C ... + 90 °C		
Frequency inversion temperature		25	°C			
Temperature coefficient of frequency	TC_f **	-0,03	ppm/K ²			

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.



**) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}^2) \times (T - T_0)^2 \times f_{T0}(\text{MHz})$.

Generated:**Checked / Approved:**

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

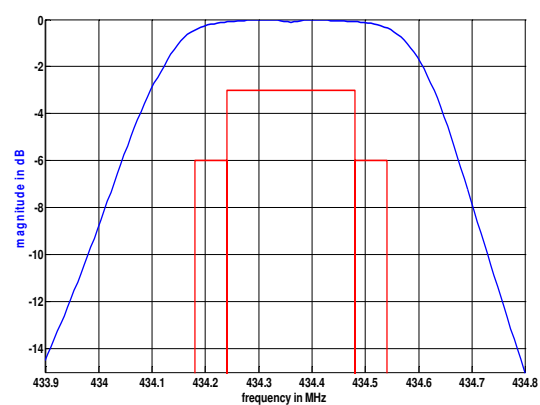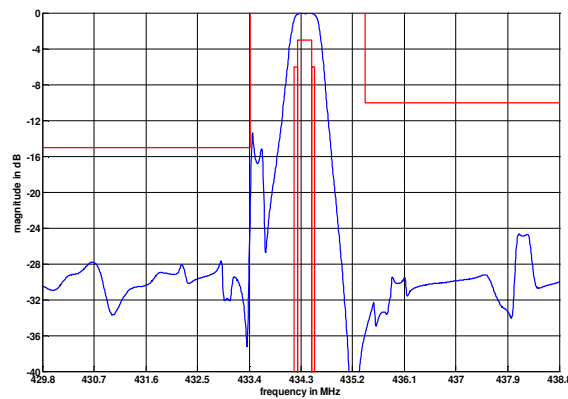


Construction and pin connection

(All dimensions in mm)

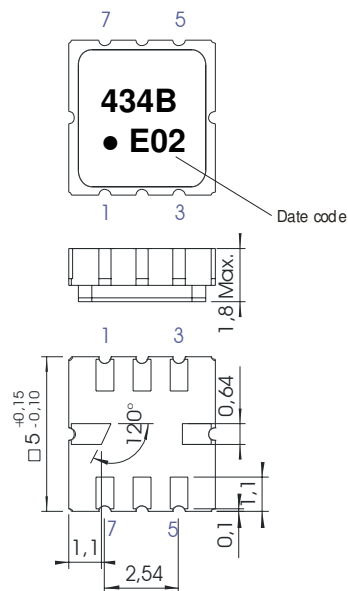

1	Input RF Return
2	Input
3	Ground
4	Ground
5	Output
6	Output RF Return
7	Ground
8	Ground

Date code:	Year + week
E	2014
F	2015
G	2016
...	

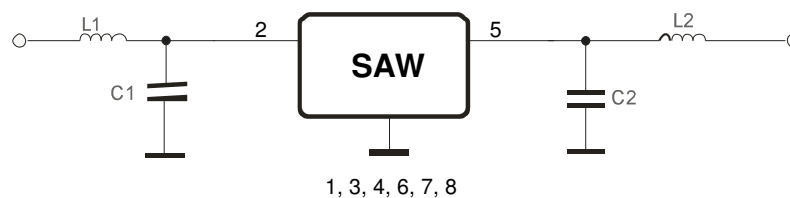50 Ω Test circuit

Tele Filter GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0.35 mm or g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions, see page 4: "Air reflow temperature conditions"

This filter is RoHS compliant (2011/65/EU)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;


max. pieces of filters per reel:	3000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)

W	: 12,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 5,50 ± 0,05
G(min)	: 0,75
P2	: 2,00 ± 0,05
P1	: 8,00 ± 0,1
D1(min)	: 1,50
Ao	: 5,30 ± 0,1
Bo	: 5,30 ± 0,1
Ct	: 9,5 ± 0,1

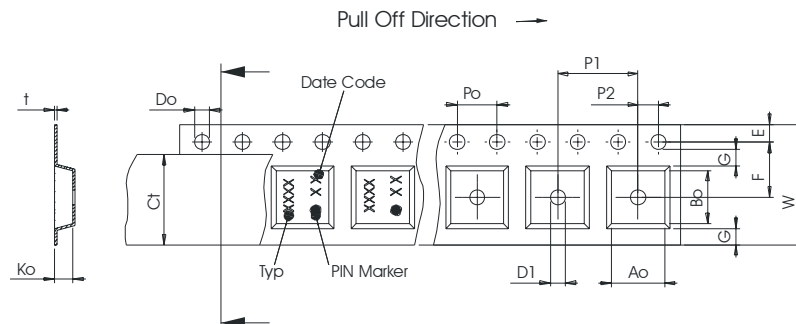**Reel (all dimensions in mm)**

A	: 330
W1	: 12,4 +2/-0
W2(max)	: 18,4
N(min)	: 50
C	: 13,0 +0,5/-0,2

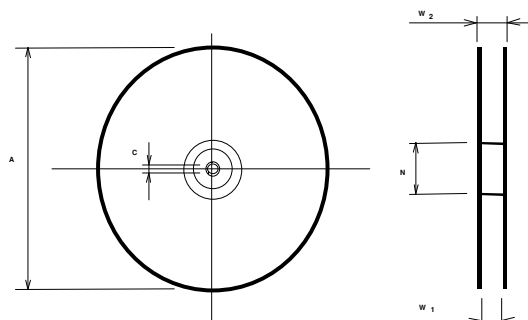


The minimum bending radius is 45 mm.

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

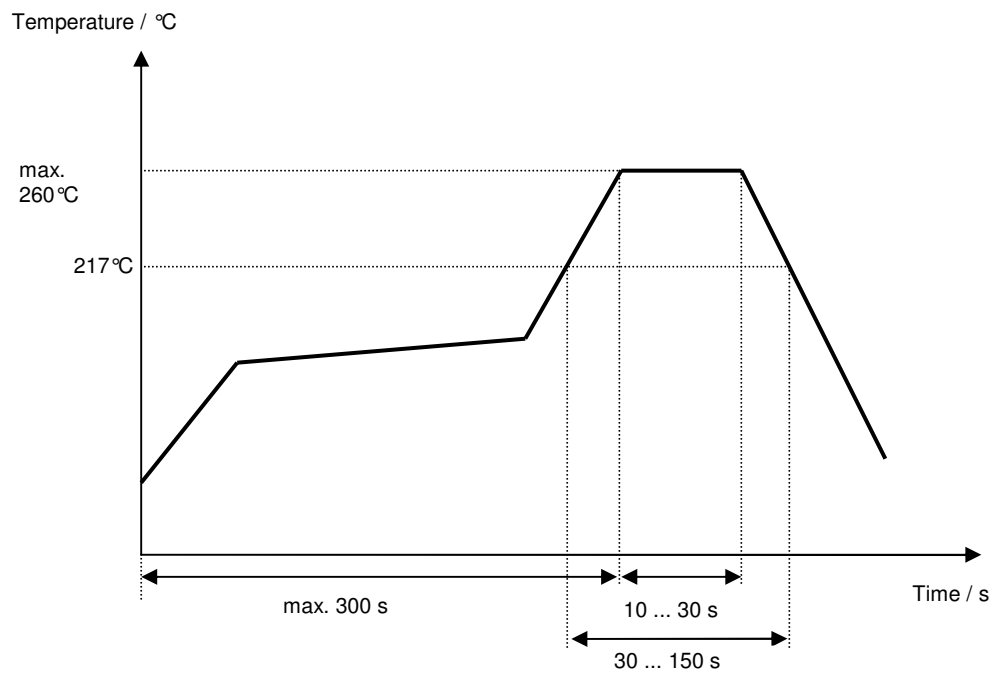Chip-mount air reflow profile

Vectron International**Filter specification****TFS 434B****5/5****History**

Version	Reason of Changes	Name	Date
1.0	- Generation of development specification	Strehl	16.01.2006
1.1	- Generation of filter specification - Added typical values - Added filter characteristic - Added test circuit	Martens	22.01.2007
1.2	- maximum input power updated	Kortenbeutel	07.01.2014