


Multilayer Ferrite Chip Beads




Chilisin offers a wide range of multi-layered ferrite chip beads with various sizes, frequency characteristics, and impedance values for EMI solutions. These ferrite formulas are used to compose seven types of EMI suppression chip beads: SB, GB, PB, UPB, NB, HF, and VPB series.

Product Identification

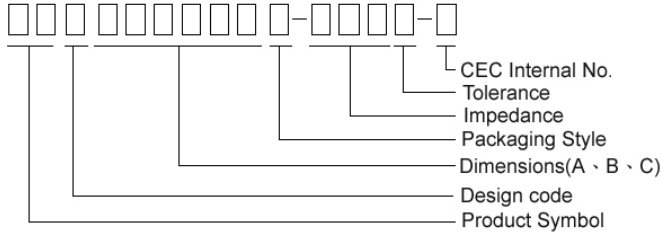

- Product symbol: SB, GB, PB, UPB, NB, HF, VPB
- Packaging: T : Tape and Reel ; B : Bulk
- Tolerance: Y = $\pm 25\%$; M = $\pm 20\%$; T: $\pm 30\%$
- Note: RoHS Compliant

Shape and Dimensions

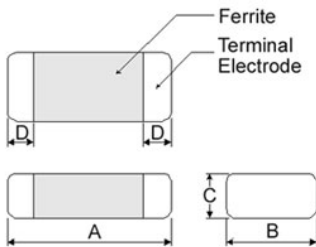


Dimensions in mm

TYPE	A	B	C	D
①060303	0.6 \pm 0.03	0.30 \pm 0.03	0.3 \pm 0.03	0.15 \pm 0.05
②100505	1.0 \pm 0.10	0.50 \pm 0.10	0.5 \pm 0.10	0.25 \pm 0.10
③160808	1.6 \pm 0.15	0.80 \pm 0.15	0.8 \pm 0.15	0.3 \pm 0.2
④201209	2.0 \pm 0.20	1.25 \pm 0.20	0.9 \pm 0.20	0.5 \pm 0.3
⑤201212	2.0 \pm 0.20	1.25 \pm 0.20	1.25 \pm 0.20	0.5 \pm 0.3
④321611	3.2 \pm 0.20	1.60 \pm 0.20	1.1 \pm 0.20	0.5 \pm 0.3
⑥321616	3.2 \pm 0.20	1.60 \pm 0.20	1.6 \pm 0.20	0.5 \pm 0.3
⑦322513	3.2 \pm 0.20	2.50 \pm 0.20	1.3 \pm 0.20	0.5 \pm 0.3
⑧451616	4.5 \pm 0.25	1.60 \pm 0.20	1.6 \pm 0.20	0.5 \pm 0.3
⑧453215	4.5 \pm 0.25	3.20 \pm 0.20	1.5 \pm 0.20	0.5 \pm 0.3

- ① : SB / PB / NB ② : SB / PB / NB / HF ⑦ : SB / PB
 ③ : SB / PB / NB / GB / UPB / HF / VPB ⑤ : UPB ⑥ : SB
 ④ : SB / PB / NB / GB / UPB ⑧ : PB / UPB

Recommended Pattern

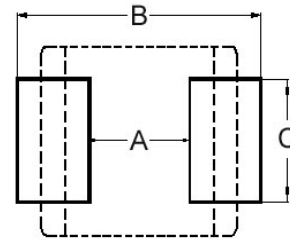

Dimensions in mm

TYPE	A	B	C
①060303	0.2 ~ 0.3	0.75 ~ 1.05	0.3
②100505	0.4	1.2 ~ 1.4	0.5
③160808	0.7 ~ 0.8	1.8 ~ 2.0	0.6 ~ 0.8
④201209	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2
⑤201212	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2
④321611	2.0	4.2 ~ 5.2	1.2
⑥321616	2.0	4.2 ~ 5.2	1.2
⑦322513	2.0	5.5 ~ 6.5	1.8
⑧451616	3.0	5.5 ~ 6.5	1.2
⑧453215	3.0	5.5 ~ 6.5	2.4

- * Don't apply narrower pattern than listed above to PB and UPB. Narrow pattern might cause excessive heat or open circuit.










Dimension Conversion

Code	Dimension in mm (AxBxC)	EIA
060303	0.6X0.3X0.3	0201
100505	1.0X0.5X0.5	0402
160808	1.6x0.8x0.8	0603
201209	2.0x1.2x0.9	0805
201212	2.0x1.2x1.25	0805
321611	3.2x1.6x1.1	1206
321616	3.2x1.6x1.6	1206
322513	3.2x2.5x1.3	1210
451616	4.5x1.6x1.6	1806
453215	4.5x3.2x1.5	1812




Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
PBJ160808T-100Y-N	100	10 \pm 30%	0.02	4000
PBJ160808T-260Y-N	100	26	0.03	3000
PBJ160808T-300Y-N	100	30	0.03	3000
PBJ160808T-400Y-N	100	40	0.035	3000
PBJ160808T-600Y-N	100	60	0.04	3000
PBJ160808T-800Y-N	100	80	0.05	2500
PBJ160808T-101Y-N	100	100	0.05	2500
PBJ160808T-121Y-N	100	120	0.08	2500
PBJ160808T-221Y-N	100	220	0.10	2000
PBJ160808T-331Y-N	100	330	0.15	1500
PBJ160808T-601Y-N	100	600	0.20	1000
PBJ160808T-751Y-N	100	750	0.25	800
PBJ160808T-102Y-N	100	1000	0.25	800

Test Instruments : Agilent E4991A Impedance / Material Analyzer

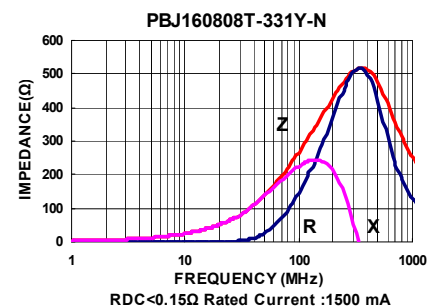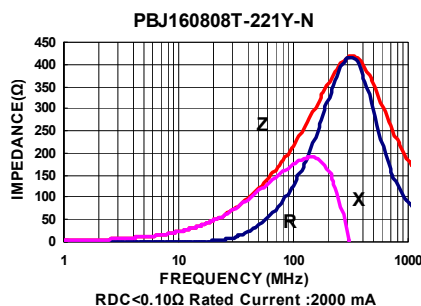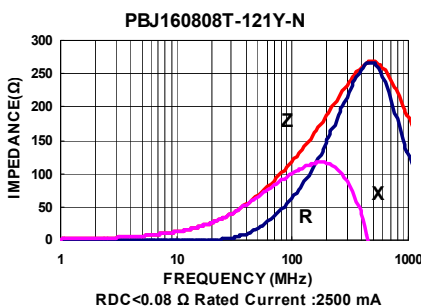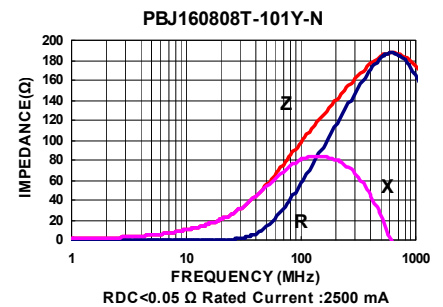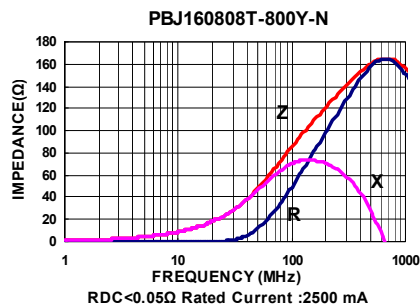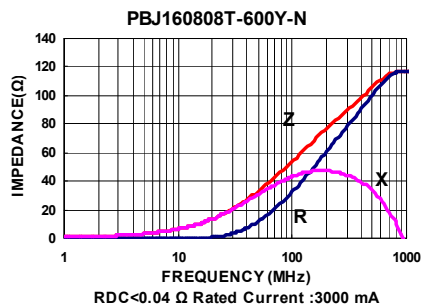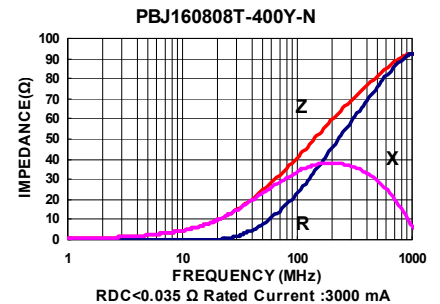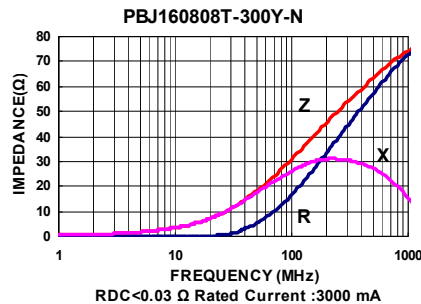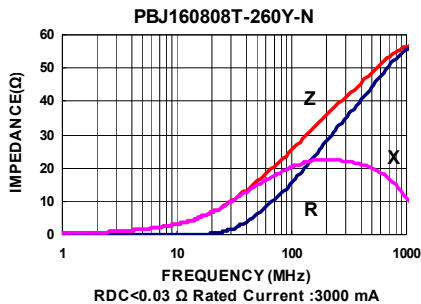










Test Instruments : Agilent E4991A Impedance / Material Analyzer

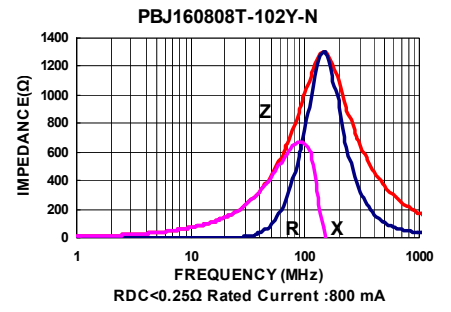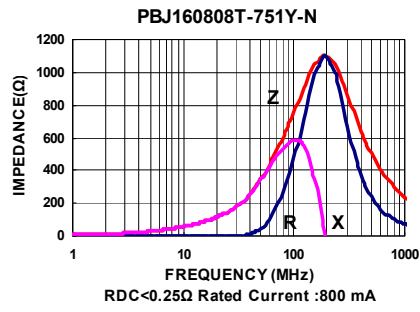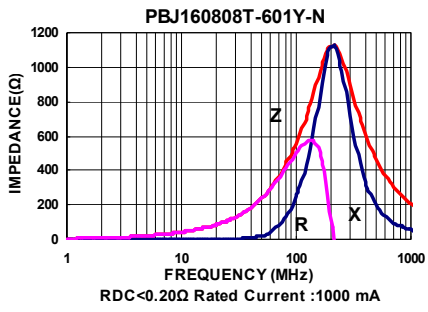




Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
PBJ201209T-110Y-N	100	11 $\pm 30\%$	0.01	6000
PBJ201209T-300Y-N	100	30	0.02	4000
PBJ201209T-500Y-N	100	50	0.025	3000
PBJ201209T-600Y-N	100	60	0.03	3000
PBJ201209T-900Y-N	100	90	0.04	3000
PBJ201209T-101Y-N	100	100	0.04	3000
PBJ201209T-121Y-N	100	120	0.04	3000
PBJ201209T-221Y-N	100	220	0.08	2000
PBJ201209T-301Y-N	100	300	0.08	2000
PBJ201209T-401Y-N	100	400	0.10	2000
PBJ201209T-601Y-N	100	600	0.12	2000
PBJ201209T-102Y-N	100	1000	0.15	1500

Test Instruments : Agilent E4991A Impedance / Material Analyzer

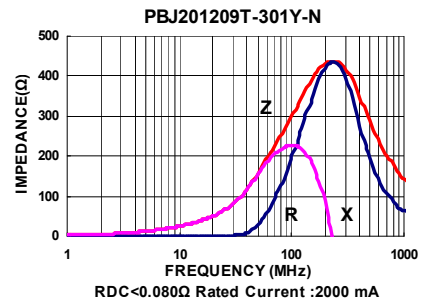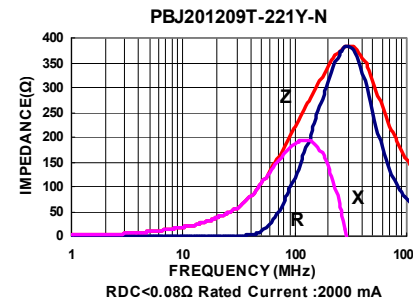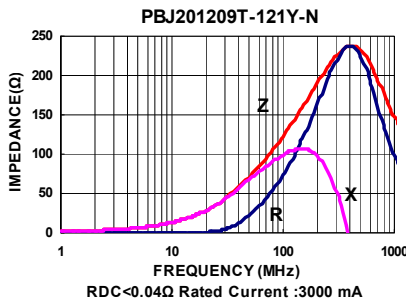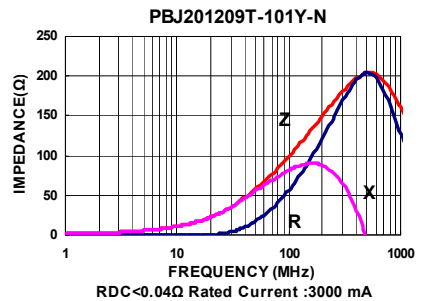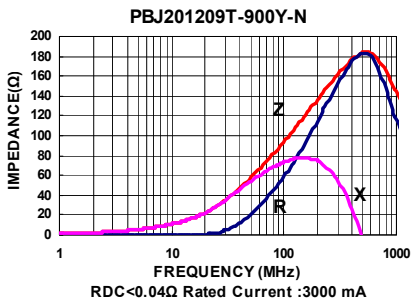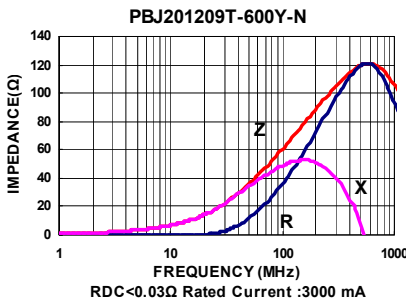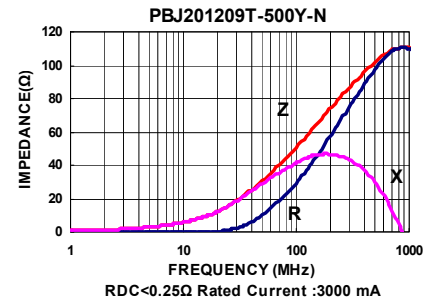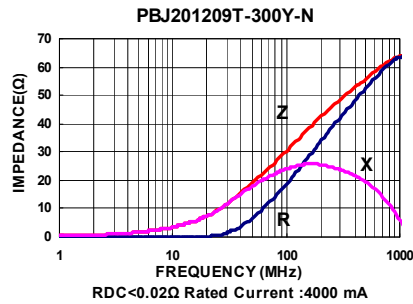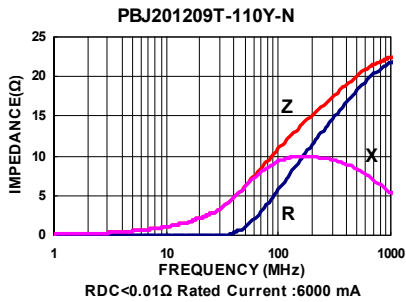







Test Instruments : Agilent E4991A Impedance / Material Analyzer

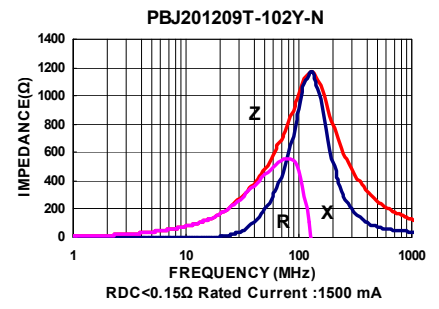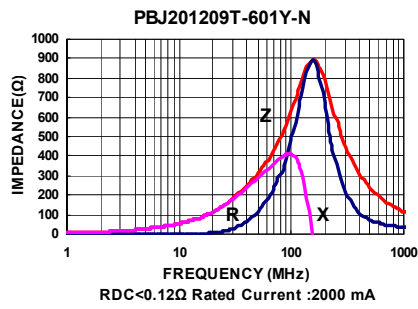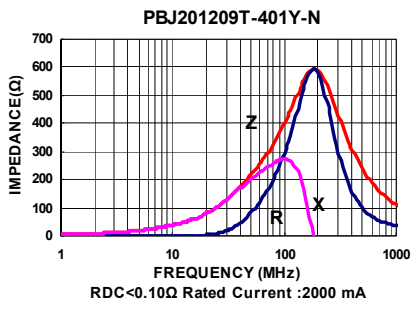

Electrical Characteristics


Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
PBJ321611T-110Y-N	100	11 \pm 30%	0.015	6000
PBJ321611T-310Y-N	100	31	0.015	4000
PBJ321611T-500Y-N	100	50	0.02	4000
PBJ321611T-800Y-N	100	80	0.025	3000
PBJ321611T-101Y-N	100	100	0.03	2500
PBJ321611T-121Y-N	100	120	0.03	2500
PBJ321611T-151Y-N	100	150	0.04	2000
PBJ321611T-221Y-N	100	220	0.05	2000
PBJ321611T-301Y-N	100	300	0.06	2000
PBJ321611T-401Y-N	100	400	0.10	2000
PBJ321611T-601Y-N	100	600	0.10	2000
PBJ321611T-102Y-N	100	1000	0.15	1200
PBJ321611T-122Y-N	100	1200	0.18	1000
PBJ321611T-152Y-N	100	1500	0.20	800

Test Instruments : Agilent E4991A Impedance / Material Analyzer

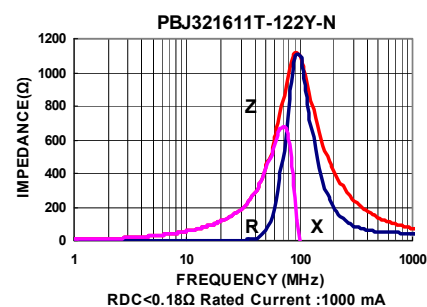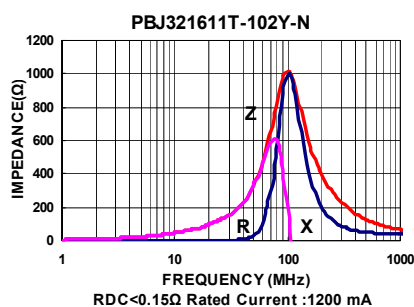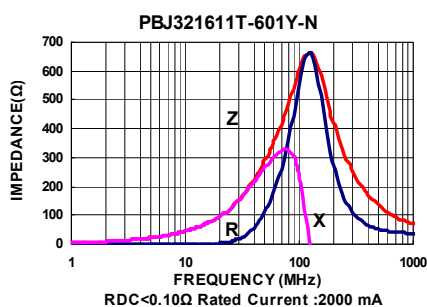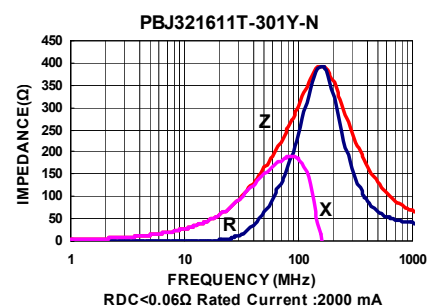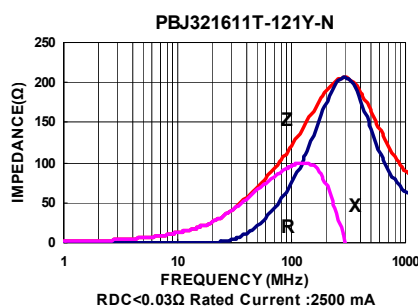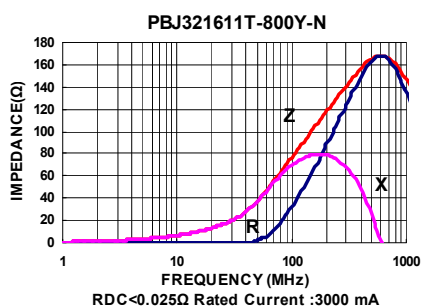


Packaging Specifications

Tape Dimensions

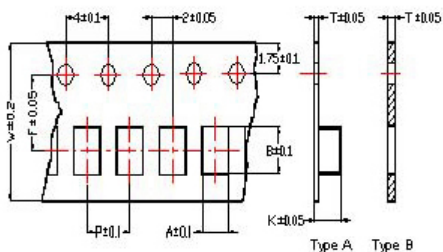


Tape Material

Carrier Tape: Polycarbonate (Tape A)
Carrier Tape: Paper (Tape B)
Cover Tape: Polystyrene

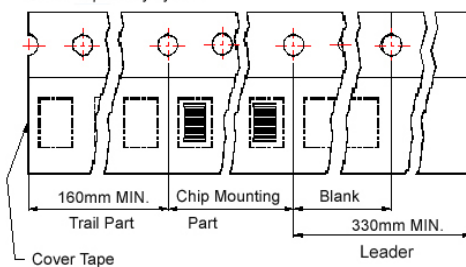

Reel Dimensions

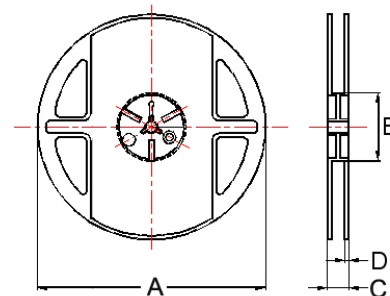

- ① : SB / PB / NB ② : SB / PB / NB / HF ③ : SB / PB
- ④ : SB / PB / NB / GB / UPB / HF / VPB ⑤ : UPB
- ⑥ : SB / PB / NB / GB / UPB ⑦ : SB ⑧ : PB / UPB

Dimensions in mm

TYPE	Tape Dimensions								Reel Dimensions				Quantity PCS / REEL
	A	B	T	W	P	F	K	Tape	A	B	C	D	
①060303	0.37	0.67	0.42	8.0	2.0	3.5	-	B	178	60	10	2	15000
②100505	0.65	1.15	0.60	8.0	2.0	3.5	-	B	178	60	12	2	10000
③160808	1.05	1.85	0.95	8.0	4.0	3.5	-	B	178	60	12	2	4000
④201209	1.50	2.30	0.97	8.0	4.0	3.5	-	B	178	60	12	2	4000
⑤201212	1.35	2.25	0.22	8.0	4.0	3.5	1.35	A	178	60	12	2	3000
④321611	1.88	3.50	0.22	8.0	4.0	3.5	1.27	A	178	60	12	2	3000
⑥321616	1.88	3.53	0.22	8.0	4.0	3.5	1.80	A	178	60	12	2	2000
⑦322513	2.77	3.42	0.22	8.0	4.0	3.5	1.55	A	178	60	12	2	2500
⑧451616	1.93	4.95	0.24	12	4.0	5.5	1.93	A	178	60	14	2	2000
⑨453215	3.66	4.95	0.24	12	8.0	5.5	1.85	A	178	60	14	2	1000