



ISO9001 & ISO14001 & TS16949 **CHILISIN ELECTRONICS CORP.**

Lead-Free & RoHs Compliance!!

SPECIFICATION FOR APPROVAL

CUSTOMER : _____

CUSTOMER P/N : _____

OUR DWG No : _____

QUANTITY : 0 **Pcs.** **DATE :** 2013/07/09

ITEM : MHCI12050-2R2M-R8

SPECIFICATION ACCEPTED BY:	
COMPONENT ENGINEER	
ELECTRICAL ENGINEER	
MECHANICAL ENGINEER	
APPROVED	
REJECTED	

奇力新電子股份有限公司
 CHILISIN ELECTRONICS CORP.
 NO.29,LANE 301,TEHHSIN ROAD,HUKOU,
 HSINCHU,TAIWAN,303,
 REPUBLIC OF CHINA
 TEL : (03) 599-2646
 FAX : (03) 599-9176
 E-mail : Sales@chilisin.com.tw
 http : //www.chilisin.com.tw

台北營業處
Taipei Office
 1F., No.2, Aly. 1, Ln. 235, Baoqiao Rd.,
 Xindian Dist., New Taipei City 231, Taiwan
 TEL : +886-2-6629-5588~9
 FAX : +886-2-6629-0088
 E-mail : Sales@chilisin.com.tw

東莞奇力新電子有限公司
 Chilisin Electronics (Dongguan) Co., Ltd.
 No. 78, Puxing Rd., Yuliangwei Administration Area,
 Qingxi Town, Dongguan City, Guangdong, China
 TEL : +86-769-8773-0251~3
 FAX : +86-769-8773-0232
 E-mail : cect@chilisin.com.tw

奇力新電子(蘇州)有限公司
 Chilisin Electronics (Suzhou) Co., Ltd.
 No.143,Song Shan Rd., Suzhou New District,
 Suzhou,China
 Postal Code:215129
 TEL:+86-512-6841-2350
 FAX:+86-512-6841-2356
 E-mail : suzhou@chilisin.com.tw


DRAWN BY 江鳳玉 linda.j	CHECKED BY 溫美玲 ling	APPROVED BY 張鈺雯 chang.yuwen
-------------------------	------------------------	--------------------------------

YG13700563

MHCI12050 Series Specification

1 Scope: This specification applies to Large current and Low Loss SMD Power INDUCTOR

2 Part Numbering: Product Identification

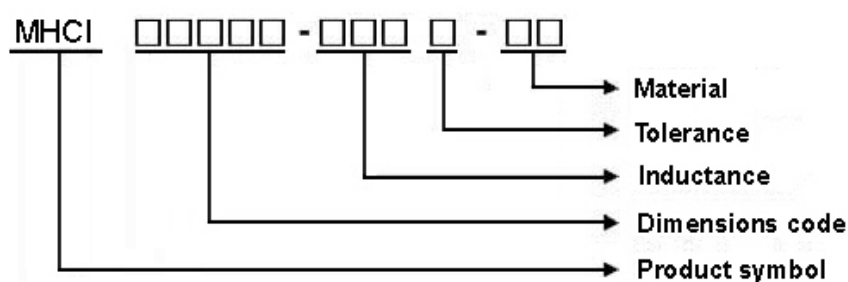


3 Rating:

Operating Temperature: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$ (Including self - temperature rise)

Storage Temperature: Under 25°C , Humidity < 75% RH

4 Marking:



Ex : MHC12050-2R2M-R8

Marking : 2R2


Marking color : Black

5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20±2°C
Humidity	Ordinary Humidity(25 to 85% RH)	60 to 70 % RH

MHCI12050 Series Specification

6 Configuration and Dimensions:

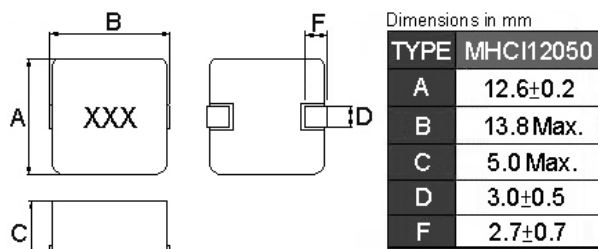

7 ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (uH)	Test Freq.	I _{rms} (A)Typ.	I _{sat} (A)Typ.	RDC (mΩ)Max.	Tolerance (±%)	Marking
MHC112050-2R2M-R8	2.2	100kHz,0.5V	20	22	5.2	20	2R2


NOTE:

1. **I_{rms}** DC current (A) that will cause an approximate ΔT of 40°C.
2. **I_{sat}** DC current (A) that will cause L_o to drop approximately 30%
3. Operating Temperature Range – 5 5 °C ~ 1 2 5 °C (Including self - temperature rise)
4. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions.
Circuit design 125°C under worst case operating conditions. component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

MHCI12050 Series Specification

8 MHCI12050 Series

8.1 Construction:

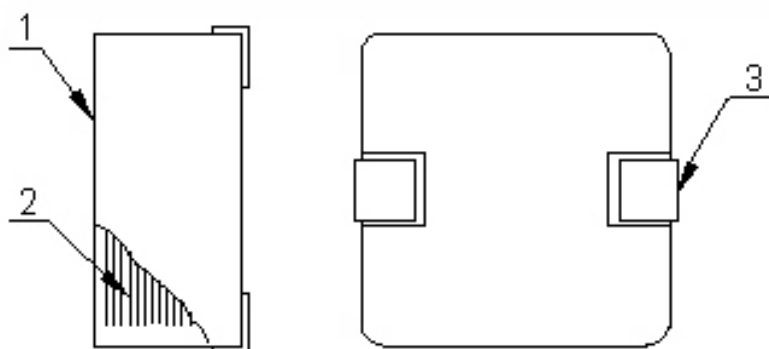

8.2 Material List:

ITEM	PART	DESCRIPTION
1	CORE	Alloy powder
2	WIRE	Copper wire
3	TERMINAL	TERMINAL COPPER



MHCI12050 Series Specification

9 Reliability Of Large Current and Low Loss SMD Power Inductor


1-1.Mechanical Performance

No	Item	Specification	Test Method
1-1-1	Vibration	Appearance: No damage Inductance: within $\pm 10\%$ of initial value	Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-2	Resistance to Soldering Heat	Appearance: No damage	Pre-heating: 150℃, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 260 ± 5 ℃ Immersion Time: 10 ± 1 sec
1-1-3	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150℃, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 245 ± 5 ℃ Immersion Time: 4 ± 1 sec
1-1-4	Resistance to solvent	There must be no change in appearance or obliteration of marking.	Inductors must withstand 6 minutes of alcohol or water.

1-2.Environmental Performance

No	Item	Specification	Test Method															
1-2-1	Temperature Shock	Appearance: No damage Inductance: within±10% of initial value	10 cycles (Air to Air) 1 cycles shall consist of: 30 minutes exposure to -55 ℃ 30 minutes exposure to 125 ℃ 15 seconds maximum transition between temperatures															
1-2-2	Temperature Cycle		One cycle:															
			<table><tr><th>Step</th><th>Temperature (℃)</th><th>Time (min)</th></tr><tr><td>1</td><td>-55±3</td><td>30</td></tr><tr><td>2</td><td>25±2</td><td>3</td></tr><tr><td>3</td><td>125±3</td><td>30</td></tr><tr><td>4</td><td>25±2</td><td>3</td></tr></table>	Step	Temperature (℃)	Time (min)	1	-55±3	30	2	25±2	3	3	125±3	30	4	25±2	3
			Step	Temperature (℃)	Time (min)													
			1	-55±3	30													
2	25±2	3																
3	125±3	30																
4	25±2	3																
Total: 100cycles Measured after exposure in the room condition for 24hrs																		
1-2-3	Humidity Resistance	Temperature: 40±2℃ Relative Humidity: 90 ~ 95% Time: 1000hrs Measured after exposure in the room condition for 24hrs																
1-2-4	Heat Life	Temperature: 85±3℃ Relative Humidity: 20% Applied Current: Rated Current Time: 1000hrs Measured after exposure in the room condition for 24hrs																
1-2-5	Cold Resistance	Temperature: -55±3℃ Relative Humidity: 0% Time: 1000hrs Measured after exposure in the room condition for 24hrs																

MHCI12050 Series Specification

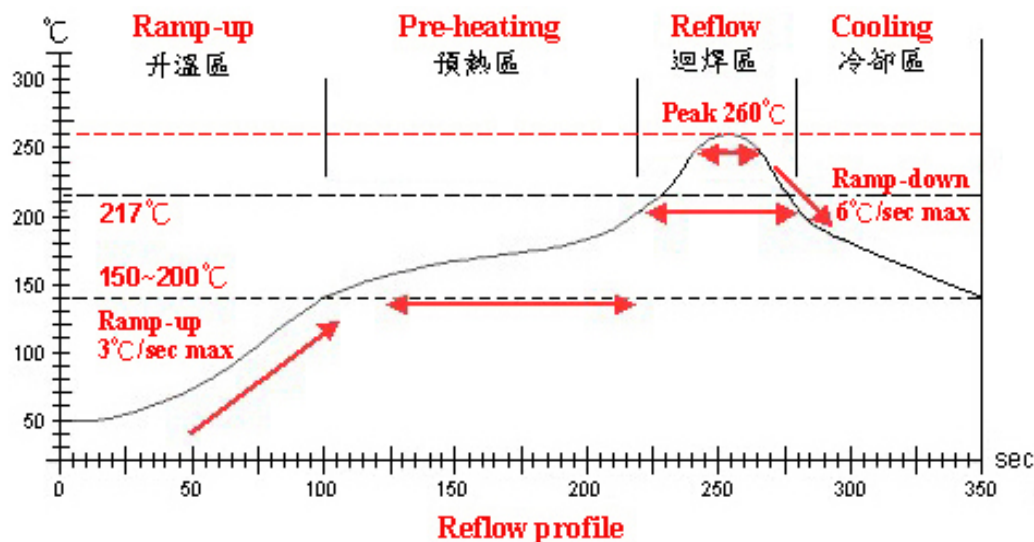

Lead-Free(LF) 標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T. ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp. ~ 150°C
標準時間 Time spec.	—	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	—
實際時間 Time result	—	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	—

NOTE :


1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow

MHCI12050 Series Specification

11 PACKAGING

11.1 Packaging -Cover tape


The force for tearing off cover tape is 10 to 130 grams in the arrow direction.

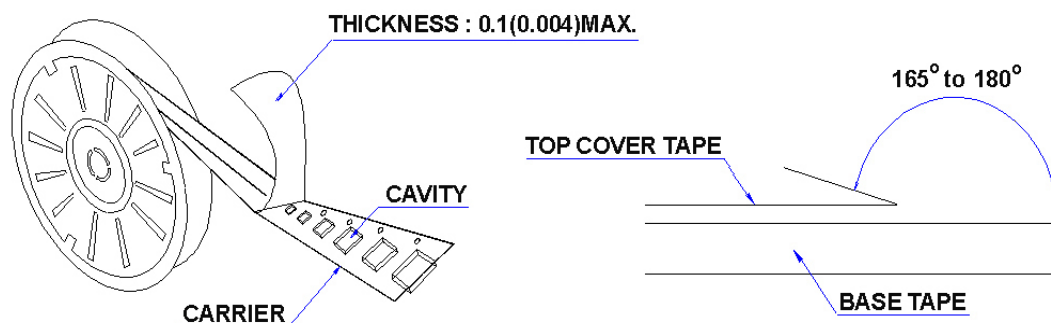

11.2 Packaging Quantity

TYPE	BULK	PCS/REEL
MHCI12050	✓	500

11.3 Reel Dimensions

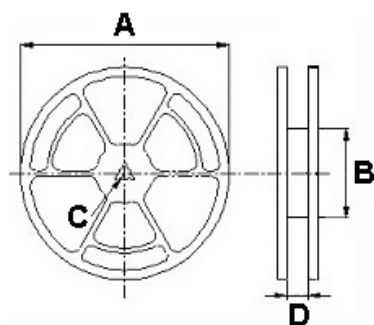


Reel Dimensions : mm

TYPE	A	B	C	D
MHCI12050	330	100	13	24.4

MHCI12050 Series Specification

11 PACKAGING


11.4 Tape Dimensions in mm

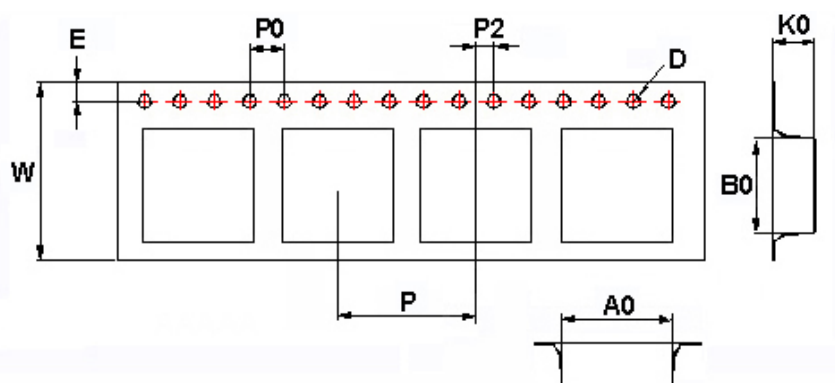

TYPE	A0	B0	K0	D	E	W	P	P0	P2
MHC12050	13	14	5.25	1.55	1.75	24	16	4	2

12 Recommended Pattern

PAD LAYOUT

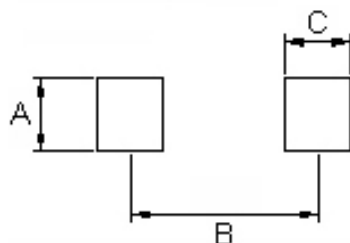

Dimensions in mm

TYPE	A(in/mm)	B(in/mm)	C(in/mm)
MHC12050	0.197/5.0	0.413/10.5	0.157/4.0

13 Note:

1. Please make sure that your product is has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)



ISO9001 & ISO14001 & TS16949 **CHILISIN ELECTRONICS CORP.**

MHCI12050 Series Specification

14 Curve:

