

50/60HZ PCB MOUNT TRANSFORMERS EI RANGE

TYPE EI30/18.5 OUTPUT POWER 2.5VA

ELECTRICAL CHARACTERISTICS

Ferriwo Code	Secondary (V)	Current (A)	No-Load (output)	Pin Pr/Sec	Fig.
FWE130721	6	0.417	9.3	1-5/7-9	1
FWE130722	7.5	0.333	11.63	1-5/7-9	1
FWE130723	9	0.278	13.95	1-5/7-9	1
FWE130724	12	0.208	18.6	1-5/7-9	1
FWE130725	15	0.167	23.25	1-5/7-9	1
FWE130726	18	0.139	27.9	1-5/7-9	1
FWE130727	24	0.104	37.2	1-5/7-9	1
FWE130728	30	0.083	46.5	1-5/7-9	1
FWE130741	2 x 6	2 x 0.208	2 x 9.3	1-5/6-7,9-10	2
FWE130742	2 x 7.5	2 x 0.167	2 x 11.63	1-5/6-7,9-10	2
FWE130743	2 x 9	2 x 0.139	2 x 13.95	1-5/6-7,9-10	2
FWE130744	2 x 12	2 x 0.104	2 x 18.60	1-5/6-7,9-10	2
FWE130745	2 x 15	2 x 0.083	2 x 23.25	1-5/6-7,9-10	2
FWE130746	2 x 18	2 x 0.069	2 x 27.90	1-5/6-7,9-10	2
FWE130747	2 x 24	2 x 0.052	2 x 37.20	1-5/6-7,9-10	2


SPECIFICATION:

- It is miniaturized to be easily PCB mounted.
- It has very high insulation of 4000Vrms Hi-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C.
- Potted under vacuum
- Split-Bobbin Winding
- Sort-Circuit-Proof
- Primary: 230V/115V
- Frequency 50/60Hz
- Temperature class to 70°C/B
- Weight: 0.100kg

COMMON APPLICATIONS:

- Medical equipment
- Industrial equipment
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

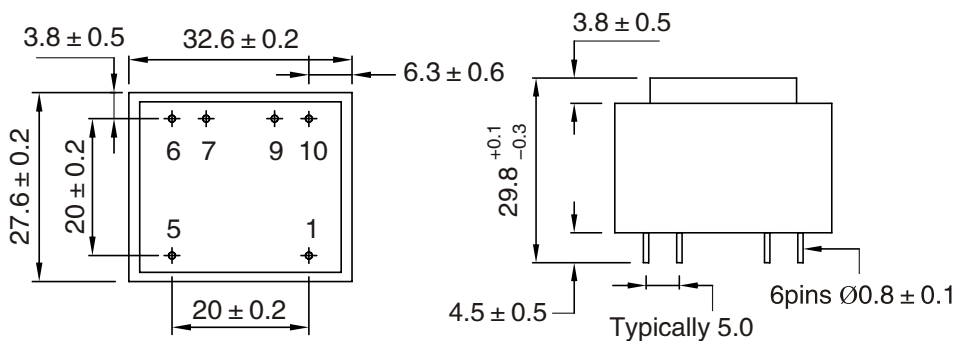

Recommended Drill-hole Diameter for 1.3mm pins

TECHNICAL INFORMATION

