

50/60HZ PCB MOUNT TRANSFORMERS EI RANGE

TYPE EI60/21.0 OUTPUT POWER 20.0VA

ELECTRICAL CHARACTERISTICS

Ferriwo Code	Secondary (V)	Current (A)	No-Load (output)	Pin Pr/Sec	Fig.
FWE160221	6	3.333	7.8	1-7/9-13	1
FWE160222	7.5	2.667	9.75	1-7/9-13	1
FWE160223	9	2.222	11.7	1-7/9-13	1
FWE160224	12	1.667	15.6	1-7/9-13	1
FWE160225	15	1.333	19.5	1-7/9-13	1
FWE160226	18	1.111	23.4	1-7/9-13	1
FWE160227	24	0.833	31.2	1-7/9-13	1
FWE160228	30	0.667	39	1-7/9-13	1
FWE160241	2 x 6	2 x 1.667	2 x 7.8	1-7/8-10,12-14	2
FWE160242	2 x 7.5	2 x 1.333	2 x 9.75	1-7/8-10,12-14	2
FWE160243	2 x 9	2 x 1.111	2 x 11.70	1-7/8-10,12-14	2
FWE160244	2 x 12	2 x 0.833	2 x 15.60	1-7/8-10,12-14	2
FWE160245	2 x 15	2 x 0.667	2 x 19.50	1-7/8-10,12-14	2
FWE160246	2 x 18	2 x 0.556	2 x 23.40	1-7/8-10,12-14	2
FWE160247	2 x 24	2 x 0.417	2 x 31.20	1-7/8-10,12-14	2


SPECIFICATION:

- It is miniaturized to be easily PCB mounted.
- It has very high insulation of 4000Vrms Hi-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C.
- Potted under vacuum
- Split-Bobbin Winding
- Sort-Circuit-Proof
- Primary: 230V/115V
- Frequency 50/60Hz
- Temperature class to 50°C/B
- Weight: 0.550kg

COMMON APPLICATIONS:

- Medical equipment
- Industrial equipment
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

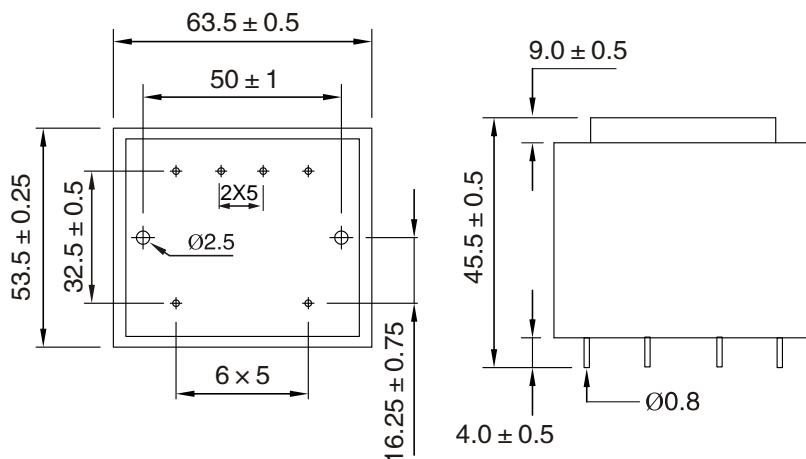

Recommended Drill-hole Diameter for 1.3mm pins
Recommended Drill-hole Diameter for Mountings=4mm

TECHNICAL INFORMATION

